

## **NOTES**

1. Do not scale from this drawing. 2. All dimensions are in meters unless otherwise noted. 3. Information shown outside extent of works is for

illustrative purposes only. 4. To be read in conjunction with all other Landscape Architect's drawings

Drawings YPB-ALA-XX-XX-DR-L-00000 Series, Details YPB-ALA-XX-XX-DR-L-10000 Series, NBS - YPB-ALA-XX-XX-SP-L-00002 MMP - YPB-ALA-XX-XX-RP-L-00001

5. To be read in conjunction with all other discipline's drawings and specifications.

6. Specification and details of build ups to paving, kerbs, edges and structures to be advised by Project Civil

7. All subbases to retaining features, walls to Project Engineers details.

8. Formations levels are to be inspected and approved by the Project Engineer. 9. Highway works by others, cross over and carpark please refer to Civils package.

10. Drainage design, manhole cover positions & final levels to be coordinated with Drainage Engineers 11. Lighting design, to be coordinated with M&E details,

columns are shown for coordination only. 12. Landscape contractor is responsible for all area take offs. Any areas or quantities shown are for information only. Plant numbers should account for slopes/gradients. 13. Plant substitutions require approval from Landscape Architect / Client due to safeguarding and health and safety issues in relation to SEND client requirements. 14. Any work to existing trees to be carried out by a suitability qualified Tree Surgeon; All work to be carried out in accordance with AMS. Tree Consultant to advise

on all issues regarding works in relation to trees. 15. The following elements are intended to be specialist design packages, subcontractor / specialist to submit drawings for approval prior to procurement and manufacture: a. street furniture b. canopies c. cycle stores. d. metalwork package fencing, e. gates etc. Access control to be coordinated by M&E Consultant tbc by School. Sports furniture and finishes. 16. The following elements are intended to be specialist

design packages, subcontractor / specialist designer to

submit drawings for approval prior to procurement and manufacture: a. all street furniture b. external classroom canopies c. cycle store d. metalwork package including all fencing, handrails, gates etc. Access control / Gate suiting to be coordinated with WCL/ M&E Consultant tbc by School & DCC. sports furniture / finishes / linemarkings. All specialists to submit drawings for approval prior to procurement and manufacture and ensure these are designed in accordance with all relevant BS Standards and Guidance.


levels and dimensions before construction. Any discrepancies are to be brought to the attention of Ares Landscape Architects before commencing on site. 18. Refer to designer risk assessment for details in relation to safeguarding / security issues due to SEND client requirements.

17. The contractor is to check all setting out information,

19. Site clearing works as per Ecological and Arboricultural reports. 20. Topsoil / Subsoil stripping to be carried out in accordance with Arboricultural Input for site strip, storage, remediation and repositioning on site. To be carried out in accordance with the Wates Soft Work

21.Provide small gaps of at least 15cm x 15cm at designated points under all boundary fences to allow movement of small mammals/hedgehogs. These are indicatively shown on the sustainability and biodiversity plans YPB-ALA-00-XX-DR-L00029 in 11No. locations. 22. Incoming services, meter, substations to MEP Information. Please refer to their package for detailed

23. Drainage design by Drainage Engineer, please refer to Curtins information.

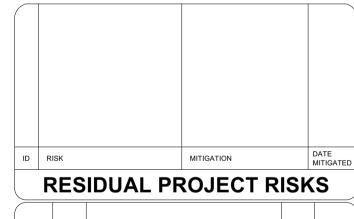

07/09/2022 P10 Updated Red Line for Planning Issue 30/08/2022 P09 Issued for Planning DATE REV DESCRIPTION OF REVISION

**REVISIONS** 

STATUS

S2 - FOR PLANNING



51 Eyre Lane t: 0114 276 2000 e: hello@aresdesign.co.uk w: ares.eu.com

**Wates Construction Ltd** 

PROJECT TITLE:

Ysgol Plas Brondyffryn SEN

DRAWING TITLE :

**Landscape General Arrangement** 

PAPER SIZE : APPROVED BY : A1

DRAWING NUMBER:

YPB-ALA-00-XX-DR-L-00004 S2

REVISION:

26/01/2022

ALA725

ALA PROJECT CODE:

STATUS: