



YG X5070

BLUE-COATED SOLID CARBIDE END MILLS

For Machining High Hardened Steels
For High Speed Cutting & Dry Cutting
For Mold & Die

YG YG-1 CO., LTD.

HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice. Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application. YG-1 or publishers are not liable for any damage for use of the information.





Search 'YG-1' on social media outlets

CASE STUDY - TEST 1

► Solid Carbide 6 Flute 45° Helix End Mill for Hardened Steels

Tools	6Flute, X5070 45° Helix
Size	Ø16xØ16x40x110
Work Material	- DIN:X40CrMoV5-1(1.2344) - JIS:SKD61(HRc50) - AISI:H13
Cutting Speed	96.5 m/min.
R.P.M	1,920 rev./min.
Feed	912 mm/min.
Milling Method	Down & Side Cutting
Milling Depth	Axial : 24 mm Radial : 0.96 mm
Coolant	Dry Cut
Overhang	52 mm
Machine	Machining Center

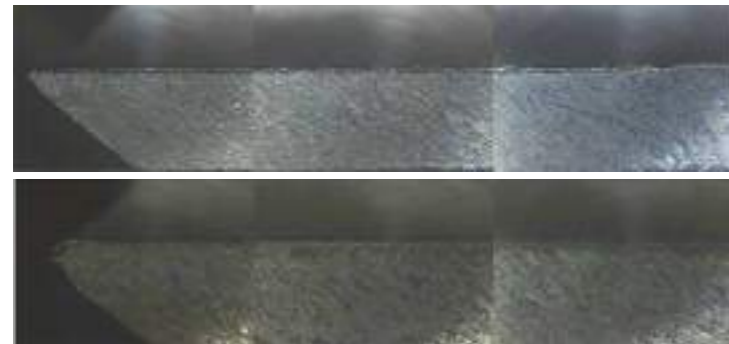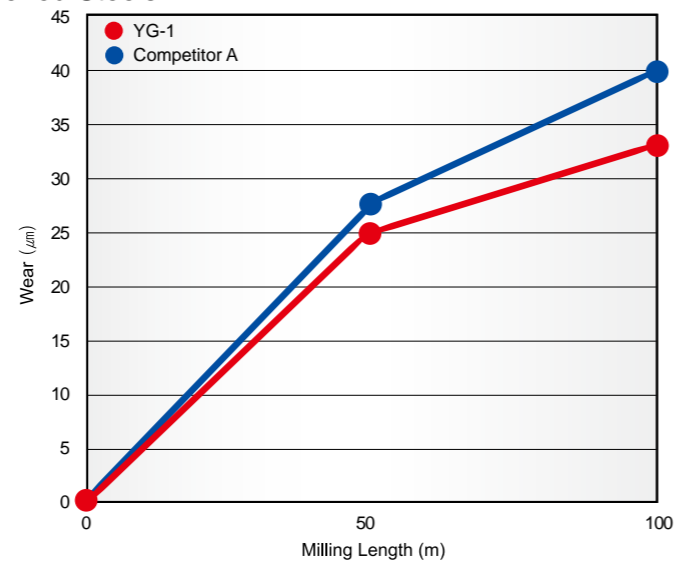



YG-1
(Total Milling Length 100m)

Competitor A
(Total Milling Length 100m)

CASE STUDY - TEST 2

► Solid Carbide 4 Flute Center Match Ball End Mill for Hardened Steels

Tools	4Flute, X5070 Ball Nose
Size	Ø10xØ10x18x100
Work Material	- DIN:X155CrVMo12-1(1.2379) - JIS:SKD11(HRc60) - AISI:D2
Cutting Speed	210.486 m/min.
R.P.M	6,700 rev./min.
Feed	2,800 mm/min.
Milling Method	Side Cutting
Milling Depth	Axial : 0.2 mm Radial : 0.5 mm
Coolant	Oil Mist
Overhang	32 mm
Machine	Machining Center

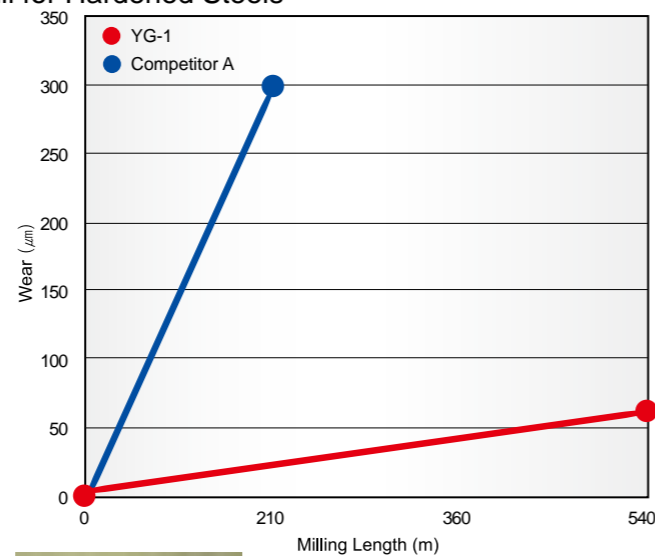


YG-1
(Total Milling Length 540m)



Competitor A
(Total Milling Length 210m)

High Feed End Mill Capabilities :

- ✓ High speed roughing
- ✓ High speed finishing... Mirror-like surface

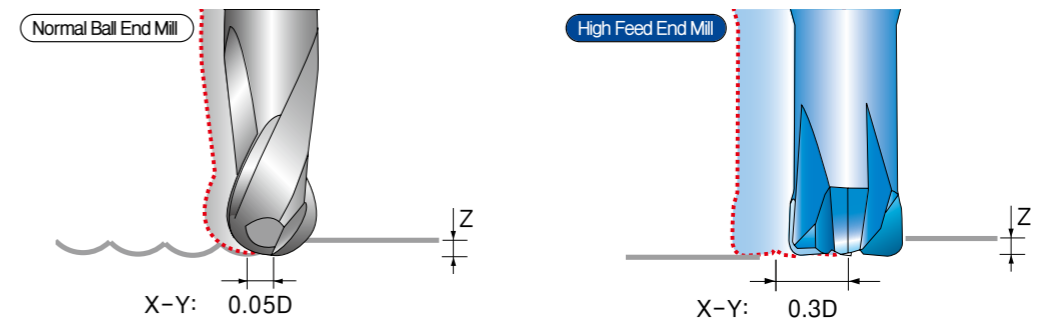


► More number of flutes than the normal 2F ball E/M results in high-feed cutting. For X - Y wide cutting pitch, high effective cutting performs in short tool working time.

(Example of performance : for the material HRc 50~55)

ITEM	SIZE	RPM	FEED	DEPTH OF CUT	
				Z(mm)	X-Y(mm)
HIGH FEED END MILL	4F Ø10 X R2	5,400	11,000	0.2	3.0
NORMAL BALL END MILL	2F Ø10 X R5	7,500	2,500	0.2	0.5

► For cutting on slopes and corners, the remaining part to be cut is smaller than one that remains after working with normal ball End Mill. It saves the time and cost

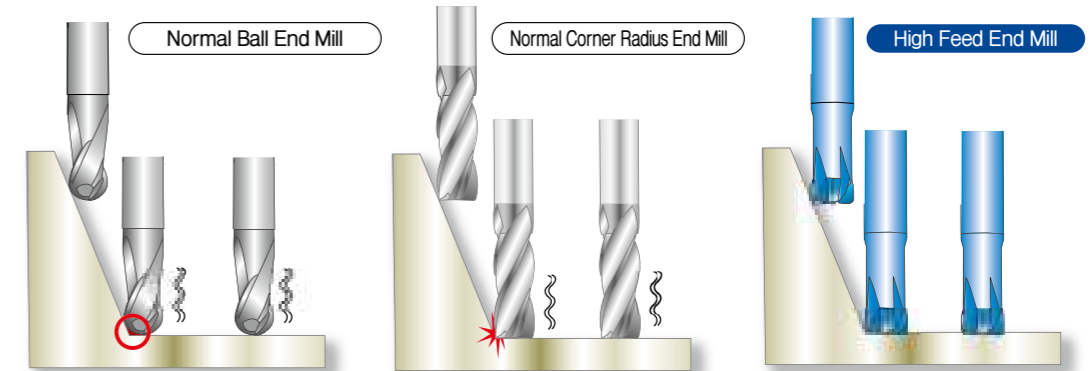

► By using straight flute, the rigidity of corner radius is improved. And it's also possible to get less damage to end teeth and radius than normal radius End Mill.

GUIDE LINE TO ICONS

Tool Raw Material

CARBIDE

Tolerance of Radius

R ±0.005 R ±0.010

Tolerance of Ball Radius

Type of Shank

PLAIN

Surface Treatment

BLUE

R ±0.005 R ±0.010 R ±0.015

Tolerance of Corner Radius

Cutting Condition pages

No. of Flutes

2 3 4 6 6&8

Helix Angle


30° 0° 30° 45°

BLUE-COATED SOLID CARBIDE END MILLS

4 FLUTE STUB LENGTH CORNER RADIUS HIGH FEED (Long Shank)

PLAIN SHANK **G8B54** SERIES


- ▶ Excellent wear resistance at heavy feed rates on high hardened material.
- ▶ Designed with reduced clearance angles and short flutes for strength.
- ▶ High hardness & heat resistance coating for long life in dry applications.

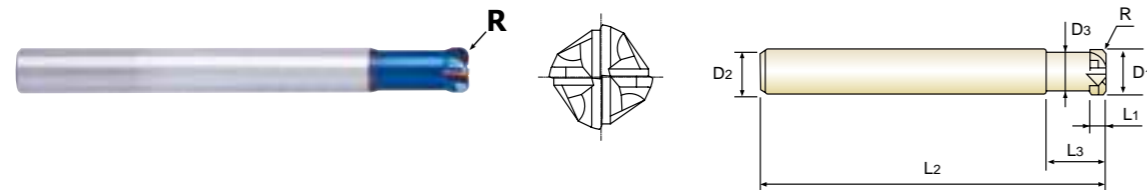

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8B5402005	R0.5	2.0	6	1	6	70	1.8
G8B5403005	R0.5	3.0	6	1.2	8	70	2.8
G8B5404005	R0.5	4.0	6	1.5	10	70	3.8
G8B5405005	R0.5	5.0	6	2	10	70	4.6
G8B5406005	R0.5	6.0	6	2.5	12	90	5.4
G8B5406010	R1.0	6.0	6	2.5	12	90	5.4
G8B5408010	R1.0	8.0	8	3.5	16	100	7.2
G8B5408020	R2.0	8.0	8	3.5	16	100	7.2
G8B5410010	R1.0	10.0	10	4	20	100	9
G8B5410020	R2.0	10.0	10	4	20	100	9
G8B5412020	R2.0	12.0	12	5	25	110	11
G8B5412030	R3.0	12.0	12	5	25	110	11
G8B5416030	R3.0	16.0	16	6.5	30	130	15

Mill Dia. Tolerance (mm)	Corner Radius Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.02	± 0.005	h5

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

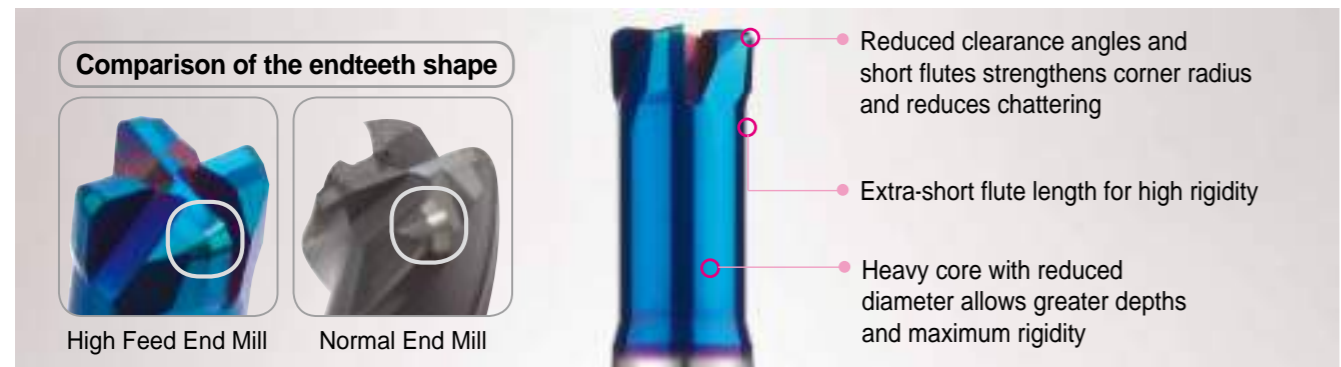


ISO Material Description	P										M					K																									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	13	25	28	32	38	42	48	52	58	62	68	72	78	82	88	92	98	102	108	112	118	122	128	132	138	142	148	152	158	162	168	172	178	182	188	192	198	202	208	212	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommend	○					○					○					○					○																				

BLUE-COATED SOLID CARBIDE END MILLS

2 FLUTE BALL NOSE for RIB PROCESSING

PLAIN SHANK **G8A46** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

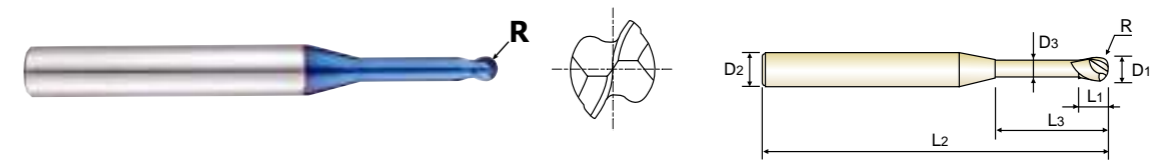

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A46805	R0.05	0.1	4	0.1	0.3	45	0.085
G8A46806	R0.05	0.1	4	0.1	0.5	45	0.085
G8A46002	R0.1	0.2	4	0.2	0.5	45	0.17
G8A46977	R0.1	0.2	4	0.2	1	45	0.17
G8A46958	R0.1	0.2	4	0.2	1.5	45	0.17
G8A46003	R0.15	0.3	4	0.3	1	45	0.27
G8A46959	R0.15	0.3	4	0.3	2	45	0.27
G8A46986	R0.15	0.3	4	0.3	3	45	0.27
G8A46004	R0.2	0.4	4	0.4	1	45	0.37
G8A46960	R0.2	0.4	4	0.4	2	45	0.37
G8A46961	R0.2	0.4	4	0.4	3	45	0.37
G8A46981	R0.2	0.4	4	0.4	4	45	0.37
G8A46987	R0.2	0.4	4	0.4	5	45	0.37
G8A46005	R0.25	0.5	4	0.4	2	45	0.45
G8A46804	R0.25	0.5	4	0.4	2.5	45	0.45
G8A46962	R0.25	0.5	4	0.4	4	45	0.45
G8A46963	R0.25	0.5	4	0.4	6	45	0.45
G8A46964	R0.25	0.5	4	0.4	8	45	0.45
G8A46957	R0.3	0.6	4	0.5	2	45	0.55
G8A46988	R0.3	0.6	4	0.5	3	45	0.55
G8A46915	R0.3	0.6	4	0.5	4	45	0.55
G8A46989	R0.3	0.6	4	0.5	5	45	0.55

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE


Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.012	h5

ISO Material Description	P										M					K																									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	13	25	28	32	38	42	48	52	58	62	68	72	78	82	88	92	98	102	108	112	118	122	128	132	138	142	148	152	158	162	168	172	178	182	188	192	198	202	208	212	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommend	○					○					○					○					○																				

**BLUE-COATED SOLID CARBIDE END MILLS
2 FLUTE STUB LENGTH BALL NOSE with EXTENDED NECK**

PLAIN SHANK **G8A38** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

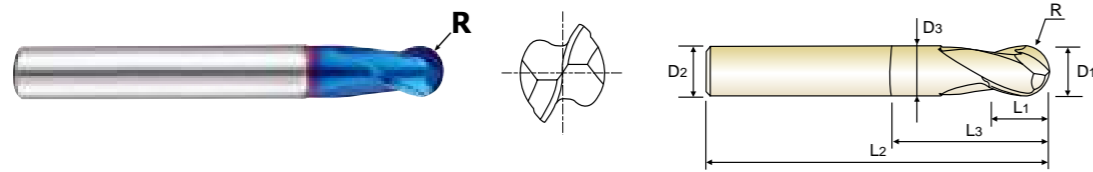

CARBIDE 2 BLUE 30° R ±0.005 ±0.010 PLAIN Unit Diagram Diagram P. 44-45

R0.5-R3 R3.5-R12.5

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A38010	R0.5	1.0	4	1	2.2	50	0.95
G8A38012	R0.6	1.2	4	1.2	2.6	50	1.15
G8A38015	R0.75	1.5	4	1.5	3	50	1.45
G8A380204S	R1.0	2.0	4	2	4	50	1.95
G8A38020	R1.0	2.0	6	2	4	50	1.95
G8A38030	R1.5	3.0	6	3	6	60	2.85
G8A38040	R2.0	4.0	6	4	8	70	3.85
G8A38050	R2.5	5.0	6	5	10	80	4.85
G8A38060	R3.0	6.0	6	6	12	90	5.85
G8A38070	R3.5	7.0	8	7	14	90	6.7
G8A38080	R4.0	8.0	8	8	16	100	7.7
G8A38090	R4.5	9.0	10	9	18	100	8.7
G8A38100	R5.0	10.0	10	10	20	100	9.7
G8A38120	R6.0	12.0	12	12	24	110	11.7
G8A38140	R7.0	14.0	14	14	28	110	13.7
G8A38160	R8.0	16.0	16	16	32	140	15.7
G8A38180	R9.0	18.0	18	18	36	140	17.7
G8A38200	R10.0	20.0	20	20	40	160	19.7
G8A38250	R12.5	25.0	25	25	50	180	24.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 -- - 0.012	h5
over R3	± 0.010	0 -- - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P										M						K			
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	15	23	10	26	3	25	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○		○							

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys		Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎		◎		◎	◎		◎			◎		◎	◎	◎		◎		◎	◎	◎

**BLUE-COATED SOLID CARBIDE END MILLS
2 FLUTE MINIATURE BALL NOSE**

PLAIN SHANK **G8A53** SERIES

- ▶ Applied center match type & special new design on ball center shape.
- ▶ Excellent high wear resistance and high performance.
- ▶ Applied for high speed and feed.
- ▶ Increased surface roughness.

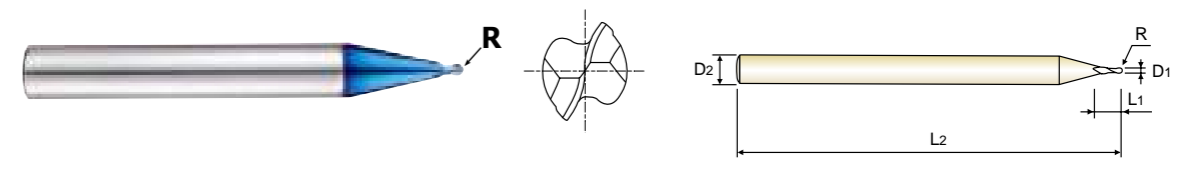

CARBIDE 2 BLUE 30° R ±0.005 PLAIN Unit Diagram Diagram P. 44-45

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.005)	D1	D2	L1	L2
G8A53004	R0.2	0.4	6	0.4	50
G8A53005	R0.25	0.5	6	0.5	50
G8A53006	R0.3	0.6	6	0.6	50
G8A53008	R0.4	0.8	6	0.8	50
G8A53010	R0.5	1.0	6	1.0	50
G8A53012	R0.6	1.2	6	1.2	50
G8A53015	R0.75	1.5	6	1.5	50
G8A53020	R1.0	2.0	6	2.0	50

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 -- - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M						K			
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	15	23	10	26	3	25	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○		○							

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys		Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎		◎		◎	◎		◎			◎		◎	◎	◎		◎		◎	◎	◎

BLUE-COATED SOLID CARBIDE END MILLS 3 FLUTE BALL NOSE - Center Match

PLAIN SHANK **G8A59** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

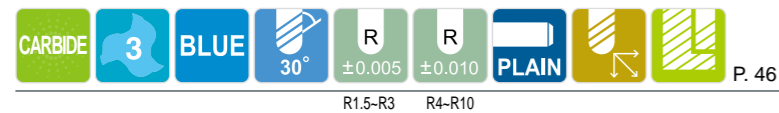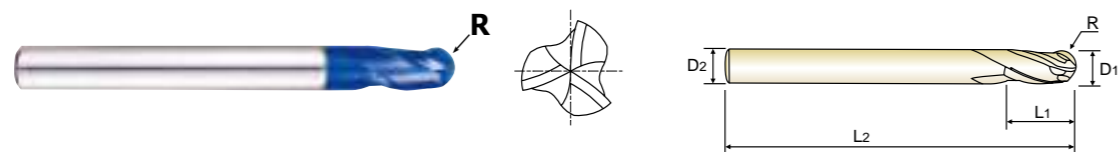

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8A59030	R1.5	3.0	6	8	60
G8A59040	R2.0	4.0	6	8	70
G8A59050	R2.5	5.0	6	10	80
G8A59060	R3.0	6.0	6	12	90
G8A59080	R4.0	8.0	8	14	100
G8A59100	R5.0	10.0	10	18	100
G8A59120	R6.0	12.0	12	22	110
G8A59160	R8.0	16.0	16	30	140
G8A59200	R10.0	20.0	20	38	160

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	45	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○			○						

ISO Material Description	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○				○					○			○			○					

BLUE-COATED SOLID CARBIDE END MILLS 4 FLUTE BALL NOSE - Center Match

PLAIN SHANK **G8D62** SERIES

- ▶ Applied center match type & special new design on ball center shape.
- ▶ Excellent high wear resistance and high performance.
- ▶ Applied for high speed and feed.
- ▶ Increased surface roughness.

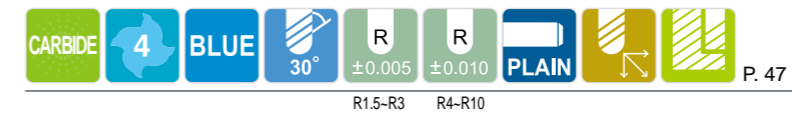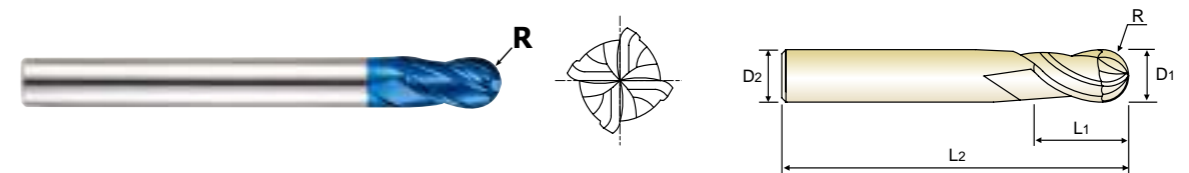

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8D62030	R1.5	3.0	6	8	60
G8D62040	R2.0	4.0	6	8	70
G8D62050	R2.5	5.0	6	10	80
G8D62060	R3.0	6.0	6	12	90
G8D62080	R4.0	8.0	8	14	100
G8D62100	R5.0	10.0	10	18	100
G8D62120	R6.0	12.0	12	22	110
G8D62160	R8.0	16.0	16	30	140
G8D62200	R10.0	20.0	20	38	160

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	45	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○			○						

ISO Material Description	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○				○					○			○			○					


BLUE-COATED SOLID CARBIDE END MILLS

2 FLUTE STUB LENGTH CORNER RADIUS with EXTENDED NECK

PLAIN SHANK

G8A36 SERIES

- Designed to machine high hardened materials.
- Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- Excellent workpiece finish.
- Deep slotting is possible due to the reduced neck.
- Corner radius for preventing chipping in high speed machining.
- Higher wear-resistance.

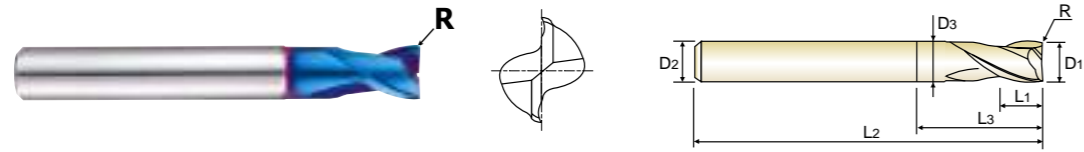

CARBIDE 2 BLUE 30° ±0.010 ±0.015 PLAIN P. 55-57

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A36040	R0.1	4.0	6	5	9	45	3.85
G8A36045	R0.1	4.5	6	6	10	45	4.35
G8A36050	R0.2	5.0	6	6	11	50	4.85
G8A36060	R0.2	6.0	6	7	14	50	5.85
G8A36080	R0.2	8.0	8	9	18	60	7.7
G8A36100	R0.2	10.0	10	12	25	75	9.7
G8A36120	R0.3	12.0	12	15	30	75	11.7
G8A36160	R0.3	16.0	16	18	38	90	15.7
G8A36200	R0.3	20.0	20	24	45	100	19.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	15	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○	○			○					

ISO Material Description	N				S						H										
	Aluminum-wrought alloy	Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎


BLUE-COATED SOLID CARBIDE END MILLS

2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK

G8A52 SERIES

- Designed to machine high hardened materials.
- Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- Excellent workpiece finish.
- Deep slotting is possible due to the reduced neck.
- Corner radius for preventing chipping in high speed machining.
- Higher wear-resistance.

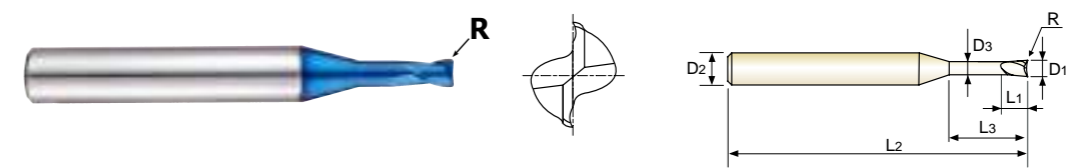

CARBIDE 2 BLUE 30° ±0.010 PLAIN P. 50

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.010)	D1	D2	L1	L3	L2	D3
G8A52005	R0.05	0.5	6	0.7	1.5	50	0.45
G8A52901	R0.05	0.5	6	0.7	3.3	50	0.45
G8A52006	R0.05	0.6	6	0.9	2	50	0.55
G8A52902	R0.05	0.6	6	0.9	4	50	0.55
G8A52008	R0.05	0.8	6	1.2	2.5	50	0.75
G8A52903	R0.05	0.8	6	1.2	5.5	50	0.75
G8A52010	R0.10	1.0	6	1.5	3.3	50	0.95
G8A52904	R0.10	1.0	6	1.5	6.7	50	0.95
G8A52012	R0.10	1.2	6	1.8	4.4	50	1.15
G8A52905	R0.10	1.2	6	1.8	8	50	1.15
G8A52015	R0.15	1.5	6	2.2	5	50	1.45
G8A52906	R0.15	1.5	6	2.2	9.7	50	1.45
G8A52020	R0.15	2.0	6	2.2	6	50	1.95
G8A52907	R0.15	2.0	6	2.2	13	50	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	15	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○	○			○					

ISO Material Description	N				S						H										
	Aluminum-wrought alloy	Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE for RIB PROCESSING

PLAIN SHANK **G8A45** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

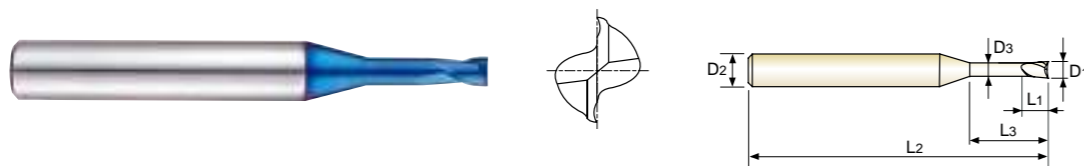

P. 53-54

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G8A45991	0.6	4	0.9	4	45	0.55
G8A45992	0.6	4	0.9	6	45	0.55
G8A45993	0.6	4	0.9	8	45	0.55
G8A45819	0.6	4	0.9	10	45	0.55
G8A45862	0.8	4	1.2	2	45	0.75
G8A45008	0.8	4	1.2	4	45	0.75
G8A45908	0.8	4	1.2	6	45	0.75
G8A45909	0.8	4	1.2	8	45	0.75
G8A45994	0.8	4	1.2	10	45	0.75
G8A45995	0.8	4	1.2	12	45	0.75
G8A45996	1.0	4	1.5	4	45	0.95
G8A45010	1.0	4	1.5	6	45	0.95
G8A45912	1.0	4	1.5	8	45	0.95
G8A45913	1.0	4	1.5	10	45	0.95
G8A45914	1.0	4	1.5	12	45	0.95
G8A45997	1.0	4	1.5	16	50	0.95
G8A45998	1.0	4	1.5	20	55	0.95
G8A45012	1.2	4	1.8	6	45	1.15
G8A45915	1.2	4	1.8	8	45	1.15
G8A45916	1.2	4	1.8	10	45	1.15
G8A45917	1.2	4	1.8	12	45	1.15
G8A45999	1.2	4	1.8	16	50	1.15

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P											M			K						
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										

ISO Material Description	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE for RIB PROCESSING

PLAIN SHANK **G8A45** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

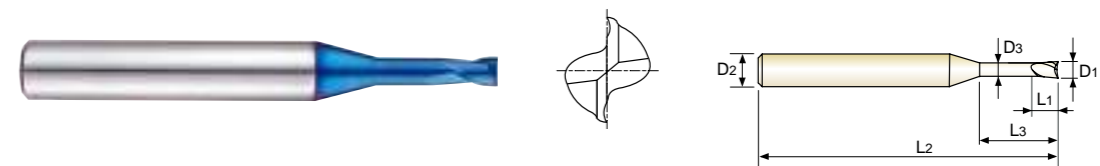

P. 53-54

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G8A45015	1.5	4	2.3	6	45	1.45
G8A45923	1.5	4	2.3	8	45	1.45
G8A45924	1.5	4	2.3	10	45	1.45
G8A45925	1.5	4	2.3	12	45	1.45
G8A45926	1.5	4	2.3	14	50	1.45
G8A45927	1.5	4	2.3	16	50	1.45
G8A45928	1.5	4	2.3	18	55	1.45
G8A45810	1.5	4	2.3	20	55	1.45
G8A45958	2.0	4	3.0	6	45	1.95
G8A45020	2.0	4	3.0	8	45	1.95
G8A45959	2.0	4	3.0	10	45	1.95
G8A45960	2.0	4	3.0	12	45	1.95
G8A45961	2.0	4	3.0	14	50	1.95
G8A45962	2.0	4	3.0	16	50	1.95
G8A45963	2.0	4	3.0	18	55	1.95
G8A45964	2.0	4	3.0	20	55	1.95
G8A45966	2.0	4	3.0	25	60	1.95
G8A45814	2.0	4	3.0	30	70	1.95
G8A45975	3.0	6	4.5	10	45	2.85
G8A45976	3.0	6	4.5	12	45	2.85
G8A45977	3.0	6	4.5	14	50	2.85
G8A45978	3.0	6	4.5	16	55	2.85

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P											M			K						
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										

ISO Material Description	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

BLUE-COATED SOLID CARBIDE END MILLS
2 FLUTE for RIB PROCESSING

PLAIN SHANK **G8A45** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

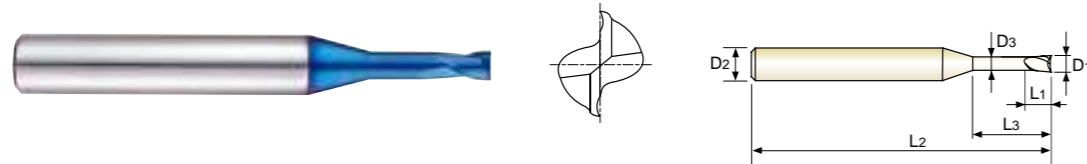

P. 53-54

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G8A45979	3.0	6	4.5	18	55	2.85
G8A45980	3.0	6	4.5	20	60	2.85
G8A45981	3.0	6	4.5	25	65	2.85
G8A45832	3.0	6	4.5	30	70	2.85
G8A45833	3.0	6	4.5	35	80	2.85
G8A45983	3.0	6	4.5	40	90	2.85
G8A45040	4.0	6	6	12	50	3.85
G8A45801	4.0	6	6	16	60	3.85
G8A45802	4.0	6	6	20	60	3.85
G8A45803	4.0	6	6	25	70	3.85
G8A45834	4.0	6	6	30	70	3.85
G8A45835	4.0	6	6	35	80	3.85
G8A45836	4.0	6	6	40	90	3.85
G8A45837	4.0	6	6	45	90	3.85
G8A45838	4.0	6	6	50	100	3.85

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M					K																													
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
HRc	13	25	28	32	35	38	42	45	48	52	55	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																									
Recommend	○					○					○					○					○					○																			

BLUE-COATED SOLID CARBIDE END MILLS
2 FLUTE with EXTENDED NECK

PLAIN SHANK **G8A01** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

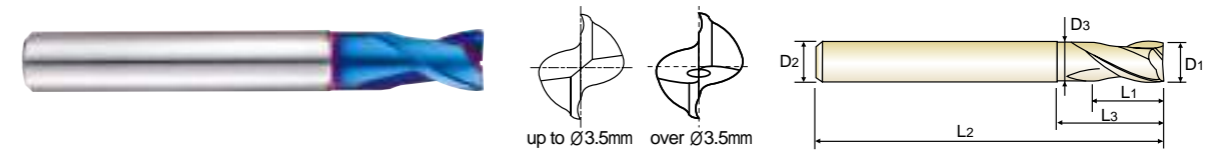

P. 55-57

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G8A01001	0.1	4	0.2	-	40	-
G8A01002	0.2	4	0.4	-	40	-
G8A01003	0.3	4	0.6	-	40	-
G8A01004	0.4	4	0.8	-	40	-
G8A01005	0.5	4	1	-	40	-
G8A01006	0.6	4	1.2	-	40	-
G8A01007	0.7	4	1.4	-	40	-
G8A01008	0.8	4	1.6	-	40	-
G8A01009	0.9	4	2	-	40	-
G8A010104S	1.0	4	1.5	3	50	0.95
G8A01010	1.0	6	1.5	3	50	0.95
G8A010154S	1.5	4	1.7	4	50	1.45
G8A01015	1.5	6	1.7	4	50	1.45
G8A010204S	2.0	4	2	5	50	1.95
G8A01020	2.0	6	2	5	50	1.95
G8A010254S	2.5	4	2.5	6	55	2.4
G8A01025	2.5	6	2.5	6	55	2.4
G8A01030	3.0	6	3	8	55	2.85
G8A01035	3.5	6	3.5	9	55	3.35
G8A01040	4.0	6	4	10	55	3.85
G8A01050	5.0	6	5	13	55	4.85
G8A01060	6.0	6	6	15	55	5.85
G8A01080	8.0	8	8	20	65	7.7
G8A01100	10.0	10	10	25	75	9.7
G8A01120	12.0	12	12	28	85	11.7
G8A01160	16.0	16	16	32	90	15.7
G8A01200	20.0	20	20	40	105	19.7

Unit : mm

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0 ~ - 0.012	h5
over Ø6	0 ~ - 0.015	

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.


◎ : Excellent ○ : Good

ISO Material Description	P										M					K																													
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
HRc	13	25	28	32	35	38	42	45	48	52	55	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																									
Recommend	○					○					○					○					○					○																			

BLUE-COATED SOLID CARBIDE END MILLS 4 FLUTE with EXTENDED NECK

PLAIN SHANK **G8A02** SERIES

- Designed to machine high hardened materials.
- Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- Excellent workpiece finish.
- Deep slotting is possible due to the reduced neck.
- Corner radius for preventing chipping in high speed machining.
- Higher wear-resistance.

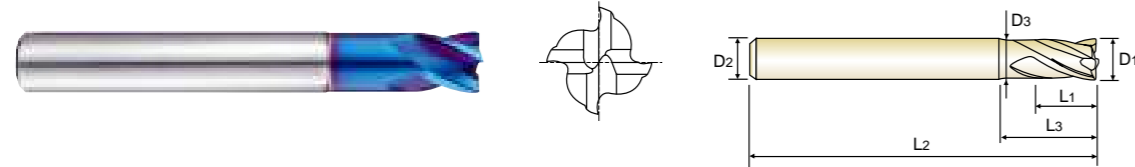

P. 58

Unit : mm

EDP No.	Mill Diameter		Shank Diameter		Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	D2	D2	L1	L3	L2	D3
G8A02010	1.0	6	6	6	1.5	3	50	0.95
G8A02020	2.0	6	6	6	2	5	50	1.95
G8A02030	3.0	6	6	6	3	8	55	2.85
G8A02040	4.0	6	6	6	4	10	55	3.85
G8A02050	5.0	6	6	6	5	13	55	4.85
G8A02060	6.0	6	6	6	6	15	55	5.85
G8A02080	8.0	8	8	8	8	20	65	7.7
G8A02100	10.0	10	10	10	10	25	75	9.7
G8A02120	12.0	12	12	12	12	28	85	11.7
G8A02160	16.0	16	16	16	16	32	90	15.7
G8A02200	20.0	20	20	20	20	40	105	19.7



Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0 ~ - 0.012	h5
over Ø6	0 ~ - 0.015	

BLUE-COATED SOLID CARBIDE END MILLS 6&8 FLUTE 45° HELIX LONG LENGTH

PLAIN SHANK **G8D63** SERIES

- Designed to machine high hardened materials.
- Designed for high abrasion resistance thanks to negative rake angle.
- Excellent side-cutting of press mold field.

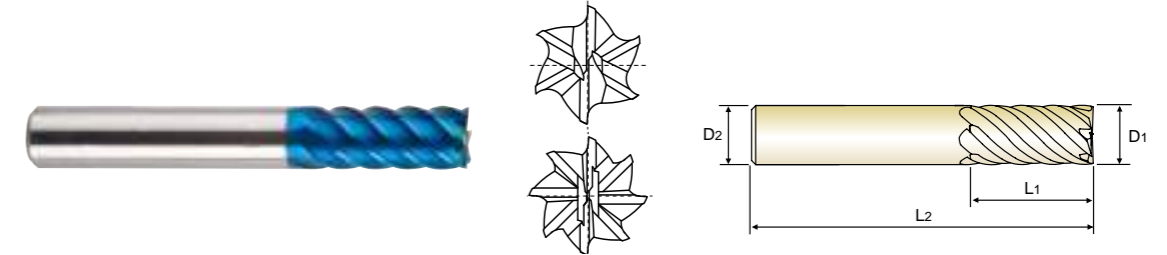


P. 60

Unit : mm

EDP No.	Mill Diameter		Shank Diameter		Length of Cut	Overall Length	No. of Flute
	D1	D2	D2	D2	L1	L2	
G8D63060	6.0	6	6	6	13	57	6
G8D63080	8.0	8	8	8	19	63	6
G8D63100	10.0	10	10	10	22	72	6
G8D63120	12.0	12	12	12	26	83	6
G8D63140	14.0	14	14	14	26	83	6
G8D63160	16.0	16	16	16	32	92	6
G8D63180	18.0	18	18	18	32	92	8
G8D63200	20.0	20	20	20	38	104	8
G8D63250	25.0	25	25	25	44	104	8

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

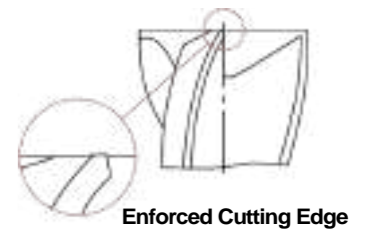

◎ : Excellent ○ : Good

ISO Material Description	P										M				K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommend	○					○					○		○		○		○		○		○			
ISO Material Description	N					S					H													
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRC											15	30	25	38	34	36	37	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
Recommend	○					○					○				◎		◎		○		◎		◎	

◎ : Excellent ○ : Good


ISO Material Description	P										M				K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommend	○					○					○		○		○		○		○		○			
ISO Material Description	N					S					H													
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRC											15	30	25	38	34	36	37	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
Recommend	○					○					○				◎		◎		○		◎		◎	

G8A46, G8A54 SERIES 2 FLUTE BALL NOSE FOR RIB PROCESSING

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.
 Ap = mm

ISO	VDI 3323	Material Description	Parameter	Diameter (∅)				
				0.2	0.3	0.4	0.5	0.6
P	5	Non-alloy steel	Vc	31	45~47	60~63	50~55	50~56
			fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015
			RPM	50000	48000~50000	48000~50000	31900~35200	26400~29700
	8-9	Low alloy steel	FEED	265~310	440~460	450~550	450~540	440~540
			Ap	0.006~0.016	0.010~0.017	0.013~0.032	0.007~0.028	0.007~0.034
			Vc	31	45~47	60~63	54~78	54~77
	11.1 - 11.2	High alloyed steel and tool steel	fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015
			RPM	50000	48000~50000	48000~50000	34100~49500	28600~40700
			FEED	300~350	480~520	720~790	600~870	590~850
H	38.1 - 38.2	Hardened steel	Ap	0.006~0.016	0.010~0.017	0.013~0.032	0.007~0.028	0.007~0.034
			Vc	31	45~47	60~63	50~55	50~56
			fz	0.003~0.003	0.004~0.005	0.005~0.006	0.006~0.008	0.007~0.010
	39.1	Hardened steel	RPM	50000	48000~50000	48000~50000	31900~35200	26400~29700
			FEED	265~310	440~460	450~550	450~540	440~540
			Ap	0.005~0.013	0.008~0.014	0.011~0.026	0.005~0.023	0.006~0.028
	39.2	Hardened steel	Vc	31	43~47	58~63	50~55	50~56
			fz	0.009~0.011	0.017~0.017	0.017~0.018	0.028~0.027	0.030~0.032
			RPM	50000	46000~50000	46000~50000	31900~35200	26400~29700
40	Chilled Cast Iron	FEED	225~265	390~420	400~460	440~480	400~480	
		Ap	0.005~0.012	0.007~0.013	0.010~0.024	0.005~0.021	0.006~0.025	
		Vc	31	43~47	58~63	50~55	50~56	
41	Hardened Cast Iron	fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015	
		RPM	50000	48000~50000	48000~50000	34100~49500	28600~40700	
		FEED	265~310	440~460	450~550	450~540	440~540	
41	Hardened Cast Iron	Ap	0.005~0.013	0.008~0.014	0.011~0.026	0.005~0.023	0.006~0.028	


▶ NEXT PAGE




G8A46, G8A54 SERIES 2 FLUTE BALL NOSE FOR RIB PROCESSING

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.
 Ap = mm

VDI 3323	Parameter	Diameter (∅)						
		0.8	1.0	1.2	1.5	2.0	3.0	4.0
5	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3950~4400
	FEED	460~550	470~540	460~540	440~540	470~530	590~650	550~620
8-9	Ap	0.016~0.064	0.008~0.080	0.024~0.032	0.031~0.048	0.024~0.160	0.064~0.240	0.080~0.320
	Vc	55~77	55~76	54~70	52~67	53~69	54~77	54~78
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	22000~30800	17600~24200	14300~18700	11000~14300	8500~11000	5700~8200	4300~6200
11.1 - 11.2	FEED	640~890	600~850	590~780	580~760	590~800	730~1000	680~990
	Ap	0.016~0.064	0.008~0.080	0.024~0.032	0.031~0.048	0.024~0.160	0.064~0.240	0.080~0.320
	Vc	55~77	55~76	54~70	52~67	53~69	54~77	54~78
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
38.1 - 38.2	RPM	22000~30800	17600~24200	14300~18700	11000~14300	8500~11000	5700~8200	4300~6200
	FEED	640~890	600~850	590~780	580~760	590~800	730~1000	680~990
	Ap	0.016~0.064	0.008~0.080	0.024~0.032	0.031~0.048	0.024~0.160	0.064~0.240	0.080~0.320
	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
39.1	fz	0.010~0.014	0.013~0.018	0.016~0.023	0.019~0.027	0.027~0.034	0.051~0.061	0.063~0.078
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3950~4400
	FEED	460~550	470~540	460~540	440~540	470~530	590~650	550~620
	Ap	0.013~0.052	0.007~0.065	0.020~0.026	0.025~0.039	0.020~0.130	0.052~0.195	0.065~0.260
39.2	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.044~0.045	0.057~0.057	0.070~0.069	0.084~0.083	0.111~0.109	0.208~0.214	0.275~0.259
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3850~4400
	FEED	440~500	440~500	420~480	420~480	440~480	550~620	530~570
40	Ap	0.012~0.048	0.006~0.060	0.018~0.024	0.023~0.036	0.018~0.120	0.048~0.120	0.060~0.240
	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	22000~30800	17600~24200	14300~18700	11000~14300	8500~11000	5700~8200	4300~6200
41	FEED	640~890	600~850	590~780	580~760	590~800	730~1000	680~990
	Ap	0.016~0.064	0.008~0.080	0.024~0.032	0.031~0.048	0.024~0.160	0.064~0.240	0.080~0.320
	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.010~0.014	0.013~0.018	0.016~0.023	0.019~0.027	0.027~0.034	0.051~0.061	0.063~0.078
41	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3950~4400
	FEED	460~550	470~540	460~540	440~540	470~530	590~650	550~620
	Ap	0.013~0.052	0.007~0.065	0.020~0.026	0.025~0.039	0.020~0.130	0.052~0.195	0.065~0.260





HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TURKEY
CZECH REPUBLIC	GERMANY	NORWAY	RUSSIA	SWEDEN	UNITED KINGDOM
DENMARK	HUNGARY	POLAND	SERBIA	SWITZERLAND	

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SINGAPORE	UNITED ARAB EMIRATES
CHINA	ISRAEL	PAKISTAN	SOUTH KOREA	VIETNAM
HONG KONG	JAPAN	PHILIPPINES	TAIWAN	
INDIA	KINGDOM OF SAUDI ARABIA	THAILAND		

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------