

YE-HT20
EUROPE
2020/2021



CUTTING TOOLS




HOLEMAKING

 YG-1 CO., LTD.

GUIDE LINE TO ICONS

Standard of Tools



YG-1 Standard




Number of
DIN Standard

Tool Material




Carbide




YG-1 Premium
Powder Metallurgy HSS




Super HSS



8% Cobalt HSS




5% Cobalt HSS




High Speed Steel


Surface Treatment




Titanium Carbon
Nitride Coating




Titanium Nitride Coating




Titanium Aluminum
Nitride Coating




TiAlN + WC/C Coating




YG-1 X-Coating




YG-1 H-Coating



Diamond Coating




Steam Tempered
(Black Oxide finish)




Bright Finish

The Type of Shank




Flat shank
with DIN Standard




Range of
Morse Taper Shank

Coolant Supply Pressure



Internal Coolant Supply
at 45 bar average pressure



Internal Coolant Supply
at 20 bar average pressure

Helix Angle



30° 20~30° ≈ 30°

Point Angle



120° 135° 140°


Chamfer Angle




15° 45°

Reamers


Tolerance of Dimension




m7
Tolerance of Outside Diameter



h8




h7
Tolerance of Shank Diameter



h8

O.D. Tolerance of Reamer



H7
DIN 1420 for H7
Reamed Hole

Cutting Condition



Drills



Reamers





Countersinks



Counterbores





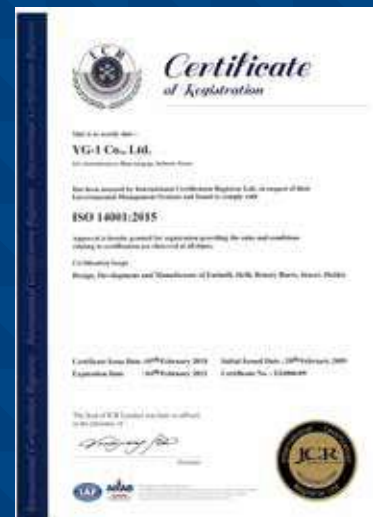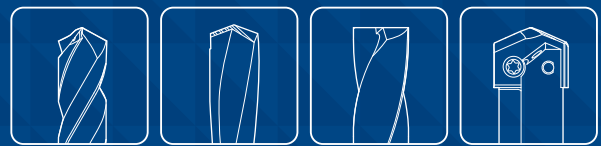







CUTTING TOOLS



HOLEMAKING TOOLS

1. ENGLISH 2.GERMAN 3.FRENCH 4. ITALIAN 5. SPANISH 6. RUSSIAN 7. POLISH 8. TURKISH

PRODUCTS	DESCRIPTION	PAGE
 <p>1 i-ONE DRILLS, CARBIDE INSERTS & HOLDERS 2 i-One DRILLS, VHM auswechselbare Bohrschneiden 3 i-ONE DRILLS, PLAQUETTE CARBURE DE PERÇAGE 4 PUNTE i-ONE DRILLS 5 i-one Drills con inserto de carburo 6 Сверла i-ONE с твердосплавными сменными пластинами 7 Wiertła i-ONE na wymienne płytki węglkowe 8 i-ONE DRILLS, DEĞİŞTİRİLEBİLİR KARBÜR UÇLU MATKAPLAR</p>	High Performance Exchangeable for General Steels and Cast Iron	35
 <p>1 i-DREAM DRILLS, CARBIDE INSERTS & HOLDERS 2 i-DREAM DRILLS, HM-Wechselplatten 3 i-DREAM DRILLS - PLAQUETTES CARBURE 4 INSERTI i-DREAM DRILL 5 Brocas i-dream, inserto de metal duro 6 Сверла i-DREAM с твердосплавными сменными пластинами 7 WIERTŁA i-DREAM DRILL, PŁYTKI WĘGLKOWE 8 i-DREAM DRILL, DEĞİŞTİRİLEBİLİR KARBÜR UÇLU MATKAPLAR</p>	For General Steels and Stainless Steels	53
 <p>1 SOLID CARBIDE DREAM DRILLS - GENERAL (with & without coolant Holes) 2 VHM-DREAM DRILLS-UNIVERSAL (mit und ohne Kühlkanäle) 3 DREAM DRILLS - FORETS CARBURE Général (avec et sans arrosage central) 4 PUNTE DREAM DRILLS (con e senza fori di refrigerazione) 5 Brocas Dream de metal duro- General (con y sin agujeros de refrigeración) 6 Твердосплавные сверла DREAM DRILLS - GENERAL общего применения (с/без отверстий для СОЖ) 7 WIERTŁA WĘGLKOWE DREAM DRILL - DO OGÓLNEGO ZASTOSOWANIA (Z CHŁODZENIEM LUB BEZ CHŁODZENIA WEWNĘTRZNYM) 8 SOLID KARBÜR DREAM DRILL MATKAPLAR-GENEL KULLANIM (İçten su delikli ve su deliksiz)</p>	For General Purpose (HRC30 to HRC45)	75
 <p>1 SOLID CARBIDE DREAM DRILLS - HIGH FEED (with coolant holes) 2 VHM Dream Drills - High Feed mit innerer Kühlmittelzufuhr (IK) 3 DREAM DRILLS Grande Avance, FORETS CARBURE MONOBLOC (avec arrosage central) 4 PUNTE DREAM DRILLS AD ELEVATO AVANZAMENTO (Con fori di refrigerazione) 5 Dream Drills de carburo sólido, de alto avance con agujeros de refrigeración 6 ТВЕРДОСПЛАВНЫЕ СВЕРЛА DREAM DRILLS - HIGH FEED ДЛЯ ВЫСОКОЙ ПОДАЧИ (с отверстиями для СОЖ) 7 Wiertła węglkowe Dream Drill – High Feed (z chłodzeniem wewnętrznym) 8 SOLID KARBÜR DREAM DRILL MATKAPLAR -YÜKSEK İLERLEMELİ MATKAPLAR (İçten su delikli)</p>	1.5 to 2 Times Faster Feeding Speed than 2-Flute Drill for Carbon Steels, Alloy Steels (up to HRC35) and Cast Iron	99
 <p>1 SOLID CARBIDE DREAM DRILLS - FLAT BOTTOM (with & without coolant Holes) 2 VHM Dream Drills - Flachbohrer 3 DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC 4 PUNTE DREAM DRILLS FLAT BOTTOM 5 Dream Drills de carburo sólido - Flat Bottom 6 ТВЕРДОСПЛАВНЫЕ СВЕРЛА DREAM DRILLS С ПЛОСКИМ ТОРЦЕМ 7 Wiertła węglkowe Dream Drill – płaskie dno 8 SOLID KARBÜR DREAM DRILL MATKAPLAR -DÜZ AĞIZLI</p>	For Holes on Various Angled Surfaces	107
 <p>1 SOLID CARBIDE DREAM DRILLS - INOX (with coolant Holes) 2 VHM - DREAM DRILLS - INOX (mit Kühlkanälen) 3 DREAM DRILLS - FORETS CARBURE Spécial INOX (avec arrosage central) 4 PUNTE DREAM DRILLS PER INOX (con fori di refrigerazione) 5 Brocas de metal duro- Inox (con agujeros de refrigeración) 6 Твердосплавные сверла DREAM DRILLS - INOX для нержавеющей стали, никелевых сплавов, титана (с отверстиями для СОЖ) 7 WIERTŁA WĘGLKOWE DREAM DRILL- INOX (Z CHŁODZENIEM WEWNĘTRZNYM) 8 SOLID KARBÜR DREAM DRILL PASLANMAZ ÇELİK MATKAPLARI (İçten su delikli)</p>	For Tough Materials like Stainless Steels, Nickel Alloys and Titanium	119
 <p>1 SOLID CARBIDE DREAM DRILLS - ALU (with coolant Holes) 2 VHM - DREAM DRILLS - ALU (mit Kühlkanälen) 3 DREAM DRILLS - FORETS CARBURE Spécial ALU (avec arrosage central) 4 PUNTE DREAM DRILLS ALU (con fori di refrigerazione) 5 Brocas de metal duro- ALU(con agujeros de refrigeración) 6 Твердосплавные сверла DREAM DRILLS - ALU для алюминия (с отверстиями для СОЖ) 7 WIERTŁA WĘGLKOWE DREAM DRILL - ALU (Z CHŁODZENIEM WEWNĘTRZNYM) 8 SOLID KARBÜR DREAM DRILL ALUMINYUM MATKAPLARI (İçten su delikli)</p>	For Aluminum and Aluminum Alloys	131
 <p>1 SOLID CARBIDE DREAM DRILLS - CFRP (without coolant Holes) 2 VHM - DREAM DRILLS - CFK 3 DREAM DRILLS - FORETS CARBURE Spécial CFRP 4 PUNTE DREAM DRILLS CFRP 5 Brocas de metal duro- CFRP 6 Твердосплавные сверла DREAM DRILLS - CFRP для композитных материалов 7 WIERTŁA WĘGLKOWE DREAM DRILL - CFRP 8 SOLID KARBÜR DREAM DRILL CRFP - KOMPOZİT MATKAPLARI</p>	For Composite Materials including CFRP and GFRP	143
 <p>1 SOLID CARBIDE DREAM DRILLS - MQL TYPE (with coolant Holes) 2 VHM - DREAM DRILLS - MQL (mit Kühlkanälen) 3 DREAM DRILLS - FORETS CARBURE - Type MQL (avec arrosage central) 4 PUNTE DREAM DRILL MQL (con fori per refrigerazione) 5 Brocas Dream de metal duro- Tipo MQL(con agujeros de refrigeración) 6 Твердосплавные сверла DREAM DRILLS - MQL для глубокого сверления (с отверстиями для СОЖ) 7 WIERTŁA WĘGLKOWE DREAM DRILL - TYP MQL (Z CHŁODZENIEM WEWNĘTRZNYM) 8 SOLID KARBÜR DREAM DRILL MQL MATKAPLAR (İçten su delikli)</p>	Minimum Quantity Lubrication Drilling Deep Holes (10xD - 30xD)	147
 <p>1 SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS (without coolant Holes) 2 VHM - DREAM DRILLS FÜR HOCHGEHÄRTETE STÄHLE 3 DREAM DRILLS - FORETS CARBURE pour ACIERS DURS 4 PUNTE DREAM DRILLS PER ACCIAI TEMPRATI 5 Brocas Dream de metal duro para aceros templados 6 Твердосплавные сверла DREAM DRILLS для закалённой стали 7 WIERTŁA WĘGLKOWE DREAM DRILL DO STALI UTWARDANYCH 8 SOLID KARBÜR DREAM DRILL SETLEŞTİRİLMİŞ ÇELİK MATKAPLARI</p>	For High Hardened Steels (HRC50 to HRC70)	157




HOLEMAKING TOOLS

1. ENGLISH 2.GERMAN 3.FRENCH 4. ITALIAN 5. SPANISH 6. RUSSIAN 7. POLISH 8. TURKISH

PRODUCTS	DESCRIPTION	PAGE
 <p>1 GENERAL SOLID CARBIDE DRILLS (JOBBER & STUB LENGTH) 2 UNIVERSELLE VHM - BOHRER (in Längen nach DIN 338 und DIN 1897) 3 FORETS CARBURE à usage général- SERIE COURTE 4 PUNTE GENERICHE CORTE ED EXTRA CORTE 5 Brocas de metal duro, longitud extra corta, estándar 6 Твердосплавные сверла общего применения, обычной длины и укороченные 7 WIERTŁA WĘGLKOWE DO OGÓLNEGO ZASTOSOWANIA 8 NORMAL ve KISA BOY KARBÜR GENEL KULLANIM MATKAPLARI</p>	For General Purpose, DIN338 & DIN6539	161
 <p>1 HSS-PM MULTI-1 DRILLS 2 HSS-PM MULTI-1 BOHRER 3 MULTI-1 DRILLS - FORETS HSS-PM 4 PUNTE MULTI-1 DRILLS 5 Brocas HSS sinterizado Multi-1 6 Сверла MULTI-1 из порошковой быстрорежущей стали 7 WIERTŁA MULTI-1 HSS-PM 8 HSS-PM MULTI-1 MATKAPLAR</p>	Premium HSS-PM Drills For Wide Range of Applications Particularly Stainless Steels and Titanium	169
 <p>1 HSSCo8 & HSS-E HPD STRAIGHT SHANK DRILLS 2 PREMIUM-HSS HPD ZYLINDERSCHAFT BOHRER 3 FORETS HSS-PM Haute Performance cylindriques 4 PUNTE HPD GAMBO CILINDRICO 5 Brocas HSS Co HPD mango cilíndrico 6 Сверла HPD с цилиндрическим хвостовиком из улучшенной быстрорежущей стали 7 WIERTŁA PROSTE PREMIUM HSS DO OBRÓBKİ PRECYZYJNEJ 8 PREMIUM HSS SİLİNDİRİK ŞAFTLI YÜKSEK PERFORMANS MATKAPLARI</p>	High Precision Drilling for General Steels & Stainless Steels	179
 <p>1 HSS & HSS-E GOLD-P DRILLS 2 HSS GOLD-P BOHRER 3 GOLD-P, FORETS HSS 4 PUNTE GOLD-P DRILLS 5 Brocas Acero rápido Gold-P 6 Сверла GOLD-P из быстрорежущей стали 7 WIERTŁA GOLD-P HSS 8 HSS GOLD-P MATKAPLAR</p>	Same Performance as Full TiN-coated Drills	203
 <p>1 SUPER HSS SUPER-GP DRILLS 2 HSS BOHRER MIT ZYLINDERSCHAFT 3 FORETS HSS Cylindriques 4 PUNTE SUPER GP-DRILLS 5 Brocas HSS mango cilíndrico 6 Сверла SUPER-GP DRILLS из супер быстрорежущей стали 7 WIERTŁA Z CHWYTEM PROSTYM HSS 8 HSS SUPER-GP SİLİNDİRİK DÜZ ŞAFTLI MATKAPLAR</p>	All Applications Regardless of Machining Conditions; Good or Poor	221
 <p>1 HSS, HSS-E & HSSCo8 STRAIGHT SHANK DRILLS 2 HSS BOHRER MIT ZYLINDERSCHAFT 3 FORETS HSS Cylindriques 4 PUNTE HSS GAMBO CILINDRICO 5 Brocas HSS mango cilíndrico 6 Сверла из быстрорежущей стали с цилиндрическим хвостовиком 7 WIERTŁA Z CHWYTEM PROSTYM HSS 8 HSS SİLİNDİRİK DÜZ ŞAFTLI MATKAPLAR</p>	For General Purpose (Soft & Tough Materials)	229
 <p>1 HSS & HSS-E MORSE TAPER SHANK DRILLS 2 HSS BOHRER MIT MORSEKEGEL 3 FORETS HSS Queue Cône Morse 4 PUNTE HSS CON ATTACCO CONO MORSE 5 Brocas HSS mango cónico 6 Сверла из быстрорежущей стали с хвостовиком конус Морзе 7 WIERTŁA Z CHWYTEM MORSE HSS 8 HSS MORS KONİK ŞAFTLI MATKAPLAR</p>	Morse Taper Shank Drills for Wide Applications	285
 <p>1 SOLID CARBIDE & HSSCo8 NC-SPOTTING DRILLS 2 VHM/HSS-Co8 - NC-ANBOHRER 3 FORETS CARBURE/HSSCo8 A POINTER NC 4 PUNTE NC A CENTRARE IN MDI/HSSCo8 5 Brocas de metal duro/HSS Co8 para puntear 6 Твердосплавные центровочные сверла для станков с ЧПУ из быстрорежущей стали, с содержанием кобальта 7 NAWIERTAKI WĘGLKOWE/HSSCo8 8 SOLID KARBÜR/HSS (%8 Cobalt) NC PUNTA MATKAPLARI</p>	For Centering and Chamfering of Holes	297
 <p>1 SOLID CARBIDE, HSS & HSS-E CENTER DRILLS 2 VHM/HSS - ZENTRIERBOHRER 3 FORETS CARBURE/HSS à centrar 4 PUNTE A CENTRARE MDI/HSS 5 Brocas CARBURO/HSS de centrar 6 Твердосплавные центровочные сверла из быстрорежущей стали, с содержанием кобальта 7 WIERTŁA WĘGLKOWE/HSS CE NTRUJĄCE 8 SOLID KARBÜR/HSS PUNTA MATKAPLARI</p>	For General Purpose	307
 <p>1 SPADE DRILLS, INSERTS & HOLDERS 2 HM & HSS-PM BOHRMESSER 3 LAMES CARBURE & HSS-PM 4 PUNTE SPADE DRILLS METALLO DURO & HSS-PM 5 Insertos de metall duro y HSS para taladrado 6 Сверла Spade со сменными твердосплавными пластинами из быстрорежущей стали 7 WIERTŁA SKŁADANE WĘGLKOWE I HSS-PM 8 KARBÜR ve HSS-PM DEĞİŞTİRİLEBİLİR UÇLU MATKAPLAR</p>	For General Machines and Drilling Large Diameters Longer Tool Life and High Productivity	319

HOLEMAKING TOOLS

1. ENGLISH 2.GERMAN 3.FRENCH 4. ITALIAN 5. SPANISH 6. RUSSIAN 7. POLISH 8. TURKISH

PRODUCTS	DESCRIPTION	PAGE
 <p>1 CARBIDE, HSS & HSS-E REAMERS 2 REIBAHLEN 3 ALESOIRS 4 ALESATORI 5 Escariadores 6 Развертки 7 ROZWIERTAKI 8 RAYBALAR</p>	Carbide NC Machine Reamers HSS Hand Reamers HSS-E Chucking Reamers	403
 <p>1 HSS & HSSCo8 COUNTERSINKS 2 HSS SENKER 3 FRAISES A EBAVURER HSS 4 SVASATORI IN HSS 5 Avellanadores conicos HSS mango cilindrico 6 Зенкеры из быстрорежущей стали 7 POGLĘBIACZE HSS 8 HSS HAVŞA VE PAH TAKIMLARI</p>	For Deburring, Chamfering and Countersinking	431
 <p>1 HSS-E COUNTERBORES 2 HSS-E FLACHSENKER 3 FRAISES A LAMER HSS-E 4 LAMATORI IN HSS-E 5 Avellanadores tipo Allen HSS mango cilindrico 6 Цековки из быстрорежущей стали 7 POGLĘBIACZE HSS-E 8 HSS-E KADEMELI TAKIMLAR</p>	For Machining Screw Head Seats	441

CASE STUDY

Reference page : p.53 - p.73


i-DREAM DRILL

TEST I GENERAL

Cutting Condition

HOLDER	ZH14505020
INSERT	YB1A1450 / Ø14.5
Work Material	ASTM : A36 DIN : St37-2 JIS : SS400
utting Speed	80 m/min
Feed	0.24 mm/rev.
Feedrate	421 mm/min.
RPM	1,756 rev./min.
Drilling	48.0 mm
Coolant	Internal
Machine type	Vertical Machining Center

RESULT

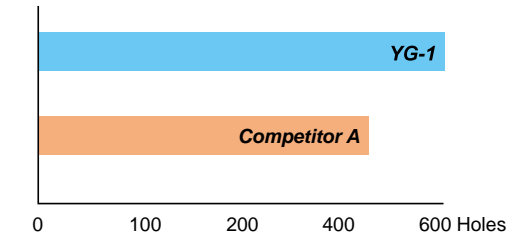

► YG-1 (Total Drilling 600 Holes)



► Competitor A (Total Drilling 470 Holes)




TEST II INOX

Cutting Condition

HOLDER	ZH14005020
INSERT	YB2C1400 / Ø14.0
Work Material	AISI : 304 DIN : X5CrNi189 JIS : SUS304
Cutting Speed	55 m/min
Feed	0.15 mm/rev.
Feedrate	188 mm/min.
RPM	1,250 rev./min.
Drilling	50.0 mm
Coolant	Internal
Machine type	Vertical Machining Center


RESULT

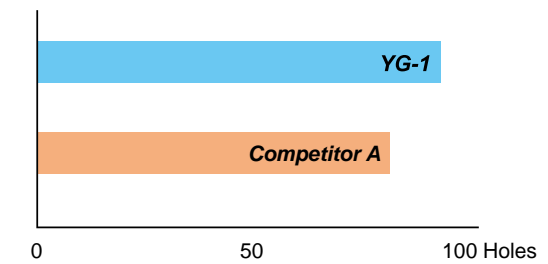

► YG-1 (Total Drilling 100 Holes)



► Competitor A (Total Drilling 80 Holes)

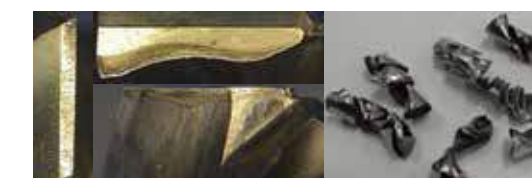


DREAM DRILLS - GENERAL

Reference page : p.75 - p.97

► **SOLID CARBIDE DREAM DRILLS - GENERAL with Coolant Holes**

Cutting Condition



Tool	DH408015 (Dream Drill with Coolant Holes)
Size	Ø1.5 x 3 x 15 x 55
Work Material	DIN : X40GrMoV51 WR : 1.2344 JIS : SKD61 (HRC30)
RPM (rev./min)	14,856 rev./min.
Feed(mm/min)	0.05 mm/rev.
Drilling Depth	7.5 mm
Coolant	Wet Cut

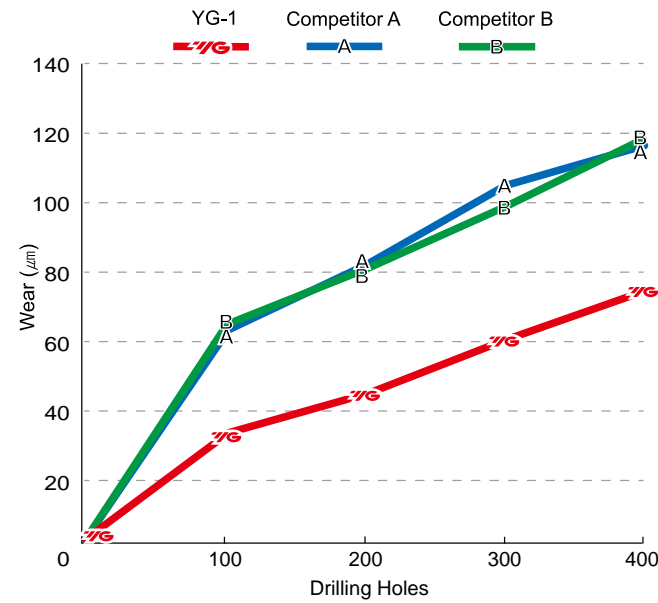


► **YG-1 (Total Drilling 400 Holes)**



► **Competitor A (Total Drilling 400 Holes)**

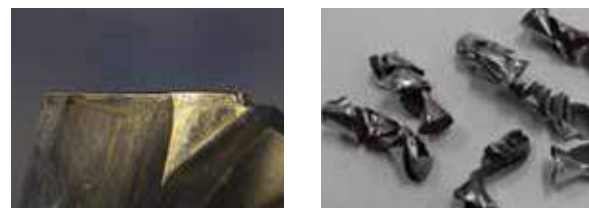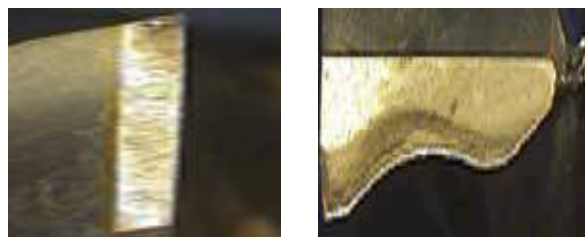

► **Competitor B (Total Drilling 400 Holes)**

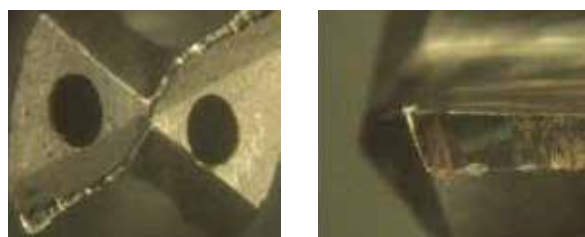

DREAM DRILLS - HIGH FEED

Reference page : p.99 - p.105

Dream Drills-High Feed offers 1.5 to 2 times higher feeding speed compared to conventional 2-flute drills. The unique flute design and exceptional surface finish promise extraordinary chip evacuation.

► **SOLID CARBIDE DREAM DRILLS - HIGH FEED with Coolant Holes**

Cutting Condition

Tool	DGR495100 (Dream Drills High Feed)
Size	Ø10 x 10 x 61 x 103
Work Material	DIN : C45 AISI : 1045 JIS : S45C (HRC20)
RPM (rev./min)	3,200 rev./min.
Feed(mm/min)	0.5 mm/rev.
Drilling Depth	50 mm (5xD)
Drilling Method	Blind Hole
Coolant	Wet Cut
Machine	Machining Center


► **YG-1 (Total Drilling 330 Holes)**



► **Competitor A (Total Drilling 330 Holes)**




► **Competitor B (Total Drilling 330 Holes)**

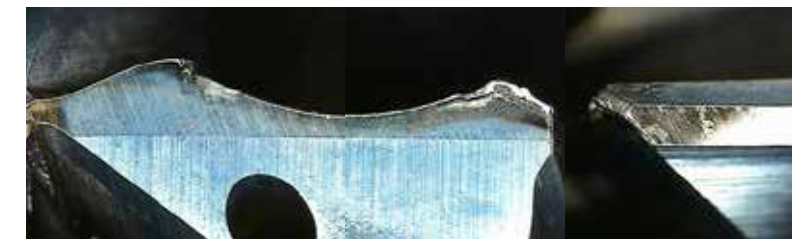

Productivity (Carbon Steel)

Ø10 5xD

1.6 times UP



DREAM DRILLS - FLAT BOTTOM



Reference page : p.107 - p.118

TEST I

► **SOLID CARBIDE DREAM DRILLS - FLAT BOTTOM without Coolant Holes**

Cutting Condition

Drill Diameter (mm)	Ø6.0
Work Material	DIN : C45 AISI : 1045 JIS : S45C (HRc20)
Cutting Speed	75.4 m/min
RPM (rev./min)	4,000 rev./min
Feed(mm/min)	0.1 mm/rev
Drilling Depth	12.0 mm (2XD) Blind Hole / without Pecking
Coolant	External Cooling Water Soluble (9% Emulsion)
Machine	Vertical Machining Center

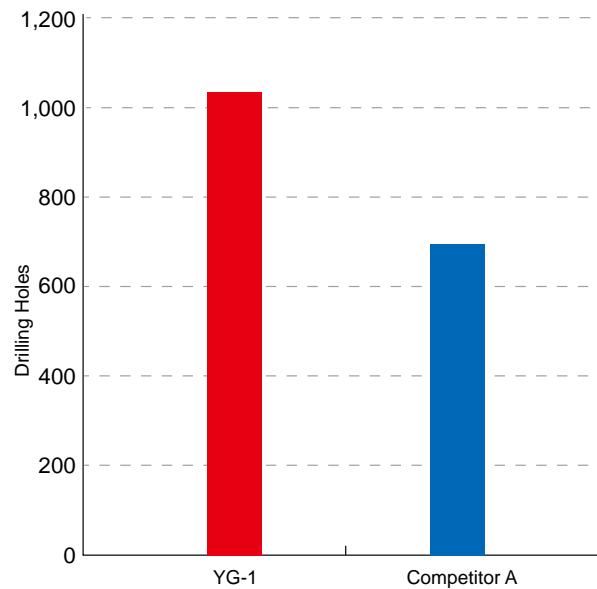

► **YG-1**



Small Chipping

► **Competitor A**





Big Chipping

TEST II

► **SOLID CARBIDE DREAM DRILLS - FLAT BOTTOM with Coolant Holes**

Cutting Condition

Tool	DH408015 (Dream Drill with Coolant Holes)
Size	Ø1.5 x 3 x 15 x 55
Work Material	DIN : X40GrMoV51 WR : 1.2344 JIS : SKD61 (HRc30)
RPM (rev./min)	14,856 rev./min.
Feed(mm/min)	0.05 mm/rev.
Drilling Depth	7.5 mm
Coolant	Wet Cut

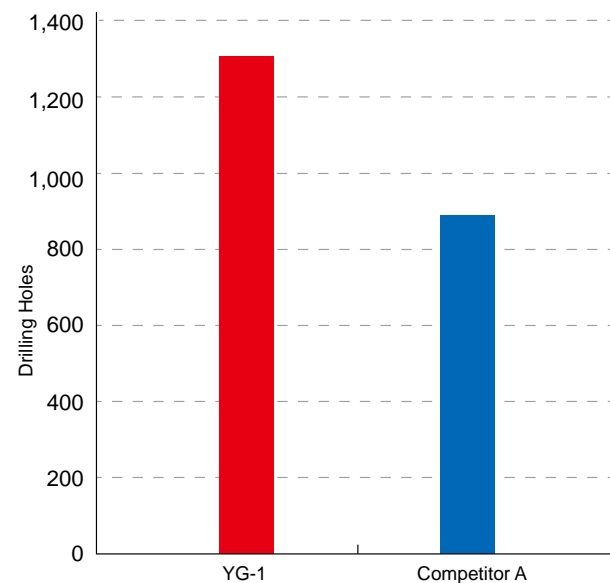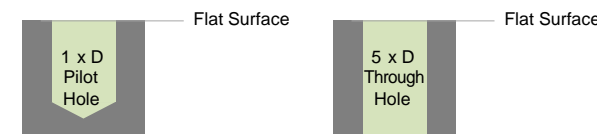

► **YG-1**



Small Chipping

► **Competitor A**



Big Chipping


DREAM DRILLS - INOX

Reference page : p.119 - p.130


► **SOLID CARBIDE DREAM DRILLS - INOX with Coolant Holes**

Cutting Condition

Tool	DH452060 (DREAM DRILL-INOX)
Size	Ø6x Ø6 x 44 x 82
Work Material	DIN : X5CrNi1810 (X4CrNi18-10) WR : 1.4301 JIS : SUS304
RPM (rev./min)	3,700 rev./min.
Feed(mm/min)	0.07 mm/rev.
Drilling Depth	24 mm
Coolant	Wet Cut

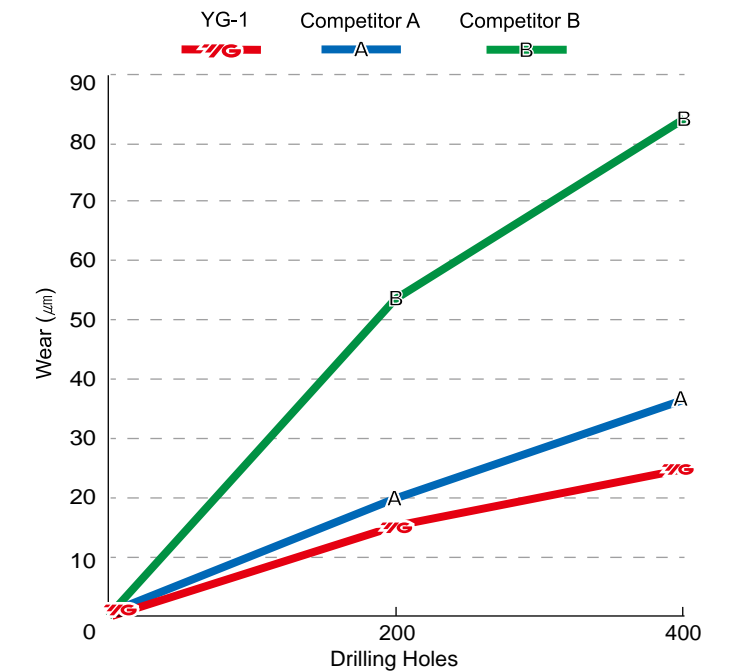

► **YG-1 (Total Drilling 400 Holes)**

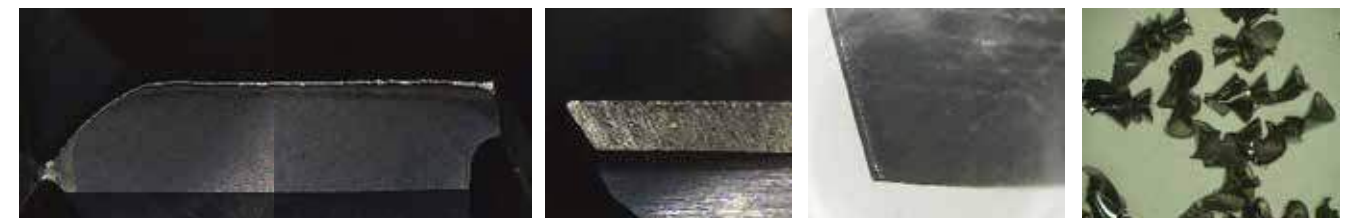

► **Competitor A (Total Drilling 400 Holes)**



► **Competitor B (Total Drilling 400 Holes)**




DREAM DRILLS - ALU

Reference page : p.131 - p.141

► **SOLID CARBIDE DREAM DRILLS - ALU with Coolant Holes**


Cutting Condition

Tool	D5433100 (DREAM DRILLS-ALU)
Size	Ø10.0×Ø10×61×103
Work Material	DIN : AlMgSiCu AISI : 6061 JIS : A6061
RPM (rev./min)	6,367 rev./min.
Feed(mm/min)	0.4 ~ 0.8 mm/rev.
Drilling Depth	45 mm
Coolant	Wet Cut

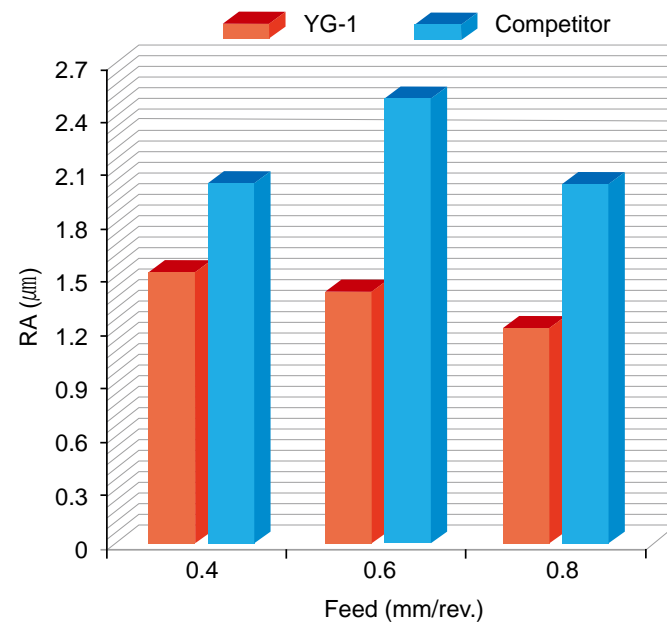


Surface Roughness of Work Piece

► **YG-1 (Total Drilling 820 Holes)**

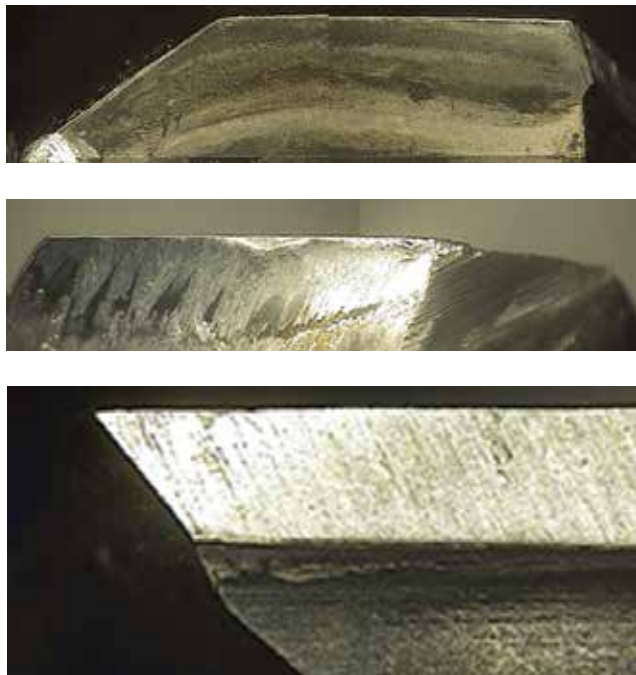

► **Competitor A (Total Drilling 820 Holes)**

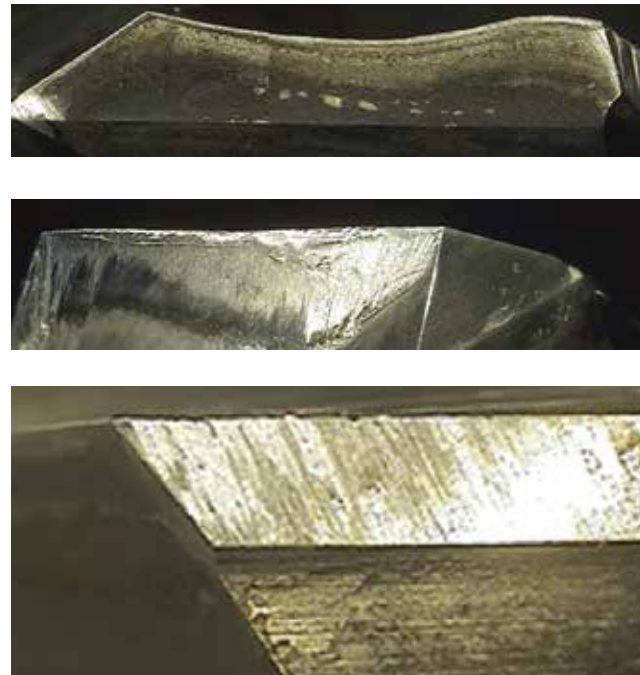



DREAM DRILLS - CFRP

Reference page : p.143 - p.146

► **SOLID CARBIDE DREAM DRILLS - CFRP without Coolant Holes**

Cutting Condition

Tool	DI473060 (DREAM DRILLS - CFRP)
Size	82×44×6×6Ø
Work Material	CFRP
RPM (rev./min)	6,366 rev./min.
Feed(mm/min)	254.64 mm/min.
Drilling Depth	6 mm, Through Hole
Coolant	Dry Cut

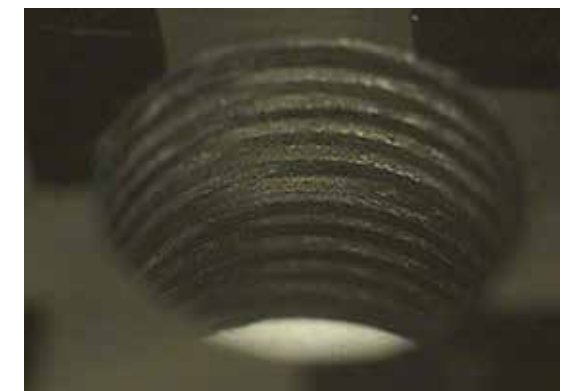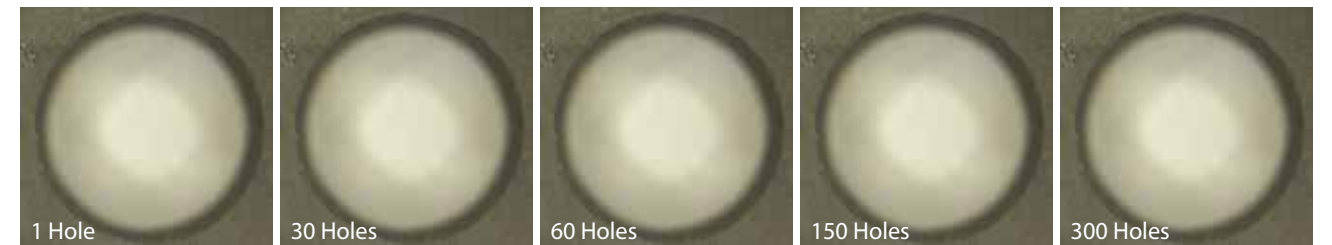

DREAM DRILLS - MQL TYPE


Reference page : p.147 - p.155

- Flute Shape and Point Shape allowing better chip evacuation in deep hole drilling
- Excellent Coating and Surface Treatment for better performance and chip evacuation


► **SOLID CARBIDE DREAM DRILLS - MQL Type with Coolant Holes**

Cutting Condition


Tool	DH520060 (DREAM DRILL- MQL TYPE, 20xD)
Size	Ø6x6x138x193
Work Material	DIN : C45 WR : 1.0503 JIS : S45C(HRc25)
RPM (rev./min)	3,528 rev./min.
Feed(mm/min)	0.19 mm/rev.
Drilling Depth	80 mm
Coolant	Oil Mist (MQL Techniques)

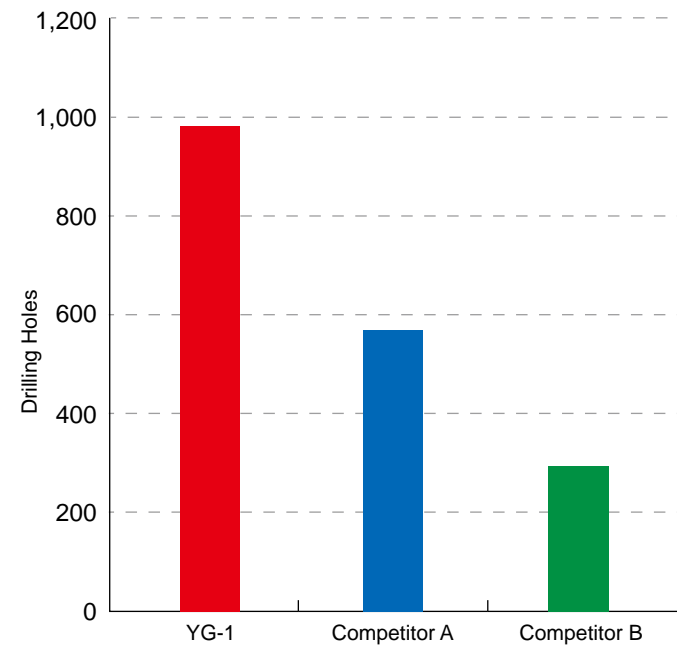

► **YG-1 (After Drilling 1,000 Holes)**

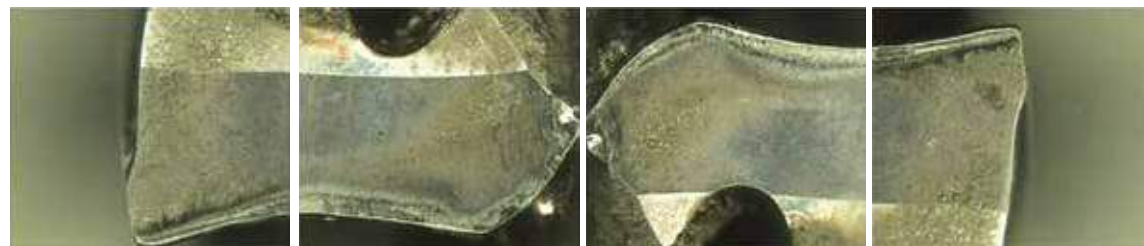

► **Competitor A (After Drilling 546 Holes)**

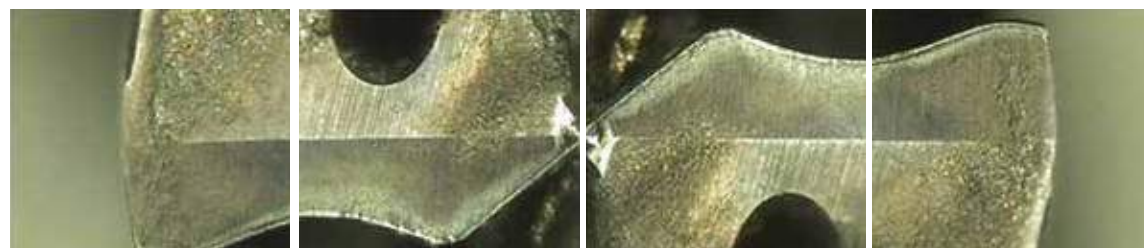

DREAM DRILLS for HIGH HARDENED STEEL


Reference page : p.157 - p.160

- Low Helix Angle to maximize tools' rigidity
- Special Point Thinning to improve chip evacuation
- Excellent Coating and Surface Treatment for improved surface and better chip evacuation


► **SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS (HRc50-70)**

Cutting Condition

Tool	DH500100 (Dream Drills for High Hardened Steels)
Size	Ø10x10x63x111
Work Material	DIN : X155CrV-Mo12-1 WR : 1.2379 JIS : SKD11(HRc60)
RPM (rev./min)	380 rev./min..
Feed(mm/min)	0.04 mm/rev.
Drilling Depth	25 mm(2.5xD)
Coolant	Wet Cut

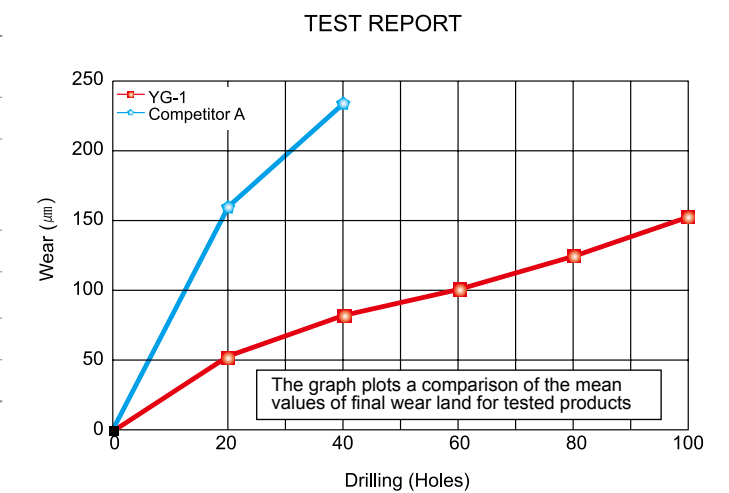

► **YG-1 (After Drilling 100 Holes)**

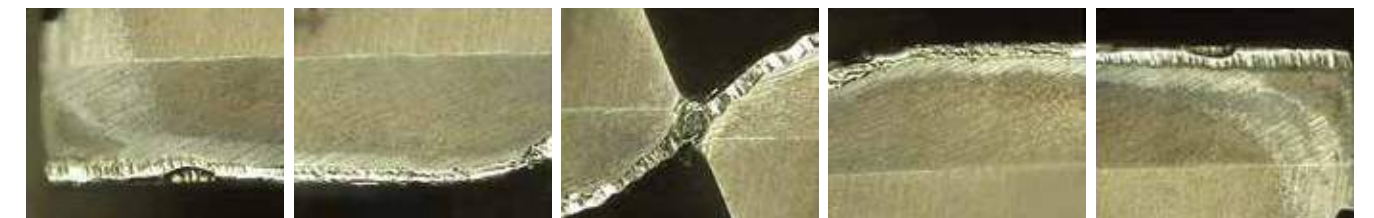



► **Competitor A (After Drilling 40 Holes)**



MULTI-1 DRILLS

Reference page : p.169 - p.177

TEST I Comparison of edge wear

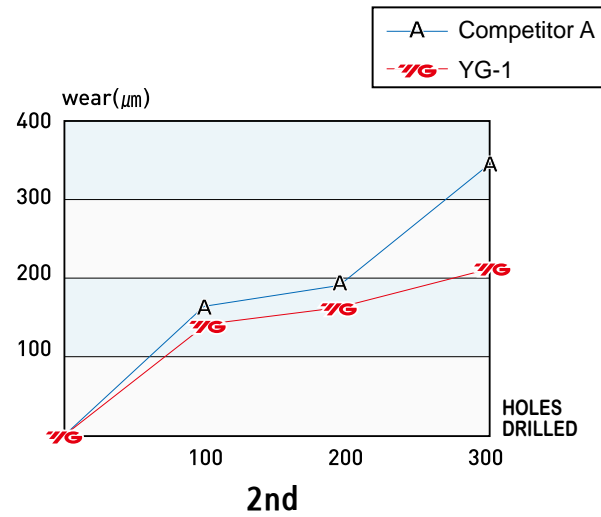
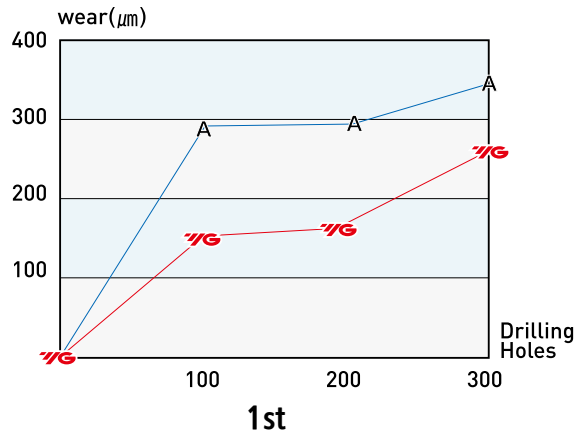


Cutting Condition

Work Material	JIS : SUS316 DIN : X3CrNiMo17-13-3 WR : 1.4436
---------------	--

Drilling Depth	24mm
Total Drilling (hole)	300 Holes
R.P.M	600 rev./min.
Feed	110 mm/min.

TEST II Comparison of edge wear

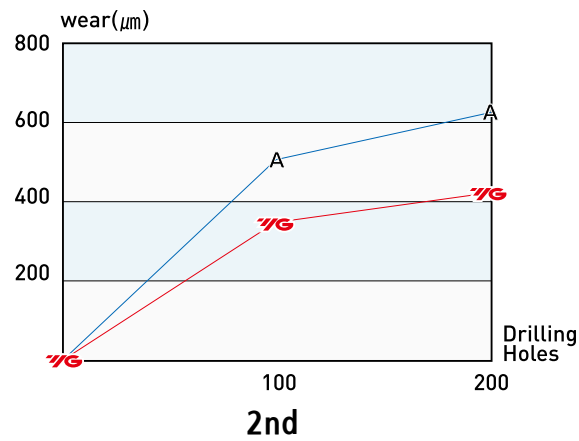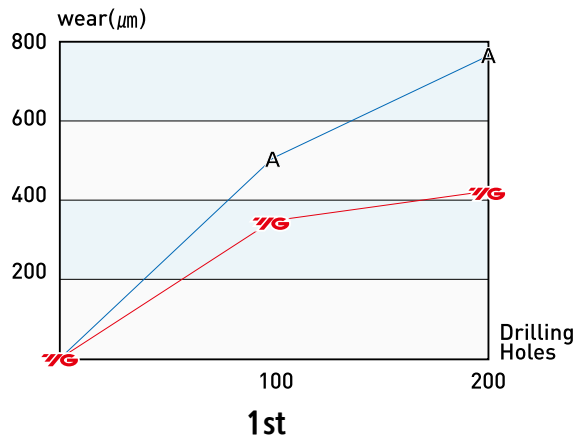

Cutting Condition

Work Material	JIS : SKD11 DIN : X155CrVMo12-1 WR : 1.4436
---------------	---

Drilling Depth	24mm
Total Drilling (hole)	200 Holes
R.P.M	600 rev./min.
Feed	110 mm/min.

► YG-1



► Competitor A



HOLEMAKING TOOLS

- i-ONE DRILLS, CARBIDE INSERTS & HOLDERS
- i-DREAM DRILLS, CARBIDE INSERTS & HOLDERS
- SOLID CARBIDE DREAM DRILLS - GENERAL (with & without Coolant Holes)
- SOLID CARBIDE DREAM DRILLS - HIGH FEED (with Coolant Holes)
- SOLID CARBIDE DREAM DRILLS - FLAT BOTTOM (with & without Coolant Holes)
- SOLID CARBIDE DREAM DRILLS - INOX (with Coolant Holes)
- SOLID CARBIDE DREAM DRILLS - ALU (with Coolant Holes)
- SOLID CARBIDE DREAM DRILLS - CFRP (without Coolant Holes)
- SOLID CARBIDE DREAM DRILLS - MQL TYPE (with Coolant Holes)
- SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS (without Coolant Holes)
- GENERAL SOLID CARBIDE DRILLS (JOBBER & STUB LENGTH)
- HSS-PM MULTI-1 DRILLS
- HSSCo8 & HSS-E HPD STRAIGHT SHANK DRILLS
- HSS & HSS-E GOLD-P DRILLS
- SUPER HSS SUPER-GP DRILLS
- HSS, HSS-E & HSSCo8 STRAIGHT SHANK DRILLS
- HSS & HSS-E MORSE TAPER SHANK DRILLS
- SOLID CARBIDE & HSSCo8 NC-SPOTTING DRILLS
- SOLID CARBIDE, HSS & HSS-E CENTER DRILLS
- SPADE DRILLS, INSERTS & HOLDERS
- CARBIDE, HSS & HSS-E REAMERS
- HSS & HSSCo8 COUNTERSINKS
- HSS-E COUNTERBORES
- TECHNICAL DATA

YG-1 CO., LTD.

CARBIDE INSERT DRILLS

SOLID CARBIDE DRILLS

HSS DRILLS

CARBIDE & HSS DRILLS

REAMERS

COUNTERSINKS

COUNTERBORES

TECHNICAL DATA

i-ONE DRILLS, CARBIDE INSERTS & HOLDERS
High Performance Exchangeable for General Steels and Cast Iron

i-DREAM DRILLS, CARBIDE INSERTS & HOLDERS
For General Steels and Stainless Steels

SOLID CARBIDE DREAM DRILLS - GENERAL (with & without Coolant Holes)
For General Purpose (HRc30 to HRc45)

SOLID CARBIDE DREAM DRILLS - HIGH FEED (with Coolant holes)
1.5 to 2 Times Faster Feeding Speed than 2-Flute Drill for Carbon Steels, Alloy Steels(up to HRc35) and Cast Iron

SOLID CARBIDE DREAM DRILLS - FLAT BOTTOM (with & without Coolant Holes)
For Holes on Various Angled Surfaces

SOLID CARBIDE DREAM DRILLS - INOX (with Coolant Holes)
For Tough Materials like Stainless Steels, Nickel Alloys and Titanium

SOLID CARBIDE DREAM DRILLS - ALU (with Coolant Holes)
For Aluminum and Aluminum Alloys

SOLID CARBIDE DREAM DRILLS - CFRP (without Coolant Holes)
For Composite Materials including CFRP and GFRP

SOLID CARBIDE DREAM DRILLS - MQL TYPE (with Coolant Holes)
Minimum Quantity Lubrication Drilling Deep Holes (10xD ~ 30xD)

SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS (without Coolant Holes)
For High Hardened Steels (HRc50 to HRc70)

GENERAL SOLID CARBIDE DRILLS (JOBBER & STUB LENGTH)
For General Purpose, DIN338 & DIN6539

HSS-PM MULTI-1 DRILLS
Premium HSS-PM Drills For Wide Range of Applications Particularly Stainless Steels and Titanium

HSSCo8 & HSS-E HPD STRAIGHT SHANK DRILLS
High Precision Drilling for General Steels & Stainless Steels

HSS & HSS-E GOLD-P DRILLS
Same Performance as Full TiN-coated Drills

SUPER HSS SUPER-GP DRILLS
All Applications Regardless of Machining Conditions; Good or Poor

HSS, HSS-E & HSSCo8 STRAIGHT SHANK DRILLS
For General Purpose (Soft & Tough Materials)

HSS & HSS-E MORSE TAPER SHANK DRILLS
Morse Taper Shank Drills for Wide Applications

SOLID CARBIDE & HSSCo8 NC-SPOTTING DRILLS
For Centering and Chamfering of Holes

SOLID CARBIDE, HSS & HSS-E CENTER DRILLS
For General Purpose

SPADE DRILLS, INSERTS & HOLDERS
For General Machines and Drilling Large Diameters Longer Tool Life and High Productivity

CARBIDE, HSS & HSS-E REAMERS
Carbide NC Machine Reamers / HSS Hand Reamers / HSS-E Chucking Reamers

HSS & HSSCo8 COUNTERSINKS
For Deburring, Chamfering and Countersinking

HSS-E COUNTERBORES
For Machining Screw Head Seats

TECHNICAL DATA

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-CFRP

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED
STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
SIZE MIN
SIZE MAX
PAGE

i-ONE DRILLS INSERTS					
Y101H	Y121H	Y141H	Y161H	Y181H	Y201H
10.00	12.00	14.00	16.00	18.00	20.00
11.91	13.90	15.90	17.90	19.90	21.90
38	39	40	41	42	43

SURFACE TREATMENT

H-Coating



Please visit globalyg1.com/mat for material search

◎: Excellent ○: Good

ISO	VDI 3323	Material Description	HB	HRc
P	1	Non-alloy steel	125	
	2		190	13
	3		250	25
	4		270	28
	5		300	32
	6	Low alloy steel	180	10
	7		275	29
	8		300	32
	9		350	38
	10		High alloyed steel, and tool steel	200
	11	325		35
M	12		200	15
	13	Stainless steel	240	23
14	180		10	
K	15	Grey cast iron	180	10
	16		260	26
	17	Nodular cast iron	160	3
	18		250	25
19	Malleable cast iron	130		
20		230	21	
N	21	Aluminum-wrought alloy	60	
	22		100	
	23	Aluminum-cast, alloyed	75	
	24		90	
	25		130	
	26	Copper and Copper Alloys (Bronze / Brass)	110	
	27		90	
	28		100	
	29			
	30	Non Metallic Materials		
S	31	Heat Resistant Super Alloys	200	15
	32		280	30
	33		250	25
	34		350	38
	35		320	34
	36	Titanium Alloys	400 Rm	
	37		1050 Rm	
H	38	Hardened steel	550	55
	39		630	60
	40	Chilled Cast Iron	400	42
	41		550	55

i-ONE DRILLS INSERTS						i-ONE DRILLS HOLDERS		
Y221H	Y241H	Y261H	Y281H	Y301H	Y321H	ZD*3	ZD*5	ZD*8
22.00	24.00	26.00	28.00	30.00	32.00			
23.90	25.90	27.78	29.77	31.75	33.73			
44	45	46	46	47	47			

H-Coating



◎	◎	◎	◎	◎	◎				1
◎	◎	◎	◎	◎	◎				2
◎	◎	◎	◎	◎	◎				3
◎	◎	◎	◎	◎	◎				4
◎	◎	◎	◎	◎	◎				5
◎	◎	◎	◎	◎	◎				6
◎	◎	◎	◎	◎	◎				7
◎	◎	◎	◎	◎	◎				8
◎	◎	◎	◎	◎	◎				9
◎	◎	◎	◎	◎	◎				10
◎	◎	◎	◎	◎	◎				11
									12
									13
									14
◎	◎	◎	◎	◎	◎				15
◎	◎	◎	◎	◎	◎				16
◎	◎	◎	◎	◎	◎				17
◎	◎	◎	◎	◎	◎				18
◎	◎	◎	◎	◎	◎				19
◎	◎	◎	◎	◎	◎				20
									21
									22
									23
									24
									25
									26
									27
									28
									29
									30
									31
									32
									33
									34
									35
									36
									37
									38
									39
									40
									41

SELECTION GUIDE



HOLEMAKING TOOLS

Please visit globalyg1.com/mat for material search

◎: Excellent ○: Good

SURFACE TREATMENT

SPADE DRILLS INSERTS

SERIES	1~8	Y,Z,0,1~4	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3
SIZE MIN	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
SIZE MAX	Ø114.3(#8)	Ø65.09(#4)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)
PAGE	322	328	333	336	339	343

TiN / TiCN / TiAlN



ISO	VDI 3323	Material Description	HB	HRc	1~8	Y,Z,0,1~4	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	
P	1	Non-alloy steel	125		○	◎	◎		○	◎	
	2		190	13	○	◎	◎		○	◎	
	3		250	25	○	◎	◎		○	◎	
	4		270	28	○	◎	◎		○	◎	
	5		300	32							
	6	Low alloy steel	180	10	○	◎	◎		○	◎	
	7		275	29	○	◎	◎		○	◎	
	8		300	32		○	◎		○	◎	
	9		350	38		○	◎		○	◎	
	10		High alloyed steel, and tool steel	200	15		○	◎		○	◎
	11	325		35		○	◎		○	◎	
M	12	Stainless steel	200	15	◎	○		◎	○		
	13		240	23	◎	○		◎	○		
	14		180	10	◎	○		◎	○		
	15		180	10	◎	○	○	◎	○	○	
K	16	Grey cast iron	260	26	○	◎	◎	◎	○	○	
	17		160	3	◎	○	○	◎	○	○	
	18	Nodular cast iron	250	25	○	◎	◎	◎	○	○	
	19		130		◎	○	○	◎	○	○	
	20		Malleable cast iron	230	21	○	◎	◎	◎	○	○
N	21	Aluminum-wrought alloy	60		◎	○	○	◎	○		
	22		100		◎	○	○	◎	○		
	23	Aluminum-cast, alloyed	75								
	24		90								
	25		130								
	26	Copper and Copper Alloys (Bronze / Brass)	110								
	27		90		◎	○	○	◎	○		
	28	100									
	29	Non Metallic Materials									
	30										
S	31	Heat Resistant Super Alloys	200	15		◎	◎		◎	○	
	32		280	30		○	◎		◎	○	
	33		250	25		○	◎		◎	○	
	34		350	38		○	◎		◎	○	
	35		320	34		○	◎		◎	○	
	36	Titanium Alloys	400 Rm								
	37		1050 Rm								
H	38	Hardened steel	550	55		○	◎		○	◎	
	39		630	60							
	40	Chilled Cast Iron	400	42							
	41	Hardened Cast Iron	550	55							

SPADE DRILLS INSERTS

1~3	Y,Z,0,1~3	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	Y,Z,0,1,2
Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)
348	351	355	358	361	365	369

TiN / TiCN / TiAlN



1~3	Y,Z,0,1~3	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	Y,Z,0,1,2	1
○	◎	◎		○	◎	◎	1
○	◎	◎		○	◎	◎	2
○	◎	◎		○	◎	◎	3
○	◎	◎		○	◎	◎	4
							5
○	◎	◎		○	◎	◎	6 P
○	◎	◎		○	◎	◎	7
	○	◎		○	◎	○	8
	○	◎		○	◎	○	9
	○	◎		○	◎	○	10
	○	◎		○	◎	○	11
◎	○			◎	○	○	12
◎	○			◎	○	○	13 M
◎	○			◎	○	○	14
◎	○	○	◎	○	○	○	15
○	◎	◎	◎	○	○	◎	16
◎	○	○	◎	○	○	○	17 K
○	◎	◎	◎	○	○	◎	18
◎	○	○	◎	○	○	○	19
○	◎	◎	◎	○	○	◎	20
◎	○	○		◎	○	○	21
◎	○	○		◎	○	○	22
							23
							24
							25 N
							26
◎	○	○		◎	○	○	27
							28
							29
							30
	◎	◎		◎	○	◎	31
	○	◎		◎	○	○	32
	○	◎		◎	○	○	33
	○	◎		◎	○	○	34 S
	○	◎		◎	○	○	35
							36
							37
	○	◎		○	◎	○	38
							39 H
							40
							41

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES

DRILLING DEPTH

LENGTH


SIZE MIN

SIZE MAX

PAGE

SURFACE TREATMENT


DREAM DRILLS GENERAL						DREAM DRILLS HIGH FEED	
DH404	DH423	DH424	DH406	DH408	DH421	DGR493	DGR495
3XD	3XD	5XD	3XD	5XD	8XD	3XD	5XD
STUB	SHORT	LONG	SHORT	LONG	EXTRA LONG	SHORT	LONG
D3.0	D3.0	D1.0	D3.0	D1.0	D3.0	D5.0	D5.0
D20.0	D20.0	D20.0	D20.0	D20.0	D14.0	D20.0	D20.0
78	80	83	86	89	92	101	103
TiAIN						H-Coating	

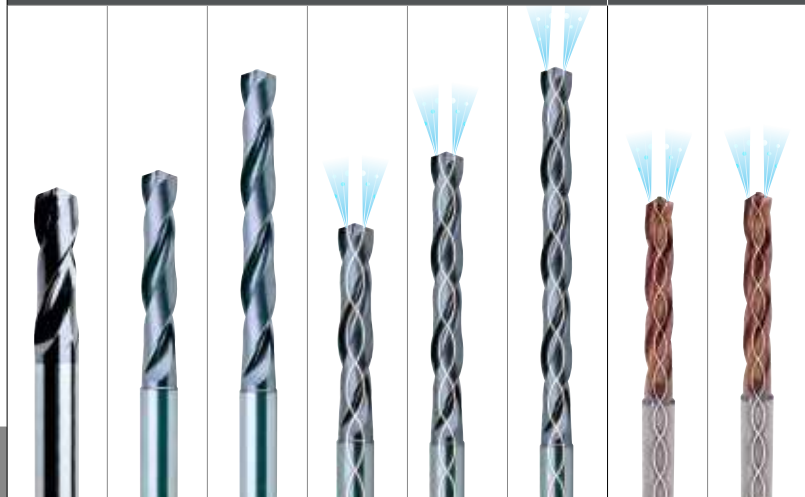

Please visit globalyg1.com/mat for material search
 ◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	HB	HRc								
P	1	Non-alloy steel	125									
	2		190	13	◎	◎	◎	◎	◎	◎	◎	
	3		250	25	◎	◎	◎	◎	◎	◎	◎	
	4		270	28	◎	◎	◎	◎	◎	◎	◎	
	5		300	32	○	○	○	○	○	○	○	
	6	180	Low alloy steel	10								
	7	275		29	◎	◎	◎	◎	◎	◎	◎	
	8	300		32	○	○	○	○	○	○	○	
	9	350		38	○	○	○	○	○	○	○	
	10	200		High alloyed steel, and tool steel	15							
	11	325			35	◎	◎	◎	◎	◎	◎	◎
M	12	Stainless steel	200	15	○	○	○	○	○	○		
	13		240	23	○	○	○	○	○	○		
	14		180	10								
K	15	Grey cast iron	180	10	◎	◎	◎	◎	◎	◎		
	16		260	26	○	○	○	○	○	○		
	17	Nodular cast iron	160	3	◎	◎	◎	◎	◎	◎		
	18		250	25	○	○	○	○	○	○		
	19		130		◎	◎	◎	◎	◎	◎		
20	Malleable cast iron	230	21	○	○	○	○	○	○			
N	21	Aluminum-wrought alloy	60									
	22		100									
	23	Aluminum-cast, alloyed	75									
	24		90									
	25		130									
	26	Copper and Copper Alloys (Bronze / Brass)	110									
	27		90									
	28		100									
	29	Non Metallic Materials										
	30											
S	31	Heat Resistant Super Alloys	200	15								
	32		280	30								
	33		250	25								
	34		350	38								
	35		320	34								
	36		400 Rm									
	37		1050 Rm									
H	38	Hardened steel	550	55								
	39		630	60								
	40		400	42								
41	Hardened Cast Iron	550	55									

DREAM DRILLS FLAT BOTTOM		DREAM DRILLS INOX			DREAM DRILLS ALU			DREAM DRILLS CFRP	DREAM DRILLS -MQL TYPE		
DPP447	DH450	DH451	DH452	DH453	D5432	D5433	D5434	DI473	DH510	DH515	DH520
2XD	5XD	3XD	5XD	8XD	3XD	5XD	8XD	5XD	10XD	15XD	20XD
SHORT	LONG	SHORT	LONG	EXTRA LONG	SHORT	LONG	EXTRA LONG	LONG	EXTRA LONG	EXTRA LONG	EXTRA LONG
D3.0	D3.0	D3.0	D1.0	D3.0	D3.0	D3.0	D3.0	D2.5	D3.0	D3.0	D3.0
D20.0	D20.0	D20.0	D20.0	D14.0	D20.0	D20.0	D14.0	D12.0	D14.0	D12.0	D12.0
110	113	121	124	127	133	136	139	145	150	151	151
X-Coating	TiAIN	TiAIN			Bright			Diamond Coating	TiAIN		

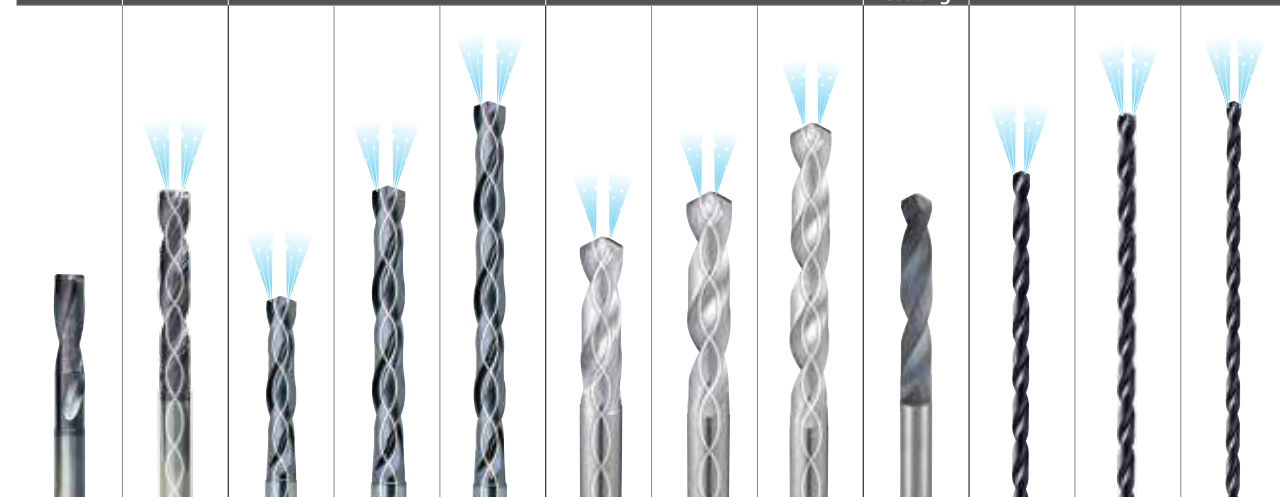

◎	◎								◎	◎	◎	1
◎	◎	◎	◎	◎					◎	◎	◎	2
◎	◎	○	○	○					○	○	○	3
○	○											4
○	○											5
◎	◎	◎	◎	◎					◎	◎	◎	6 P
○	○	○	○	○					○	○	○	7
○	○								○	○	○	8
○	○								○	○	○	9
○	○								○	○	○	10
○	○	◎	◎	◎								11
○	○	◎	◎	◎								12
		◎	◎	◎								13 M
		◎	◎	◎								14
◎	◎								◎	◎	◎	15
○	○								○	○	○	16
									◎	◎	◎	17 K
									○	○	○	18
									◎	◎	◎	19
									○	○	○	20
○	○	◎	◎	◎	◎	◎	◎					21
○	○	◎	◎	◎	◎	◎	◎					22
		○	○	○	◎	◎	◎					23
		○	○	○	◎	◎	◎					24
		○	○	○								25 N
												26
												27
												28
								◎				29
												30
												31
												32
												33
												34 S
												35
												36
												37
		○	○	○								38
												39
												40 H
												41

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES	DREAM DRILLS - MQL TYPE					DREAM DRILLS for HIGH HARDENED STEELS	GENERAL CARBIDE DRILLS	
	DHM10	DHM15	DHM20	DHM25	DHM30		DH500	D5405
DRILLING DEPTH / STANDARD	10XD	15XD	20XD	25XD	30XD	3XD	-	-
LENGTH	EXTRA LONG	EXTRA LONG	EXTRA LONG	EXTRA LONG	EXTRA LONG	SHORT	STUB	JOBBER
SIZE MIN	D3.0	D3.0	D3.0	D3.0	D3.0	D2.6	D1.0	D1.0
SIZE MAX	D14.0	D12.0	D12.0	D10.0	D8.0	D14.0	D13.0	D13.0
PAGE	152	152	152	153	153	159	163	165

SURFACE TREATMENT	TiAlN					TiAlN	Bright	
-------------------	-------	--	--	--	--	-------	--------	--




Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	HB	HRc									
P	1	Non-alloy steel	125		◎	◎	◎	◎	◎		◎	◎	
	2		190	13	◎	◎	◎	◎	◎		◎	◎	
	3		250	25	○	○	○	○	○		○	○	
	4		270	28									
	5		300	32									
	6	180	Low alloy steel	10		◎	◎	◎	◎	◎		○	○
	7	275		29	○	○	○	○	○				
	8	300		32	○	○	○	○	○				
	9	350		38									
	10	200		High alloyed steel, and tool steel	15		○	○	○	○	○		
	11	325	35		○	○	○	○	○				
M	12	Stainless steel	200	15							○	○	
	13		240	23									
	14		180	10									
K	15	Grey cast iron	180	10	◎	◎	◎	◎	◎		○	○	
	16		260	26	○	○	○	○	○				
	17	Nodular cast iron	160	3	◎	◎	◎	◎	◎				
	18		250	25	○	○	○	○	○				
19	Malleable cast iron	130		◎	◎	◎	◎	◎					
20		230	21	○	○	○	○	○					
N	21	Aluminum-wrought alloy	60								◎	◎	
	22		100								◎	◎	
	23		75									◎	◎
	24	Aluminum-cast, alloyed	90								◎	◎	
	25		130										
	26		110										
	27		90										
28	Copper and Copper Alloys (Bronze / Brass)	90											
29		100											
30	Non Metallic Materials												
S	31	Heat Resistant Super Alloys	200	15									
	32		280	30									
	33		250	25									
	34		350	38									
	35		320	34									
	36		400 Rm									○	○
37	1050 Rm												
H	38	Hardened steel	550	55							◎		
	39		630	60							◎		
	40		400	42									
41	Hardened Cast Iron	550	55										

MULTI-1 DRILLS		HPD DRILLS				GOLD-P DRILLS				SUPER-GP DRILLS	
CDRA03	CDRA04	D4541	D4542	DJ543	DJ544	D1GP125	D1GP165	DLGP195	DLGP506	DSH105	
HSS-PM		HSSCo8				HSS-E		DIN338	DIN338	DIN338	DIN338
STUB	JOBBER	STUB	JOBBER	STUB	JOBBER	JOBBER	JOBBER	JOBBER	JOBBER	JOBBER	
D1.0	D2.0	D2.0	D2.0	D2.0	D2.0	D1.0	D1.6	D1.0	D2.0	D2.0	
D13.0	D13.0	D13.0	D32.0	D13.0	D20.0	D13.0	D13.0	D13.0	D13.0	D13.0	
171	174	182	186	192	195	206	209	212	215	223	

TiAlN		TiN				TiN				Steam Tempered
-------	--	-----	--	--	--	-----	--	--	--	----------------

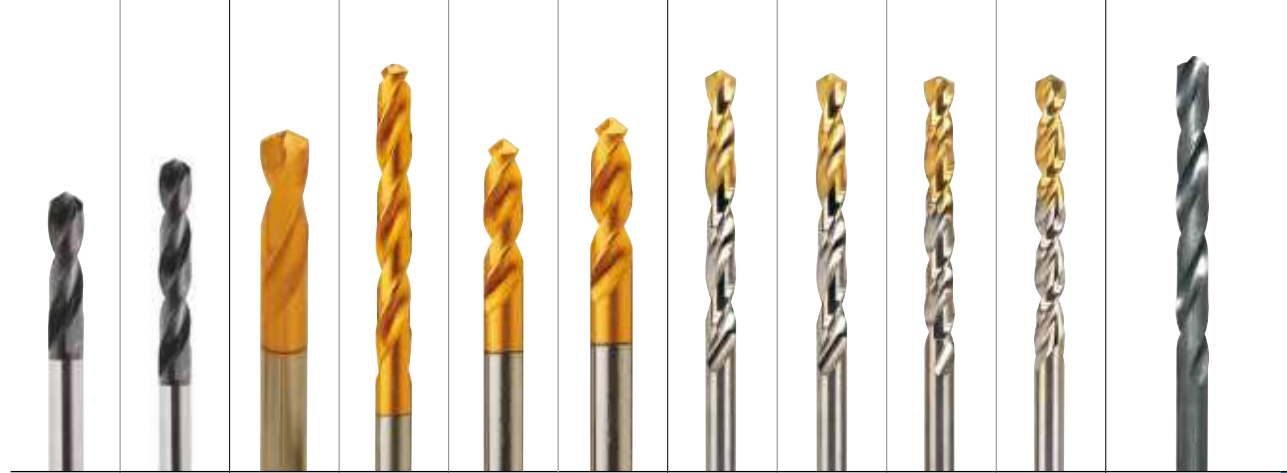

◎	◎	◎	◎	○	○	◎	◎	◎	◎	◎	1
◎	◎	◎	◎			◎	◎	◎	◎	◎	2
○	○	○	○			◎	◎	◎	◎	◎	3
						○	○	○	○	○	4
											5
◎	◎	◎	◎			◎	◎	◎	◎	◎	6 P
○	○	○	○			○	○	○	○	○	7
						○	○	○	○	○	8
											9
		○	○			○	○	○	○	○	10
											11
○	○			◎	◎	◎	◎	◎		○	12
				○	○	○	○	○		○	13 M
◎	◎			◎	◎	○	○	○		○	14
○	○	◎	◎			○	○	○	○	○	15
						○	○	○	○	○	16
						○	○	○	○	○	17
											18
						○	○	○	○	○	19
									○		20
◎	◎			◎	◎	○	○	○		○	21
◎	◎			◎	◎	○	○	○		○	22
○	○					○	○	○		○	23
○	○										24
											25
				○	○						26
											27
											28
						○	○	○		○	29
											30
											31
											32
											33
											34 S
											35
○	○					○	○	○		○	36
											37
											38
											39
											40
											41

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

SELECTION GUIDE



HOLEMAKING TOOLS


Please visit globalyg1.com/mat for material search
⊙: Excellent ○: Good

SERIES
STANDARD
LENGTH
SIZE MIN
SIZE MAX
PAGE

STRAIGHT SHANK DRILLS

	D2107	D1107	D2105	DL105	D1105	D1125	D2104	D1121
	DIN1897	DIN1897	DIN338	DIN338	DIN338	DIN338	DIN340	DIN1869/1
	STUB	STUB	JOBBER	JOBBER	JOBBER	JOBBER	LONG	EXTRA LONG
	D1.0	D1.0	D1.0	D1.0	D0.3	D2.0	D2.0	D2.0
	D31.0	D13.0	D20.0	D20.0	D20.0	D20.0	D12.0	D13.0
	234	238	241	244	247	252	255	257
	Gold Coloring	Steam Tempered	Gold Coloring	Steam Tempered	Bright	Gold Coloring	Steam Tempered	


SURFACE TREATMENT

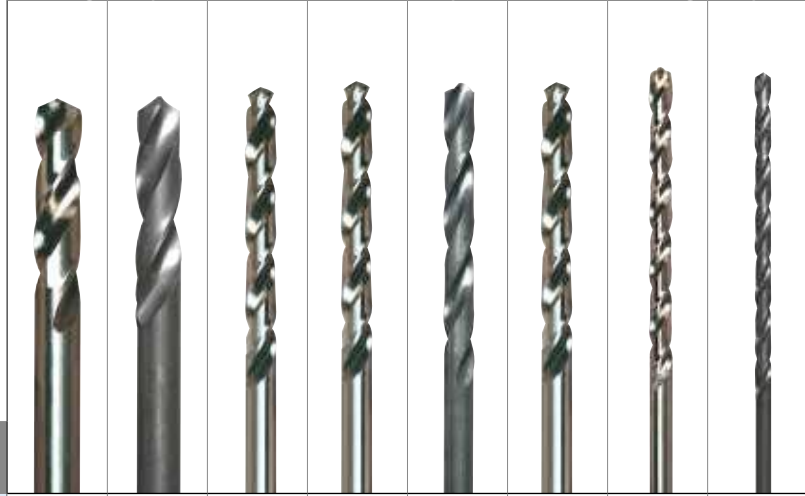

ISO	VDI 3323	Material Description	HB	HRc	D2107	D1107	D2105	DL105	D1105	D1125	D2104	D1121	
P	1	Non-alloy steel	125		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	2		190	13	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	3		250	25	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	4		270	28	○	○	○	○	○	○	○	○	
	5		300	32									
	6	180	Low alloy steel	10	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	7	275		29	○	○	○	○	○	○	○	○	
	8	300		32	○	○	○	○	○	○	○	○	
	9	350		38									
	10	200		15	○	○	○	○	○	○	○	○	○
		11	High alloyed steel, and tool steel	325	35								
	12	200		15	⊙	○	⊙	⊙	○	○	⊙	○	
M		Stainless steel	240	23	○	○	○	○	○	○	○	○	
			14	180	10	○	○	○	○	○	○	○	
	K		Grey cast iron	180	10	○	○	○	○	○	○	○	○
		16		260	26	○	○	○	○	○	○	○	
		Nodular cast iron	17	160	3	○	○	○	○	○	○	○	
			18	250	25								
	Malleable cast iron	19	130		○	○	○	○	○	○	○	○	
		20	230	21									
			Aluminum-wrought alloy	21	60	○	○	○	○	○	○	○	○
	22	100		○	○	○	○	○	○	○	○		
N	Aluminum-cast, alloyed	23		75	○	○	○	○	○	○	○	○	
		24		90									
	25	130											
	Copper and Copper Alloys (Bronze / Brass)	26		110									
		27		90									
		28	100										
		Non Metallic Materials	29			○	○	○	○	○	○	○	○
			30										
S	Heat Resistant Super Alloys	31	200	15									
		32	280	30									
		33	250	25									
		34	350	38									
		35	320	34									
	Titanium Alloys	36	400 Rm		○	○	○	○	○	○	○	○	
		37	1050 Rm										
H	Hardened steel	38	550	55									
		39	630	60									
		40	400	42									
	41	Hardened Cast Iron	550	55									

STRAIGHT SHANK DRILLS

DL109	D1100	D1106	DH100 DL510	DH100 DL508	DH100 DL509	DH100 DL505	DH100 DL504	DH100 DT600	DH100 DT692	DH100 DT693
DIN338	DIN338	DIN338	DIN1897	DIN338	DIN340	DIN338	DIN340	DIN1869/1	DIN1869/2	DIN1869/3
JOBBER	JOBBER	JOBBER	STUB	JOBBER	LONG	JOBBER	LONG	EXTRA LONG		
D1.5	D1.5	D1.5	D2.0	D2.0	D2.0	D2.0	D2.0	D2.0	D3.0	D4.0
D13.0	D13.0	D13.0	D20.0	D16.0	D12.0	D13.0	D13.0	D10.5	D10.2	D10.0
258	259	261	263	265	267	269	271	272		
Bright							Steam Tempered		TiAIN	

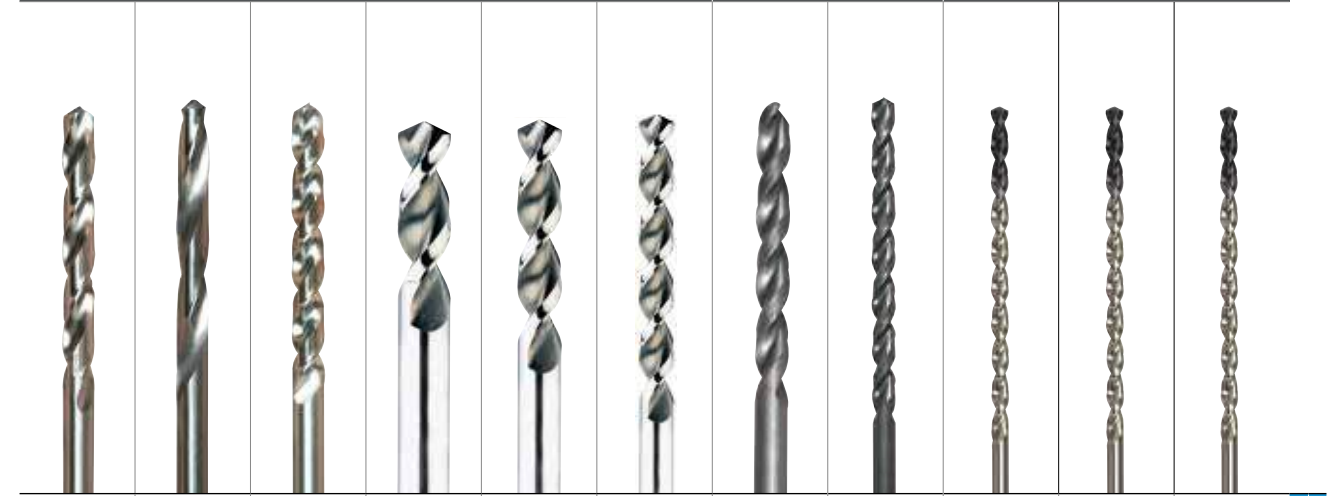

DL109	D1100	D1106	DH100 DL510	DH100 DL508	DH100 DL509	DH100 DL505	DH100 DL504	DH100 DT600	DH100 DT692	DH100 DT693	ISO
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	1
○			○	○	○	○	○	○	○	○	2
○			○	○	○	○	○	○	○	○	3
○			○	○	○	○	○	○	○	○	4
											5
⊙			⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	6 P
○			○	○	○	○	○	○	○	○	7
○			○	○	○	○	○	○	○	○	8
											9
○			○	○	○	○	○	○	○	○	10
											11
⊙											12
○											13 M
○											14
○			○	○	○	○	○	○	○	○	15
○			○	○	○	○	○	○	○	○	16
○			○	○	○	○	○	○	○	○	17 K
○			○	○	○	○	○	○	○	○	18
○			○	○	○	○	○	○	○	○	19
			○	○	○	○	○	○	○	○	20
○		⊙									21
○		⊙									22
○		⊙									23
		⊙									24
											25
											26 N
											27
	⊙										28
○	⊙										29
											30
											31
											32
											33
											34 S
											35
○											36
											37
											38
											39 H
											40
											41

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
STANDARD
LENGTH
SIZE MIN
SIZE MAX
PAGE

STRAIGHT SHANK DRILLS		MORSE TAPER SHANK DRILLS				
DH100 DL608	DH50 DL507	DL205	D1205	D1206	D1209	D1210
DIN341	-	DIN345	DIN345	DIN341	DIN1870/1	DIN1870/2
LONG	EXTRA LONG	JOBBER	JOBBER	LONG	EXTRA LONG	EXTRA LONG
D13.0	D2.0	D13.0	D5.0	D13.0	D13.0	D13.0
D30.0	D13.0	D30.0	D60.0	D30.0	D50.0	D50.0
273	274	288	289	292	293	294

SURFACE TREATMENT



Please visit globalyg1.com/mat for material search

⊙: Excellent ○: Good

ISO	VDI 3323	Material Description	HB	HRc							
P	1	Non-alloy steel	125		⊙	○	⊙	⊙	⊙	⊙	
	2		190 13		⊙		⊙	⊙	⊙	⊙	
	3		250 25		⊙		⊙	⊙	⊙	⊙	
	4		270 28		○		○	○	○	○	
	5	300 32									
	6	Low alloy steel	180 10		⊙		⊙	⊙	⊙	⊙	
	7		275 29		○		○	○	○	○	
	8		300 32		○		○	○	○	○	
	9		350 38								
	10		High alloyed steel, and tool steel	200 15		○		○	○	○	○
	11	325 35									
M	12	Stainless steel	200 15								
	13		240 23								
	14		180 10								
K	15	Grey cast iron	180 10		○		○	○	○	○	
	16		260 26		○		○	○	○	○	
	17	Nodular cast iron	160 3		○		○	○	○	○	
	18		250 25		○		○	○	○	○	
	19		130		○		○	○	○	○	
20	Malleable cast iron	230 21		○		○	○	○	○		
N	21	Aluminum-wrought alloy	60			⊙					
	22		100			⊙					
	23	Aluminum-cast, alloyed	75			○					
	24		90								
	25		130								
	26		110								
	27	Copper and Copper Alloys (Bronze / Brass)	90								
	28		100								
	29						○		○		○
	30	Non Metallic Materials									
S	31	Heat Resistant Super Alloys	200 15								
	32		280 30								
	33		250 25								
	34		350 38								
	35	320 34									
	36	Titanium Alloys	400 Rm								
	37		1050 Rm				○		○		
H	38	Hardened steel	550 55								
	39		630 60								
	40	Hardened Cast Iron	400 42								
	41		550 55								

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
STANDARD
LENGTH
SIZE MIN
SIZE MAX
PAGE

NC-SPOTTING DRILLS					COUNTERSINKS				
D5306 D5307	D5320	D2306 D2321	D2307 D2322	D2320 D2323	C1109 C3109	C1119 C3119	C1136 C3136	C1139 C3139	C1132 C3132
-	-	-	-	-	-	-	DIN334C	DIN335C	-
90°/120°	142°	90°	120°	142°	90°	90°	60°	90°	120°
D6.0	D3.0	D3.0	D3.0/D6.0	D3.0/D6.0	D10.0	D10.0	D6.3	D4.3	D8.0
D20.0	D20.0	D20.0	D20.0/D12.0	D20.0/D12.0	D50.0	D50.0	D25.0	D31.0	D25.0
300	301	302	303	304	434	435	436	437	438

SURFACE TREATMENT



Please visit globalyg1.com/mat for material search

⊙: Excellent ○: Good

ISO	VDI 3323	Material Description	HB	HRc							
P	1	Non-alloy steel	125		⊙	○	⊙	⊙	⊙	○	
	2		190 13		⊙		⊙	⊙	⊙	○	
	3		250 25		⊙		⊙	⊙	⊙	○	
	4		270 28								
	5	300 32									
	6	Low alloy steel	180 10		⊙		⊙	⊙	⊙		
	7		275 29		○		○	○	○		
	8		300 32								
	9		350 38								
	10		High alloyed steel, and tool steel	200 15							
	11	325 35									
M	12	Stainless steel	200 15								
	13		240 23								
	14		180 10								
K	15	Grey cast iron	180 10		⊙		⊙	⊙	⊙	○	
	16		260 26		○		○	○	○	○	
	17	Nodular cast iron	160 3		○		○	○	○	○	
	18		250 25								
	19		130		○		○	○	○	○	
20	Malleable cast iron	230 21		○		○	○	○	○		
N	21	Aluminum-wrought alloy	60								
	22		100								
	23	Aluminum-cast, alloyed	75								
	24		90								
	25		130								
	26		110								
	27	Copper and Copper Alloys (Bronze / Brass)	90								
	28		100								
	29										
	30	Non Metallic Materials									
S	31	Heat Resistant Super Alloys	200 15								
	32		280 30								
	33		250 25								
	34		350 38								
	35	320 34									
	36	Titanium Alloys	400 Rm								
	37		1050 Rm								
H	38	Hardened steel	550 55								
	39		630 60								
	40	Hardened Cast Iron	400 42								
	41		550 55								

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES

D5303 DV303 DV333 DV334 D1303 D1343 D1313 D1353 D1363

HOLETYPE

- - - - - - - - -

FLUTE / FORM TYPE

FORM A FORM A FORM A FORM A FORM A FORM A FORM B FORM B FORM R

SIZE Min

D1.0 D0.5 D1.6 D1.0 D0.5 D0.5 D1.0 D2.0 D0.5

SIZE Max


D6.3 D6.3 D6.3 D5.0 D10.0 D8.0 D6.3 D6.3 D8.0

PAGE

310 311 311 312 313 313 314 314 315

SURFACE TREATMENT

Bright

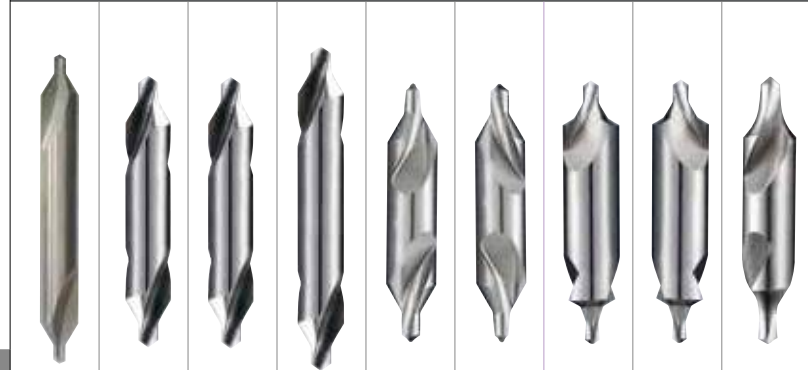

Please visit globalyg1.com/mat for material search

⊙ : Excellent ○ : Good

ISO	VDI 3323	Material Description	HB	HRC	D5303	DV303	DV333	DV334	D1303	D1343	D1313	D1353	D1363	
P	1	Non-alloy steel	125		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	2		190	13	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	3		250	25	⊙	○	○	○	○	○	○	○	○	
	4		270	28										
	5	300	32											
	6	180	10	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	M	7	Low alloy steel	275	29	○	○	○	○	○	○	○	○	○
		8		300	32									
		9		350	38									
		10		High alloyed steel, and tool steel	200	15								
	K	11	Stainless steel	325	35	○	○	○	○	○	○	○	○	○
12		200		15	○	○	○	○	○	○	○	○	○	
13		240		23										
N	14	180	10											
	K	15	Grey cast iron	180	10	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
		16	260	26	○	○	○	○	○	○	○	○	○	
		17	Nodular cast iron	160	3	○	○	○	○	○	○	○	○	
18		250	25											
S	19	Malleable cast iron	130		○	○	○	○	○	○	○	○		
	20	230	21											
H	21	Aluminum-wrought alloy	60											
	22	100												
	N	23	Aluminum-cast, alloyed	75										
		24		90										
		25		130										
	S	26	Copper and Copper Alloys	110										
		27	(Bronze / Brass)	90										
H	28	100												
	29	Non Metallic Materials												
	30													
S	31	Heat Resistant Super Alloys	200	15										
	32		280	30										
	33		250	25										
	34		350	38										
	35		320	34										
H	36	Titanium Alloys	400 Rm											
	37		1050 Rm											
H	38	Hardened steel	550	55										
	39		630	60										
	40		Chilled Cast Iron	400	42									
	41	Hardened Cast Iron	550	55										

CENTER DRILLS

REAMERS

D1373 DV383 K4101 K4111 K1143 K1153 K2101 K2111 K2121 K2102 K2112 K21B1

D1373	DV383	K4101	K4111	K1143	K1153	K2101	K2111	K2121	K2102	K2112	K21B1
-	-										
FORM R	FORM R	Straight	LH Spiral	Straight	LH Spiral	Straight	LH Spiral	LH Spiral (Quick Spiral)	Straight	LH Spiral	LH Spiral
D0.8	D1.6	D2.0	D2.0	D2.0	D2.0	D2.0	D2.0	D4.0	D10.0	D10.0	D2.0
D5.0	D6.3	D20.0	D20.0	D60.0	D60.0	D20.0	D20.0	D20.0	D50.0	D50.0	D20.0
315	316	406	407	408	410	412	414	416	417	419	421

Bright Bright



⊙	⊙	⊙	⊙	○	○	⊙	⊙	○	○	⊙	⊙	1
⊙	⊙	⊙	⊙	○	○	⊙	⊙	○	○	⊙	⊙	2
○	○	⊙	⊙			○	○			○	○	3
		○	○			○	○			○	○	4
		○	○			○	○			○	○	5
⊙	⊙	⊙	⊙	○	○	⊙	⊙	○	○	⊙	⊙	6 P
○	○	⊙	⊙			○	○			○	○	7
		○	○									8
												9
		○	○			○	○			○	○	10
○	○	○	○			○	○			○	○	11
		○	○			○	○			○	○	12
		○	○			○	○			○	○	13 M
		○	○			○	○			○	○	14
⊙	⊙	⊙	⊙			○	○			○	○	15
○	○	○	○			○	○			○	○	16
○	○	⊙	⊙			○	○			○	○	17 K
		○	○			○	○			○	○	18
○	○	⊙	⊙			○	○			○	○	19
		○	○			○	○			○	○	20
		○	○			○	○			○	○	21
		○	○			○	○			○	○	22
		○	○			○	○			⊙	○	23
		○	○			○	○			⊙	○	24
												25 N
		○	○			○	○			○	○	26
		○	○			○	○			⊙	○	27
		○	○			○	○			○	○	28
												29
												30
												31
												32
												33
												34 S
												35
												36
												37
												38
												39
												40
												41

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
TYPE
PILOT DIA.
CUTTER DIA.
PAGE

COUNTERBORES

EL950

MEDIUM	FINE	BEOFRE THREADING
3.4~14.0	3.2~13.0	2.5~10.2
6.0~20.0		

443

SURFACE TREATMENT

Bright




Please visit globalyg1.com/mat for material search
◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	HB	HRc	
P	1	Non-alloy steel	125		◎
	2		190	13	◎
	3		250	25	◎
	4		270	28	◎
	5	300	32	◎	
	6	180	10	◎	
	7	Low alloy steel	275	29	◎
	8		300	32	◎
	9		350	38	○
	10	High alloyed steel, and tool steel	200	15	◎
	11		325	35	○
M	12	Stainless steel	200	15	
	13		240	23	
	14		180	10	
K	15	Grey cast iron	180	10	
	16		260	26	
	17	Nodular cast iron	160	3	
	18		250	25	
	19		130		
20	Malleable cast iron	230	21		
N	21	Aluminum-wrought alloy	60		○
	22		100		○
	23		75		○
	24	Aluminum-cast, alloyed	90		○
	25		130		
	26	Copper and Copper Alloys (Bronze / Brass)	110		
	27		90		
	28		100		
	29	Non Metallic Materials			
	30				
S	31	Heat Resistant Super Alloys	200	15	
	32		280	30	
	33		250	25	
	34		350	38	
	35		320	34	
	36		400 Rm		
37	1050 Rm				
H	38	Hardened steel	550	55	
	39		630	60	
	40		400	42	
	41		550	55	



Leading Through Innovation

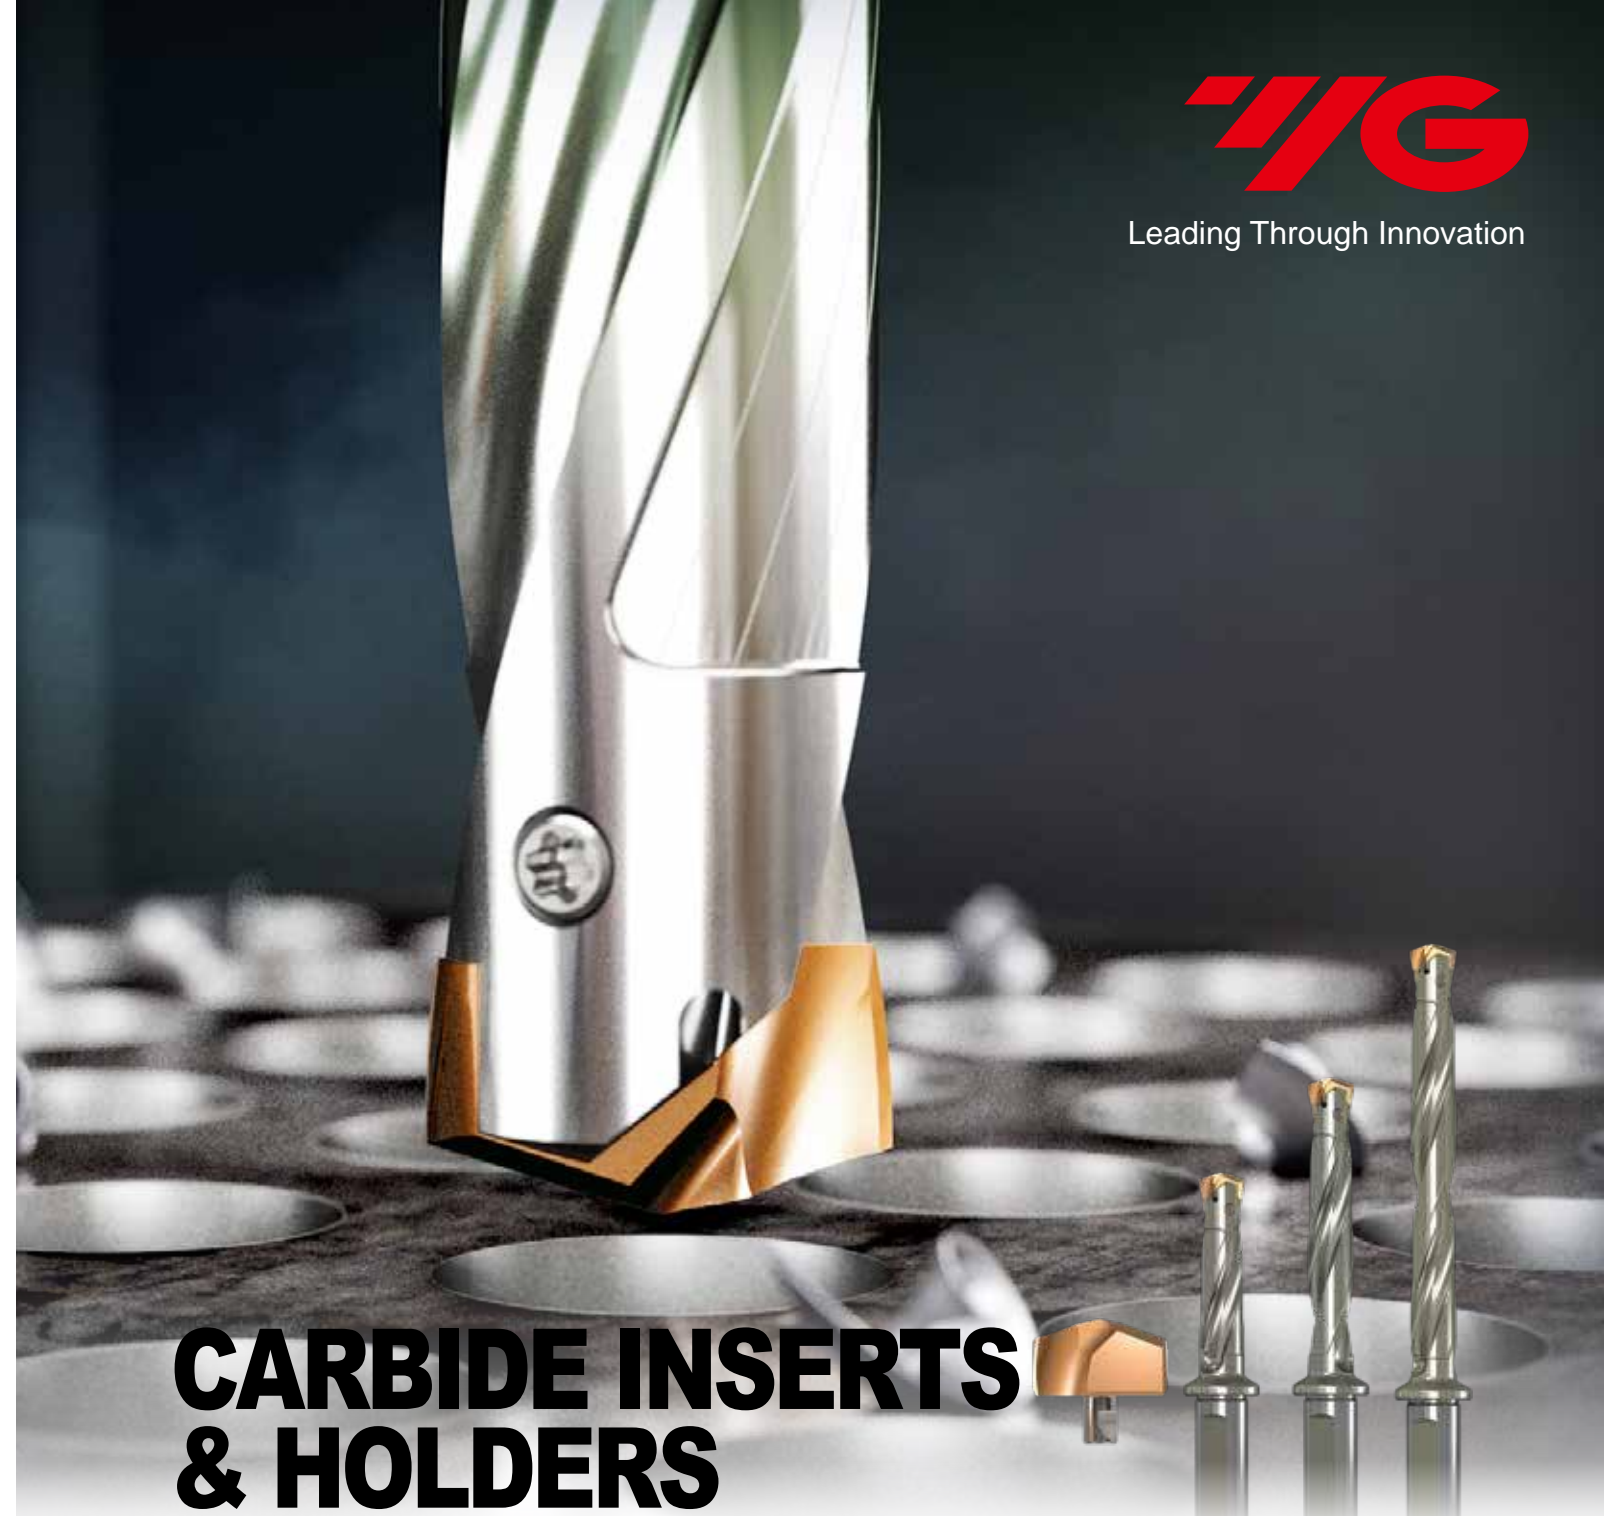

CARBIDE INSERTS & HOLDERS

i-ONE DRILLS
i-One Drills

- High Performance Exchangeable for General Steels and Cast Iron
- Leistungsstarke, austauschbare Bohrwerkzeuge für allgemeine Stähle und Gusseisen

SELECTION GUIDE




SERIES	Y101H	Y121H	Y141H	Y161H
SIZE MIN	10.00	12.00	14.00	16.00
SIZE MAX	11.91	13.90	15.90	17.90
PAGE	38	39	40	41

SURFACE TREATMENT H-Coating

CARBIDE INSERTS & HOLDERS

i-ONE DRILLS

High Performance Exchangeable
for General Steels and Cast Iron

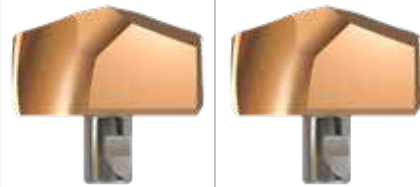

Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good


Recommended cutting conditions : P.48

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc					
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎	◎	
	2		About 0.45% C	Annealed	190	13	◎	◎	◎	◎	
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎	◎	
	4		About 0.75% C	Annealed	270	28	◎	◎	◎	◎	
	5		About 0.75% C	Quenched & Tempered	300	32	◎	◎	◎	◎	
	6	Low alloy steel		Annealed	180	10	◎	◎	◎	◎	
	7			Quenched & Tempered	275	29	◎	◎	◎	◎	
	8			Quenched & Tempered	300	32	◎	◎	◎	◎	
	9			Quenched & Tempered	350	38	◎	◎	◎	◎	
	10		High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎	◎
	11				Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15					
	13		Martensitic	Quenched & Tempered	240	23					
	14		Austenitic10		180	10					
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)		260	26	◎	◎	◎	◎	
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎	◎	
	18		Pearlitic		250	25	◎	◎	◎	◎	
	19		Ferritic		130		◎	◎	◎	◎	
20	Malleable cast iron	Pearlitic		230	21	◎	◎	◎	◎		
N	21	Aluminum-wrought alloy	Not Curable		60						
	22		Curable Hardened		100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75						
	24		≤ 12% Si, Curable Hardened		90						
	25		> 12% Si, Not Curable		130						
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110						
	27		CuZn, CuSnZn (Brass)		90						
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper		100						
	29		Duroplastic, Fiber Reinforced Plastic								
	30		Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32		Cured	280	30						
	33		Annealed	250	25						
	34		Ni or Co Based	Cured	350	38					
	35		Cast	320	34						
	36	Titanium Alloys	Pure Titanium		400 Rm						
37		Alpha + Beta Alloys	Hardened	1050 Rm							
H	38	Hardened steel	Hardened		550	55					
	39		Hardened		630	60					
	40		Cast		400	42					
		41	Hardened		550	55					

Y181H	Y201H	Y221H	Y241H	Y261H	Y281H	Y301H	Y321H			
18.00	20.00	22.00	24.00	26.00	28.00	30.00	32.00	ZD*3	ZD*5	ZD*8
19.90	21.90	23.90	25.90	27.78	29.77	31.75	33.73			
42	43	44	45	46	46	47	47			

H-Coating

3XD 5XD 8XD

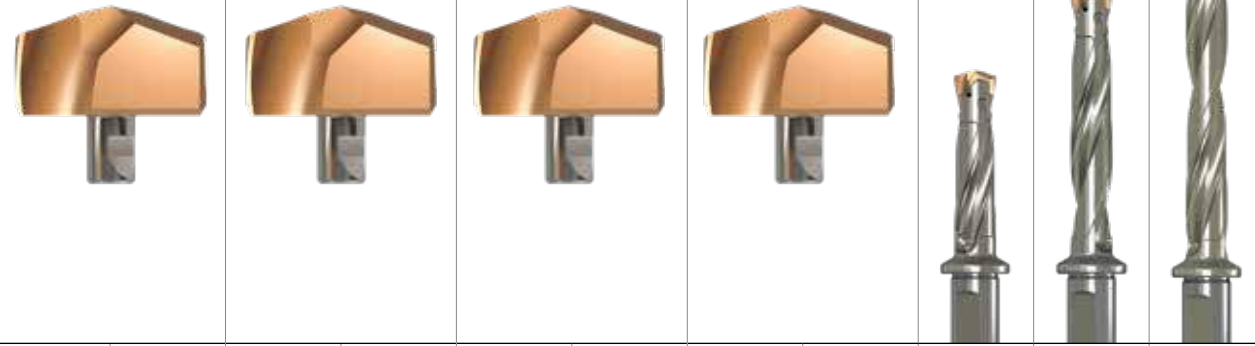

◎	◎	◎	◎	◎	◎	◎	◎				1
◎	◎	◎	◎	◎	◎	◎	◎				2
◎	◎	◎	◎	◎	◎	◎	◎				3
◎	◎	◎	◎	◎	◎	◎	◎				4
◎	◎	◎	◎	◎	◎	◎	◎				5
◎	◎	◎	◎	◎	◎	◎	◎				6
◎	◎	◎	◎	◎	◎	◎	◎				7
◎	◎	◎	◎	◎	◎	◎	◎				8
◎	◎	◎	◎	◎	◎	◎	◎				9
◎	◎	◎	◎	◎	◎	◎	◎				10
◎	◎	◎	◎	◎	◎	◎	◎				11
											12
											13
											14
◎	◎	◎	◎	◎	◎	◎	◎				15
◎	◎	◎	◎	◎	◎	◎	◎				16
◎	◎	◎	◎	◎	◎	◎	◎				17
◎	◎	◎	◎	◎	◎	◎	◎				18
◎	◎	◎	◎	◎	◎	◎	◎				19
◎	◎	◎	◎	◎	◎	◎	◎				20
											21
											22
											23
											24
											25
											26
											27
											28
											29
											30
											31
											32
											33
											34
											35
											36
											37
											38
											39
											40
											41

i-ONE DRILL INSERTS & HOLDERS


● i-ONE DRILL EINSÄTZE UND HALTER
 ○ PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
 □ INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
 ▶ For carbon steels, alloy steels and cast iron.
 ▶ Holder length: 3xD, 5xD, 8xD

- Benefits
 ▶ Secure and quick clamping system.
 ▶ High performance with cost efficiency.
 ▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
 ▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
 ▶ Halterlänge: 3xD, 5xD, 8xD

- Vorteile
 ▶ Sicheres und schnelles Spannsystem.
 ▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
 ▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

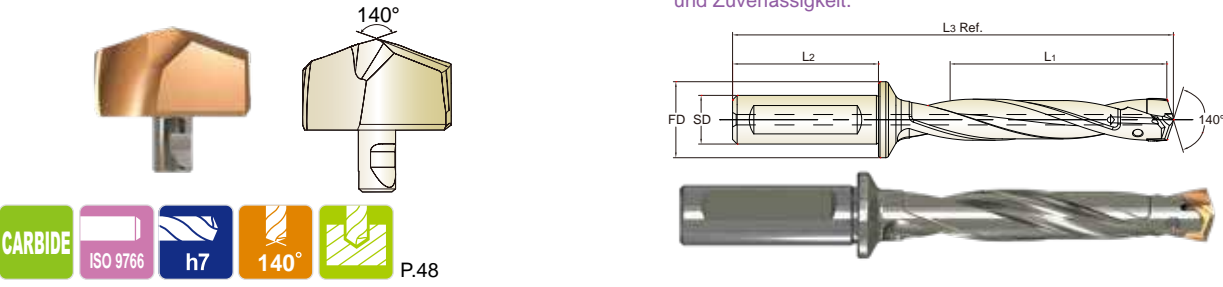

Unit : mm

Series Range (mm)	Insert EDP No. H-Coating	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.	
		dec.	frac.	mm					L1	L3 Ref.			
S10 Ø10.00 to Ø11.99	Y101H1000	0.3937		10.00	ZD10003016 ZD10005016 ZD10008016	16	48	23	3D	31.5	103.0	TX1011P5	
	Y101H1010	0.3976		10.10					5D	52.5			123.0
	Y101H1020	0.4016		10.20					8D	84.0			153.0
	Y101H1030	0.4055		10.30									
	Y101H1032	0.4063	13/32	10.32									
	Y101H1040	0.4094		10.40	ZD10503016 ZD10505016 ZD10508016	16	48	23	3D	33.0	104.0		
	Y101H1050	0.4134		10.50					5D	55.0			125.0
	Y101H1060	0.4173		10.60					8D	88.0			156.5
	Y101H1070	0.4213		10.70									
	Y101H1072	0.4219	27/64	10.72									
	Y101H1080	0.4252		10.80	ZD11003016 ZD11005016 ZD11008016	16	48	23	3D	34.5	105.0		
	Y101H1090	0.4291		10.90					5D	57.5			127.0
	Y101H1100	0.4331		11.00					8D	92.0			160.0
	Y101H1110	0.4370		11.10									
	Y101H1111	0.4375	7/16	11.11									
Y101H1120	0.4409		11.20	ZD11503016 ZD11505016 ZD11508016	16	48	23	3D	36.0	106.0			
Y101H1130	0.4449		11.30					5D	60.0			129.0	
Y101H1140	0.4488		11.40					8D	96.0			163.5	
Y101H1150	0.4528		11.50										
Y101H1151	0.4531	29/64	11.51										
Y101H1160	0.4567		11.60	ZD11503016 ZD11505016 ZD11508016	16	48	23	3D	36.0	106.0			
Y101H1170	0.4606		11.70					5D	60.0			129.0	
Y101H1180	0.4646		11.80					8D	96.0			163.5	
Y101H1190	0.4685		11.90										
Y101H1191	0.4688	15/32	11.91										

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P																				M					K															
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Duplex	Grey cast iron	Nodular cast iron		Malleable cast iron																						
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																																									
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	130	230	130	230	130	130	230	130	230	130	130	230	130	230	130	130	230	130	230	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

i-ONE DRILL INSERTS & HOLDERS


● i-ONE DRILL EINSÄTZE UND HALTER
 ○ PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
 □ INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
 ▶ For carbon steels, alloy steels and cast iron.
 ▶ Holder length: 3xD, 5xD, 8xD

- Benefits
 ▶ Secure and quick clamping system.
 ▶ High performance with cost efficiency.
 ▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
 ▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
 ▶ Halterlänge: 3xD, 5xD, 8xD

- Vorteile
 ▶ Sicheres und schnelles Spannsystem.
 ▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
 ▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

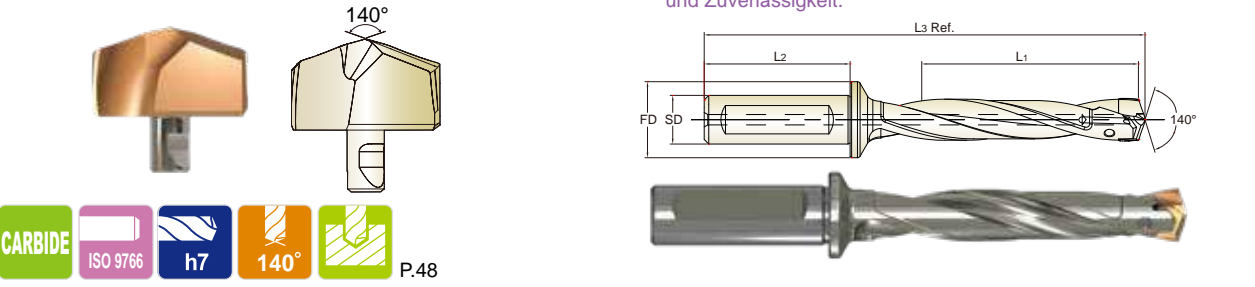

Unit : mm

Series Range (mm)	Insert EDP No. H-Coating	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.	
		dec.	frac.	mm					L1	L3 Ref.			
S12 Ø12.00 to Ø13.99	Y121H1200	0.4724		12.00	ZD12003016 ZD12005016 ZD12008016	16	48	23	3D	37.5	109.8	TX1213P5	
	Y121H1210	0.4764		12.10					5D	62.5			133.8
	Y121H1220	0.4803		12.20					8D	100.0			169.8
	Y121H1230	0.4844	31/64	12.30									
	Y121H1240	0.4882		12.40									
	Y121H1250	0.4921		12.50	ZD12503016 ZD12505016 ZD12508016	16	48	23	3D	39.0	110.8		
	Y121H1260	0.4961		12.60					5D	65.0			135.8
	Y121H1270	0.5000	1/2	12.70					8D	104.0			173.3
	Y121H1280	0.5039		12.80									
	Y121H1290	0.5079		12.90									
	Y121H1300	0.5118		13.00	ZD13003016 ZD13005016 ZD13008016	16	48	23	3D	40.5	112.8		
	Y121H1310	0.5156	33/64	13.10					5D	67.5			138.8
	Y121H1320	0.5197		13.20					8D	108.0			177.8
	Y121H1330	0.5236		13.30									
	Y121H1340	0.5276		13.40									
	Y121H1349	0.5313	17/32	13.49	ZD13503016 ZD13505016 ZD13508016	16	48	23	3D	42.0	113.8		
	Y121H1350	0.5315		13.50					5D	70.0			140.8
	Y121H1360	0.5354		13.60					8D	112.0			181.3
	Y121H1370	0.5394		13.70									
	Y121H1380	0.5433		13.80									
Y121H1389	0.5469	35/64	13.89										
Y121H1390	0.5472		13.90										

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good


ISO	P																				M					K															
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Duplex	Grey cast iron	Nodular cast iron		Malleable cast iron																						
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																																									
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	130	230	130	230	130	130	230	130	230	130	130	230	130	230	130	130	230	130	230	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

i-ONE DRILL INSERTS & HOLDERS

- i-ONE DRILL EINSÄTZE UND HALTER
- PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
- ◇ INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
 - ▶ For carbon steels, alloy steels and cast iron.
 - ▶ Holder length: 3xD, 5xD, 8xD
- Benefits
 - ▶ Secure and quick clamping system.
 - ▶ High performance with cost efficiency.
 - ▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
 - ▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
 - ▶ Halterlänge: 3xD, 5xD, 8xD
- Vorteile
 - ▶ Sicheres und schnelles Spannsystem.
 - ▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
 - ▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

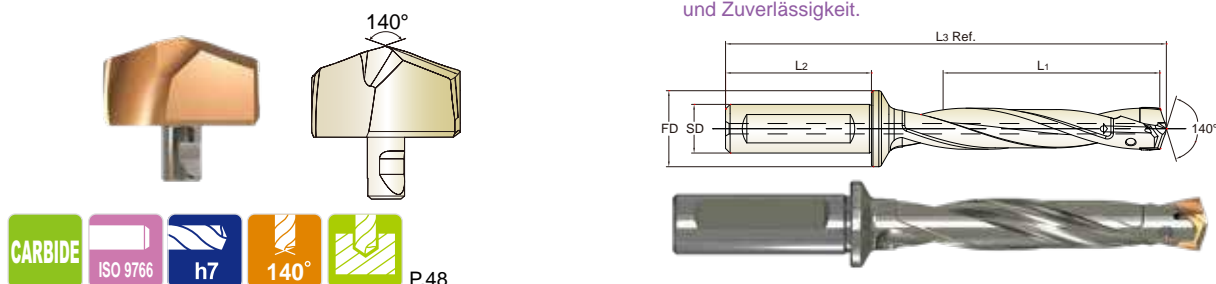

Unit : mm

Series Range (mm)	Insert EDP No. H-Coating	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.	
		dec.	frac.	mm					L1	L3 Ref.			
S14 Ø14.00 to Ø15.99	Y141H1400	0.5512		14.00	ZD14003016	16	48	23	3D	43.5	116.3	TX1415P7	
	Y141H1410	0.5551		14.10					5D	72.5			144.3
	Y141H1420	0.5591		14.20					8D	116.0			186.3
	Y141H1429	0.5625	9/16	14.29									
	Y141H1430	0.5630		14.30									
	Y141H1440	0.5669		14.40									
	Y141H1450	0.5709		14.50									
	Y141H1460	0.5748		14.60	ZD14503016	16	48	23	3D	45.0	118.3		
	Y141H1468	0.5781	37/64	14.68					5D	75.0			147.3
	Y141H1470	0.5787		14.70					8D	120.0			190.8
	Y141H1480	0.5827		14.80									
	Y141H1490	0.5866		14.90									
	Y141H1500	0.5906		15.00	ZD15003016	16	48	23	3D	46.5	120.3		
	Y141H1508	0.5938	19/32	15.08					5D	77.5			150.3
	Y141H1510	0.5945		15.10					8D	124.0			195.3
	Y141H1520	0.5984		15.20									
	Y141H1530	0.6024		15.30									
Y141H1540	0.6063		15.40	ZD15503016	16	48	23	3D	48.0	121.3			
Y141H1548	0.6094	39/64	15.48					5D	80.0		152.3		
Y141H1550	0.6102		15.50					8D	128.0		198.8		
Y141H1560	0.6142		15.60										
Y141H1570	0.6181		15.70										
Y141H1580	0.6220		15.80										
Y141H1588	0.6250	5/8	15.88										
Y141H1590	0.6260		15.90										

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Duplex		Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	


ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

i-ONE DRILL INSERTS & HOLDERS

- i-ONE DRILL EINSÄTZE UND HALTER
- PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
- ◇ INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
 - ▶ For carbon steels, alloy steels and cast iron.
 - ▶ Holder length: 3xD, 5xD, 8xD
- Benefits
 - ▶ Secure and quick clamping system.
 - ▶ High performance with cost efficiency.
 - ▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
 - ▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
 - ▶ Halterlänge: 3xD, 5xD, 8xD
- Vorteile
 - ▶ Sicheres und schnelles Spannsystem.
 - ▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
 - ▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

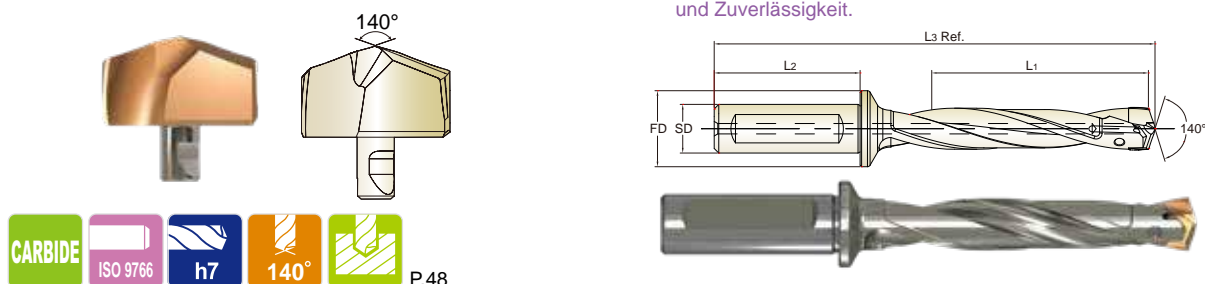

Unit : mm

Series Range (mm)	Insert EDP No. H-Coating	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.	
		dec.	frac.	mm					L1	L3 Ref.			
S16 Ø16.00 to Ø17.99	Y161H1600	0.6299		16.00	ZD16003020	20	50	25			127.0	TX1617P7	
	Y161H1609	0.6335		16.09					3D	51.0			
	Y161H1610	0.6339		16.10					5D	85.0			160.0
	Y161H1620	0.6378		16.20					8D	136.0			209.5
	Y161H1627	0.6406	41/64	16.27									
	Y161H1630	0.6417		16.30									
	Y161H1640	0.6457		16.40									
	Y161H1650	0.6496		16.50									
	Y161H1660	0.6535		16.60									
	Y161H1667	0.6563	21/32	16.67									
	Y161H1670	0.6575		16.70									
	Y161H1680	0.6614		16.80									
	Y161H1690	0.6654		16.90									
	Y161H1700	0.6693		17.00									
	Y161H1707	0.6719	43/64	17.07									
	Y161H1710	0.6732		17.10									
	Y161H1720	0.6772		17.20									
	Y161H1730	0.6811		17.30									
	Y161H1740	0.6850		17.40					ZD17003020	20			50
Y161H1746	0.6875	11/16	17.46	5D	90.0	165.0							
Y161H1750	0.6890		17.50	8D	144.0	217.5							
Y161H1760	0.6929		17.60										
Y161H1770	0.6969		17.70										
Y161H1780	0.7008		17.80										
Y161H1786	0.7031	45/64	17.86										
Y161H1790	0.7047		17.90										

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Duplex		Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					



Y181H SERIES

i-ONE DRILL INSERTS & HOLDERS

i-ONE DRILL EINSÄTZE UND HALTER, PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL, INSERTI & PORTAINSERTI i-ONE DRILL

Applications: For carbon steels, alloy steels and cast iron. Holder length: 3xD, 5xD, 8xD. Benefits: Secure and quick clamping system, High performance with cost efficiency, Multi-layered coating delivers outstanding productivity and reliability.

Anwendungen: Für Kohlenstoffstähle, legierte Stähle und Gusseisen. Halterlänge: 3xD, 5xD, 8xD. Vorteile: Sicheres und schnelles Spannsystem, Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz, Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

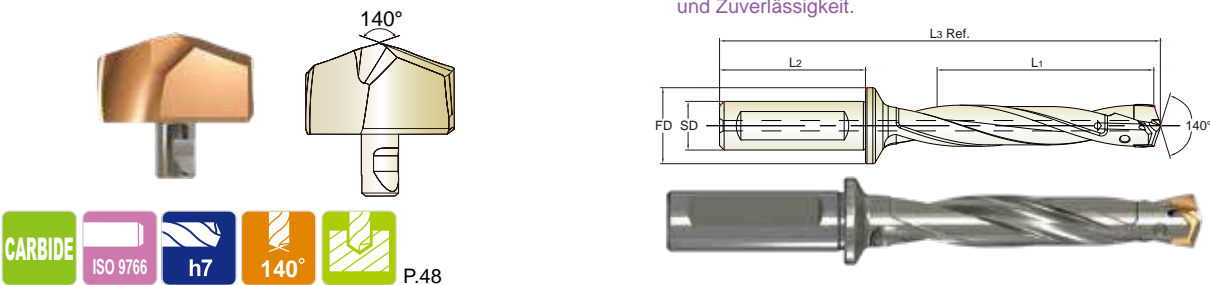


Table with 13 columns: Series Range, Insert EDP No., Insert O.D., Holder EDP No., Shank Dia., Shank Length, Flange Dia., Drilling Depth, Overall Length, Unit: mm, Screw No. Includes rows for S18 and S20 series.

Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

Material compatibility table with columns for ISO, Material Description, and various material groups (P, M, K, N, S, H) with recommended drill numbers.



Y201H SERIES

i-ONE DRILL INSERTS & HOLDERS

i-ONE DRILL EINSÄTZE UND HALTER, PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL, INSERTI & PORTAINSERTI i-ONE DRILL

Applications: For carbon steels, alloy steels and cast iron. Holder length: 3xD, 5xD, 8xD. Benefits: Secure and quick clamping system, High performance with cost efficiency, Multi-layered coating delivers outstanding productivity and reliability.

Anwendungen: Für Kohlenstoffstähle, legierte Stähle und Gusseisen. Halterlänge: 3xD, 5xD, 8xD. Vorteile: Sicheres und schnelles Spannsystem, Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz, Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

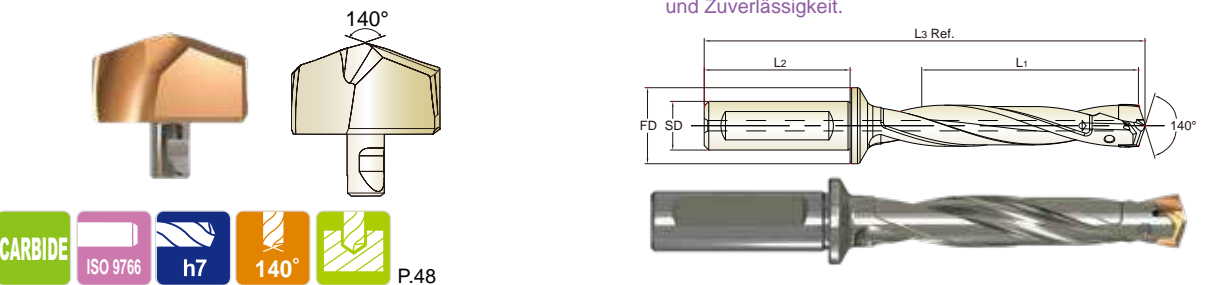


Table with 13 columns: Series Range, Insert EDP No., Insert O.D., Holder EDP No., Shank Dia., Shank Length, Flange Dia., Drilling Depth, Overall Length, Unit: mm, Screw No. Includes rows for S20 series.

Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

Material compatibility table with columns for ISO, Material Description, and various material groups (P, M, K, N, S, H) with recommended drill numbers.

HSS

HSS



Y221H SERIES




Y241H SERIES

i-ONE DRILL INSERTS & HOLDERS

- i-ONE DRILL EINSÄTZE UND HALTER
- PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
- INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
▶ For carbon steels, alloy steels and cast iron.
▶ Holder length: 3xD, 5xD, 8xD
- Benefits
▶ Secure and quick clamping system.
▶ High performance with cost efficiency.
▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
▶ Halterlänge: 3xD, 5xD, 8xD
- Vorteile
▶ Sicheres und schnelles Spannsystem.
▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

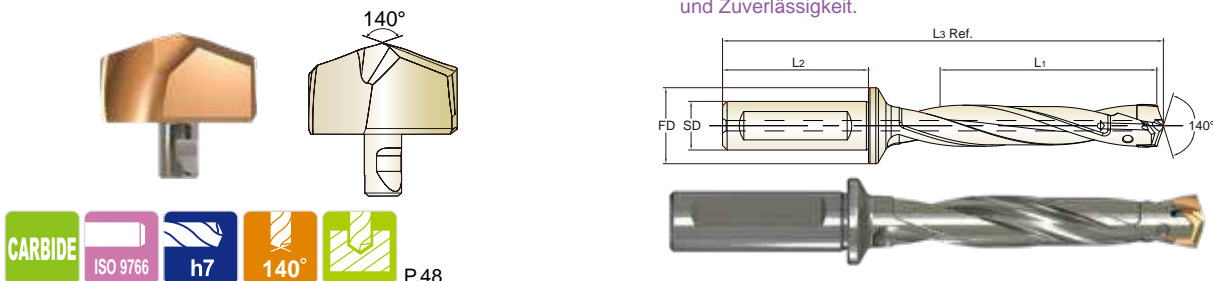


i-ONE DRILL INSERTS & HOLDERS

- i-ONE DRILL EINSÄTZE UND HALTER
- PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL
- INSERTI & PORTAINSERTI i-ONE DRILL

- Applications
▶ For carbon steels, alloy steels and cast iron.
▶ Holder length: 3xD, 5xD, 8xD
- Benefits
▶ Secure and quick clamping system.
▶ High performance with cost efficiency.
▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
▶ Halterlänge: 3xD, 5xD, 8xD
- Vorteile
▶ Sicheres und schnelles Spannsystem.
▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

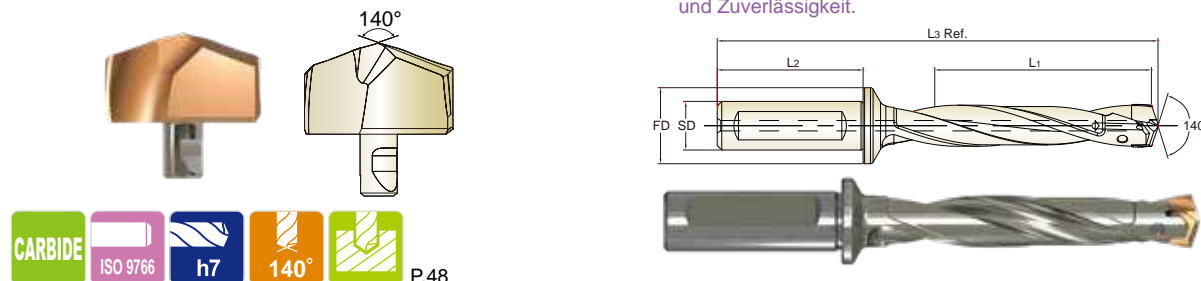

Unit : mm

Series Range (mm)	Insert EDP No. H-Coating	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.
		dec.	frac.	mm					L1	L3 Ref.		
S22 Ø22.00 to Ø23.99	Y221H2200	0.8661		22.00	ZD22003025 ZD22005025 ZD22008025	25	56	32	3D	69.0	153.4	TX2223P9
	Y221H2210	0.8701		22.10					5D	115.0	198.4	
	Y221H2220	0.8740		22.20					8D	184.0	265.9	
	Y221H2223	0.8750	7/8	22.23								
	Y221H2230	0.8780		22.30								
	Y221H2240	0.8819		22.40								
	Y221H2250	0.8858		22.50								
	Y221H2260	0.8898		22.60								
	Y221H2262	0.8906	57/64	22.62								
	Y221H2270	0.8937		22.70								
	Y221H2280	0.8976		22.80								
	Y221H2290	0.9016		22.90								
	Y221H2300	0.9055		23.00	ZD23003025 ZD23005025 ZD23008025	25	56	32	3D	72.0	157.4	TX2324P9
Y221H2302	0.9063	29/32	23.02	5D					120.0	204.4		
Y221H2310	0.9094		23.10	8D					192.0	274.9		
Y221H2320	0.9134		23.20									
Y221H2330	0.9173		23.30									
Y221H2340	0.9213		23.40									
Y221H2342	0.9219	59/64	23.42									
Y221H2350	0.9252		23.50									
Y221H2360	0.9291		23.60									
Y221H2370	0.9331		23.70									
Y221H2380	0.9370		23.80									
Y221H2381	0.9375	15/16	23.81									
Y221H2390	0.9409		23.90									

Unit : mm

Series Range (mm)	Insert EDP No. H-Coating	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.
		dec.	frac.	mm					L1	L3 Ref.		
S24 Ø24.00 to Ø25.99	Y241H2400	0.9449		24.00	ZD24003032 ZD24005032 ZD24008032	32	60	37	3D	75.0	165.8	TX2425P10
	Y241H2410	0.9488		24.10					5D	125.0	214.8	
	Y241H2420	0.9528		24.20					8D	200.0	288.3	
	Y241H2421	0.9531	61/64	24.21								
	Y241H2430	0.9567		24.30								
	Y241H2440	0.9606		24.40								
	Y241H2450	0.9646		24.50								
	Y241H2460	0.9685		24.60								
	Y241H2461	0.9688	31/32	24.61								
	Y241H2470	0.9724		24.70								
	Y241H2480	0.9764		24.80								
	Y241H2490	0.9803		24.90								
	Y241H2500	0.9844	63/64	25.00					ZD25003032 ZD25005032 ZD25008032	32	60	
	Y241H2510	0.9882		25.10	5D	130.0	221.8					
	Y241H2520	0.9921		25.20	8D	208.0	298.3					
	Y241H2530	0.9961		25.30								
	Y241H2540	1.0000	1	25.40								
	Y241H2550	1.0039		25.50								
	Y241H2560	1.0079		25.60								
	Y241H2567	1.0106		25.67								
	Y241H2570	1.0118		25.70								
Y241H2580	1.0156	1-1/64	25.80									
Y241H2590	1.0197		25.90									

▶ Other diameters of insert and shank types of holder are available upon request.

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P								M						K					
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel		Stainless steel		Duplex	Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

◎ : Excellent ○ : Good

ISO Material Description	P								M						K					
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel		Stainless steel		Duplex	Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					




Y261H SERIES
Y281H SERIES

i-ONE DRILL INSERTS & HOLDERS

● **i-ONE DRILL EINSÄTZE UND HALTER**
 ○ **PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL**
 ○ **INSERTI & PORTAINSERTI i-ONE DRILL**

- Applications
 ▶ For carbon steels, alloy steels and cast iron.
 ▶ Holder length: 3xD, 5xD, 8xD
- Benefits
 ▶ Secure and quick clamping system.
 ▶ High performance with cost efficiency.
 ▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
 ▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
 ▶ Halterlänge: 3xD, 5xD, 8xD
- Vorteile
 ▶ Sicheres und schnelles Spannsystem.
 ▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
 ▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

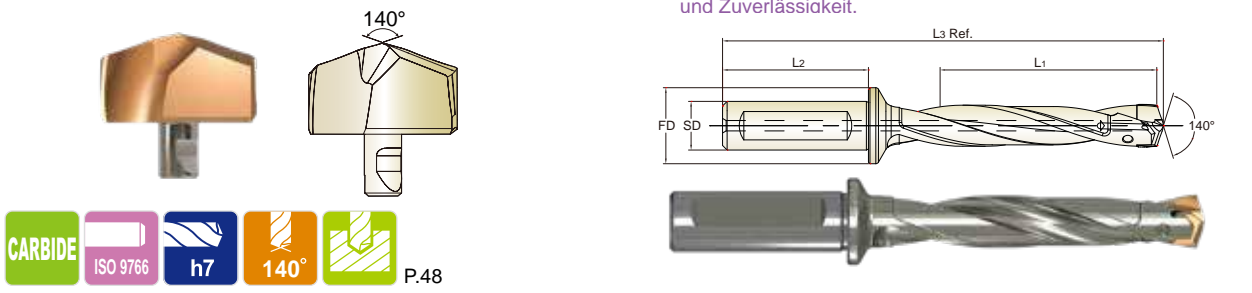

Unit : mm

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth L1	Overall Length L3 Ref.	Screw No.		
		dec.	frac.	mm									
S26 Ø26.00 to Ø27.99	Y261H2600	1.0236	1-1/32	26.00	ZD26003032	32	60	37	3D 81.0	172.2	TX2627P10		
	Y261H2619	1.0313	1-1/32	26.19					5D 135.0				
	Y261H2650	1.0433		26.50					8D 216.0				
	Y261H2659	1.0469	1-3/64	26.59	ZD27003032	32	60	37	3D 84.0	175.2	TX2728P10		
	Y261H2699	1.0625	1-1/16	26.99					5D 140.0				
	Y261H2700	1.0630		27.00					8D 224.0				
	Y261H2738	1.0781	1-5/64	27.38					3D 87.0			179.2	TX2829P10
	Y261H2750	1.0827		27.50					5D 145.0				
	Y261H2778	1.0938	1-3/32	27.78					8D 232.0				
	Y281H2800	1.1024		28.00					3D 90.0				
Y281H2818	1.1094	1-7/64	28.18	5D 150.0									
Y281H2850	1.1220		28.50	8D 240.0									
Y281H2858	1.1250	1-1/8	28.58	3D 90.0	201.2	TX3334P15							
Y281H2897	1.1406	1-9/64	28.97	5D 170.0									
Y281H2900	1.1417		29.00	8D 272.0									
Y281H2937	1.1563	1-5/32	29.37										
Y281H2950	1.1614		29.50										
Y281H2977	1.1719	1-11/64	29.77										

▶ Other diameters of insert and shank types of holder are available upon request.




Y301H SERIES
Y321H SERIES

i-ONE DRILL INSERTS & HOLDERS

● **i-ONE DRILL EINSÄTZE UND HALTER**
 ○ **PLAQUETTES ET PORTE-PLAQUETTE i-ONE DRILL**
 ○ **INSERTI & PORTAINSERTI i-ONE DRILL**

- Applications
 ▶ For carbon steels, alloy steels and cast iron.
 ▶ Holder length: 3xD, 5xD, 8xD
- Benefits
 ▶ Secure and quick clamping system.
 ▶ High performance with cost efficiency.
 ▶ Multi-layered coating delivers outstanding productivity and reliability.

- Anwendungen
 ▶ Für Kohlenstoffstähle, legierte Stähle und Gusseisen.
 ▶ Halterlänge: 3xD, 5xD, 8xD
- Vorteile
 ▶ Sicheres und schnelles Spannsystem.
 ▶ Hohe Leistungsfähigkeit bei gleichzeitiger Kosteneffizienz.
 ▶ Mehrschichtige Beschichtung bietet hervorragende Produktivität und Zuverlässigkeit.

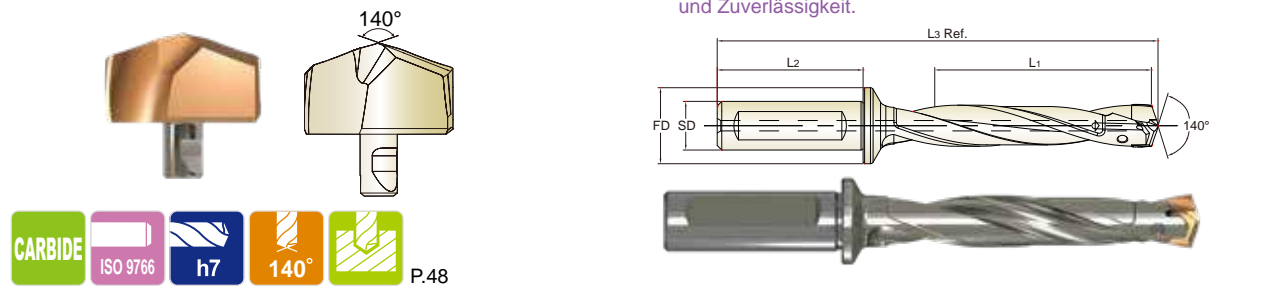

Unit : mm

Series Range	Insert EDP No.	Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth L1	Overall Length L3 Ref.	Screw No.		
		dec.	frac.	mm									
S30 Ø30.00 to Ø31.99	Y301H3000	1.1811		30.00	ZD30003032	32	60	37	3D 93.0	187.0	TX3031P15		
	Y301H3016	1.1875	1-3/16	30.16					5D 155.0				
	Y301H3050	1.2008		30.50					8D 248.0				
	Y301H3056	1.2031	1-13/64	30.56	ZD31003032	32	60	37	3D 96.0	191.0	TX3132P15		
	Y301H3096	1.2188	1-7/32	30.96					5D 160.0				
	Y301H3100	1.2205		31.00					8D 256.0				
	Y301H3135	1.2344	1-15/64	31.35					3D 99.0			197.2	TX3233P15
	Y301H3150	1.2402		31.50					5D 165.0				
	Y301H3175	1.2500	1-1/4	31.75					8D 264.0				
	Y321H3200	1.2598		32.00					3D 102.0				
Y321H3215	1.2656	1-17/64	32.15	5D 170.0									
Y321H3250	1.2795		32.50	8D 272.0									
Y321H3254	1.2813	1-9/32	32.54										
Y321H3294	1.2969	1-19/64	32.94										
Y321H3300	1.2992		33.00										
Y321H3334	1.3125	1-5/16	33.34										
Y321H3350	1.3189		33.50										
Y321H3373	1.3281	1-21/64	33.73										

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Duplex	Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S								H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25 <th>26</th> <th>27</th> <th>28</th> <th>29</th> <th>30 <th>31</th><th>32</th><th>33</th><th>34</th><th>35 <th>36</th><th>37 <th>38</th><th>39</th><th>40</th><th>41 </th></th></th></th>	26	27	28	29	30 <th>31</th> <th>32</th> <th>33</th> <th>34</th> <th>35 <th>36</th><th>37 <th>38</th><th>39</th><th>40</th><th>41 </th></th></th>	31	32	33	34	35 <th>36</th> <th>37 <th>38</th><th>39</th><th>40</th><th>41 </th></th>	36	37 <th>38</th> <th>39</th> <th>40</th> <th>41 </th>	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎ : Excellent ○ : Good

ISO	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Duplex	Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5 <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11 <th>12</th><th>13</th><th>14 <th>15</th><th>16 <th>17</th><th>18</th><th>19</th><th>20 </th></th></th></th>	6	7	8	9	10	11 <th>12</th> <th>13</th> <th>14 <th>15</th><th>16 <th>17</th><th>18</th><th>19</th><th>20 </th></th></th>	12	13	14 <th>15</th> <th>16 <th>17</th><th>18</th><th>19</th><th>20 </th></th>	15	16 <th>17</th> <th>18</th> <th>19</th> <th>20 </th>	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S								H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25 <th>26</th> <th>27</th> <th>28</th> <th>29</th> <th>30 <th>31</th><th>32</th><th>33</th><th>34</th><th>35 <th>36</th><th>37 <th>38</th><th>39</th><th>40</th><th>41 </th></th></th></th>	26	27	28	29	30 <th>31</th> <th>32</th> <th>33</th> <th>34</th> <th>35 <th>36</th><th>37 <th>38</th><th>39</th><th>40</th><th>41 </th></th></th>	31	32	33	34	35 <th>36</th> <th>37 <th>38</th><th>39</th><th>40</th><th>41 </th></th>	36	37 <th>38</th> <th>39</th> <th>40</th> <th>41 </th>	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)						
				Ø10.0-11.99	Ø12.09-14.99	Ø15.00-17.99	Ø18.00-21.99	Ø22.0-26.9	Ø27.0-33.99	
P	1	Non-alloy steel	100-126	0.14-0.24	0.18-0.31	0.23-0.39	0.30-0.44	0.37-0.57	0.41-0.61	
	2		84-110	0.12-0.21	0.15-0.26	0.23-0.39	0.30-0.44	0.37-0.57	0.41-0.61	
	3		63-84	0.11-0.18	0.13-0.22	0.19-0.31	0.24-0.35	0.33-0.51	0.36-0.54	
	4		58-74	0.09-0.14	0.11-0.18	0.17-0.28	0.23-0.33	0.28-0.42	0.32-0.47	
	5		58-74	0.09-0.14	0.11-0.18	0.17-0.28	0.23-0.33	0.28-0.42	0.32-0.47	
	6	Low alloy steel	74-95	0.11-0.18	0.13-0.22	0.19-0.31	0.24-0.35	0.33-0.51	0.37-0.55	
	7		63-84	0.11-0.18	0.13-0.22	0.17-0.28	0.24-0.35	0.33-0.51	0.37-0.55	
	8		58-74	0.09-0.14	0.11-0.18	0.14-0.23	0.23-0.33	0.28-0.42	0.32-0.47	
	9		47-63	0.07-0.11	0.09-0.13	0.14-0.23	0.23-0.33	0.28-0.42	0.32-0.47	
	10		High alloyed steel, and tool steel	53-68	0.09-0.14	0.11-0.18	0.14-0.23	0.20-0.29	0.22-0.34	0.26-0.39
	11			42-58	0.09-0.14	0.11-0.18	0.12-0.20	0.23-0.33	0.22-0.34	0.26-0.39
M	12	Stainless steel								
	13									
	14									
K	15	Grey cast iron	105-131	0.13-0.23	0.17-0.29	0.22-0.41	0.30-0.46	0.40-0.56	0.44-0.61	
	16		79-100	0.10-0.18	0.12-0.22	0.18-0.32	0.22-0.33	0.28-0.39	0.32-0.44	
	17	Nodular cast iron	100-126	0.11-0.20	0.14-0.24	0.19-0.34	0.23-0.35	0.31-0.44	0.35-0.48	
	18		79-100	0.10-0.18	0.12-0.22	0.15-0.29	0.21-0.32	0.28-0.39	0.32-0.44	
	19		105-131	0.11-0.20	0.14-0.24	0.19-0.34	0.23-0.35	0.31-0.44	0.35-0.48	
20	Malleable cast iron	79-100	0.10-0.15	0.12-0.20	0.15-0.29	0.21-0.32	0.28-0.39	0.32-0.44		
N	21	Aluminum-wrought alloy								
	22									
	23	Aluminum-cast, alloyed								
	24									
	25									
	26	Copper and Copper Alloys (Bronze / Brass)								
	27									
	28									
	29	Non Metallic Materials								
	30									
S	31	Heat Resistant Super Alloys								
	32									
	33									
	34									
	35									
	36		Titanium Alloys							
	37									
H	38	Hardened steel								
	39									
	40	Chilled Cast Iron								
	41	Hardened Cast Iron								

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

► Recommend you to reduce the feed rate to 85%, 70% when you use 5xD, 8xD holders.

► For use of 8xD holder, we recommend to use a pilot drill with equal to or larger than 140° point angle (0.5xD ~ 1.5xD).


The use of the centering pre-hole improves hole location, roundness and surface finish.



**ASSEMBLY OF i-ONE DRILLS
MONTAGE DES i-ONE DRILLS**



Make sure to clean the insert and insert seat.
Schneideinsatz und Haltersitz sorgfältig reinigen.

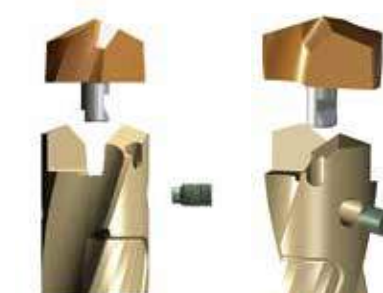

Slide the drill insert into the slot of the holder and press down the insert to touch the bottom of the slot.
Schneideinsatz in den Haltersitz einführen und den Schneideinsatz fest auf den Grund des Haltersitzes pressen.

After confirming the insert is pressed down to the bottom of the slot, tighten the screw using anti-seize compound.
Wenn der Schneideinsatz fest auf den Grund des Haltersitzes gepresst ist, die Schraube fest anziehen und dabei Spezialfett verwenden.



WRENCH TYPE	PRODUCT NO.	SERIES (INSERT SIZE)	TORX PLUS®	TORQUE (N·m)
	TWFP05	S10~S12 (10.00 ~ 13.90)	5 IP	0.6
	TWDP07	S14~S16 (14.00 ~ 17.90)	7 IP	1.0
	TWDP09	S18~S22 (18.00 ~ 23.90)	9 IP	1.5
	TWDP10	S24~S28 (24.00 ~ 29.77)	10 IP	2.2
	TWDP15	S30~S32 (30.00 ~ 33.73)	15 IP	3.2


Use the Torx Plus wrench
Benutzen Sie den Winkeldreher oder T - Schlüsse

- ▶ Need to use appropriate wrenches and screws as indicated.
Unbedingt die angegebenen Schrauben und Dreher verwenden.
- ▶ It's important to tighten up the screw properly.
Es ist wichtig, die Schraube korrekt und fest anzuziehen.


**CAUTION-NOT RECOMMENDABLE APPLICATION
ACHTUNG - NICHT EMPFOHLENE ANWENDUNG**




Intersecting cross hole is bigger than the drill insert's Margin Length.
Der Haltersitz ist größer als die Breite des Schneideinsatzes.

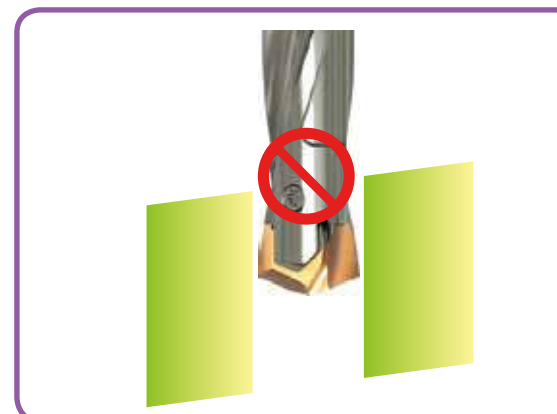

Material with slanting entrance and exit over 7 degrees.
(If drilling 7 degrees or under slanting surface, reduce the feed about 30-50%)
Werkstücke mit schrägem Anschnitt oder Austritt von über 7°. (Zum Bohren von bis zu 7° Schräge den Vorschub um ca. 30-50% reduzieren).

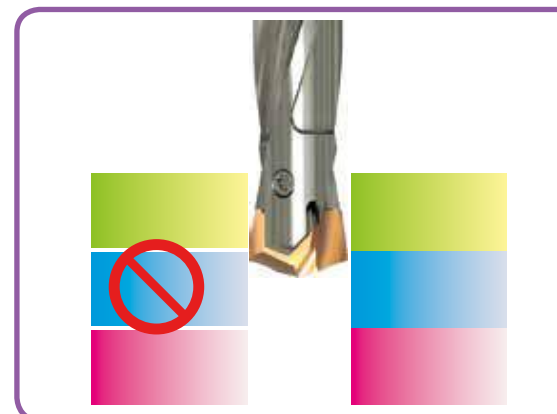


For drilling stacked plates, minimize the space between the plates.
Beim Bohren von Blechpaketen den Abstand der Bleche minimieren.
The space between stacked plates can cause insert breakage or poor chip control.
Freiraum in Blechpaketen kann den Bruch des Schneideinsatzes oder schlechte Entspannung verursachen.

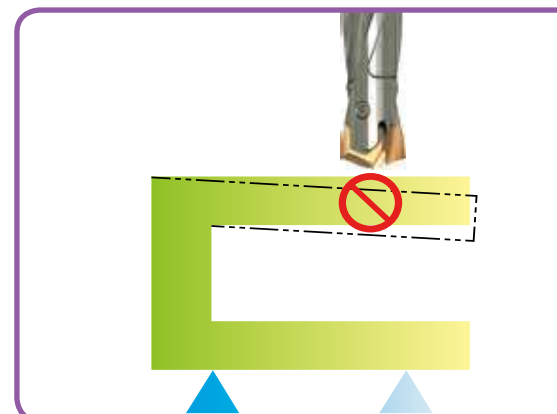

The material needs to be fixtured securely before drilling.
Das Werkstück muss fest und sicher aufgespannt sein

**RECOMMENDED COOLANT PRESSURE AND FLOW RATE ON VERTICAL DRILLING
EMPFOHLENE KÜHLMITTELDRUCK UND - MENGE BEIM VERTIKALEN BOHREN**

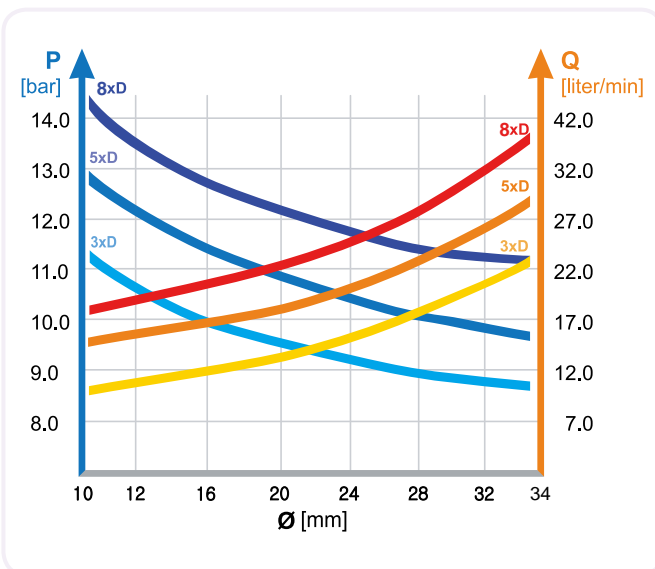

- Recommended emulsion mix is 6 - 8%.
Empfohlene Emulsionsmischung 6 - 8%.
- For Drilling into Stainless and High Strength steels, a mix of 10% is recommended.
Beim Bohren in rostfreie und hochfeste Stähle werden 10% empfohlen.
- For horizontal drilling, 30% reduction on the coolant pressure and flow rate is possible.
Beim horizontalen Bohren können Kühlmitteldruck und -menge um 30% gemindert werden.
- Dry drilling is possible for 1-2xD drilling. But not recommended.
Trocken Bohren ist möglich bei 1-2xD. Aber nicht empfohlen.

**TROUBLE SHOOTING
PROBLEMLÖSUNGEN**



- 1) Heavy flank wear / Fast flank wear**
- Reduce cutting speed
 - Increase feed



- 2) Chipping on cutting edge**
- Reduce feed
 - Check the rigidity of spindle and chuck
 - Rigid clamping of workpiece




- 3) Build-up on cutting edge**
- Increase cutting speed
 - Use a coated insert




- 4) Chipping or break down on outer corner**
- Reduce feed
 - Rigid clamping of workpiece




- 5) Wear of land margin**
- Rigid clamping of workpiece
 - Reduce cutting speed
 - Increase coolant flow



- 6) Unsatisfactory positioning of the hole**
- Rigid clamping of workpiece
 - Reduce feed during entrance or exit



- 7) Scratching on holder**
- Rigid clamping of workpiece
 - Reduce feed
 - Increase coolant flow



- 8) Unsatisfactory surface finish**
- Rigid clamping of workpiece
 - Increase coolant flow and pressure



i-DREAM DRILLS

i-Dream Drills

- For General Steels and Stainless Steels
- Für allgemeine Stähle und Edelstähle

SELECTION GUIDE



SERIES	YA1A	YA2C	YB1A	YB2C
TYPE	A		B	
SIZE MIN	12.00		14.00	
SIZE MAX	13.89		15.87	
PAGE	58		59	
SURFACE TREATMENT	TiAlN	TiCN	TiAlN	TiCN

CARBIDE INSERTS & HOLDERS

i-DREAM DRILLS

For General Steels and Stainless Steels



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.68

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	TiAlN	TiCN	TiAlN	TiCN	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	○	◎	○	
	2		About 0.45% C Annealed	190	13	◎	○	◎	○	
	3		About 0.45% C Quenched & Tempered	250	25	◎	○	◎	○	
	4		About 0.75% C Annealed	270	28	◎	○	◎	○	
	5		About 0.75% C Quenched & Tempered	300	32	◎	○	◎	○	
	6	Low alloy steel	Annealed	180	10	◎	○	◎	○	
	7		Quenched & Tempered	275	29	◎	○	◎	○	
	8		Quenched & Tempered	300	32	◎	○	◎	○	
	9		Quenched & Tempered	350	38	◎	○	◎	○	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	○	◎	○
	11	Quenched & Tempered	325	35	◎	○	◎	○		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		◎		◎	
	13		Martensitic Quenched & Tempered	240	23		◎		◎	
	14		Austenitic	180	10		◎		◎	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎		◎		
	16		Pearlitic (Martensitic)	260	26	◎		◎		
	17	Nodular cast iron	Ferritic	160	3	◎		◎		
	18		Pearlitic	250	25	◎		◎		
	19		Ferritic	130		◎		◎		
20	Malleable cast iron	Pearlitic	230	21	◎		◎			
N	21	Aluminum-wrought alloy	Not Curable	60			○		○	
	22		Curable Hardened	100			○		○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			○		○	
	24		≤ 12% Si, Curable Hardened	90			○		○	
	25		> 12% Si, Not Curable	130				○		○
	26		Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90			○		○
	27	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100				○		○
	28		Duroplastic, Fiber Reinforced Plastic							
	29		Rubber, Wood, etc.							
	S	30	Heat Resistant Super Alloys	Fe Based Annealed	200	15				
31		Fe Based Cured		280	30					
32		Ni or Co Based Annealed		250	25					
33		Ni or Co Based Cured		350	38					
34		Titanium Alloys	Pure Titanium	400 Rm						
35		Alpha + Beta Alloys Hardened	1050 Rm							
36		Hardened steel	Hardened	550	55					
37	Hardened		630	60						
38	Chilled Cast Iron		Cast	400	42					
H	39	Hardened Cast Iron	Hardened	550	55					
	40		Cast	400	42					
	41	Hardened Cast Iron	Hardened	550	55					

YC1A	YC2C	YD1A	YD2C	YE1A	YE2C	YF1A	YF2C	YG1A	YG2C
C		D		E		F		G	
16.00		18.00		20.00		22.00		24.00	
17.86		19.84		21.83		23.81		25.80	
60		61		62		63		64	
TiAlN	TiCN	TiAlN	TiCN	TiAlN	TiCN	TiAlN	TiCN	TiAlN	TiCN



◎	○	◎	○	◎	○	◎	○	◎	○	1
◎	○	◎	○	◎	○	◎	○	◎	○	2
◎	○	◎	○	◎	○	◎	○	◎	○	3
◎	○	◎	○	◎	○	◎	○	◎	○	4
◎	○	◎	○	◎	○	◎	○	◎	○	5
◎	○	◎	○	◎	○	◎	○	◎	○	6
◎	○	◎	○	◎	○	◎	○	◎	○	7
◎	○	◎	○	◎	○	◎	○	◎	○	8
◎	○	◎	○	◎	○	◎	○	◎	○	9
◎	○	◎	○	◎	○	◎	○	◎	○	10
◎	○	◎	○	◎	○	◎	○	◎	○	11
	◎		◎		◎		◎		◎	12
	◎		◎		◎		◎		◎	13
	◎		◎		◎		◎		◎	14
◎		◎		◎		◎		◎		15
◎		◎		◎		◎		◎		16
◎		◎		◎		◎		◎		17
◎		◎		◎		◎		◎		18
◎		◎		◎		◎		◎		19
◎		◎		◎		◎		◎		20
	○		○		○		○		○	21
	○		○		○		○		○	22
	○		○		○		○		○	23
	○		○		○		○		○	24
	○		○		○		○		○	25
	○		○		○		○		○	26
	○		○		○		○		○	27
	○		○		○		○		○	28
										29
										30
										31
										32
										33
										34
										35
										36
										37
										38
										39
										40
										41

SELECTION GUIDE



SERIES	YH1A	YH2C
TYPE	H	
SIZE MIN	26.00	
SIZE MAX	27.78	
PAGE	65	
SURFACE TREATMENT	TiAIN	TiCN

CARBIDE INSERTS & HOLDERS

i-DREAM DRILLS

For General Steels and Stainless Steels



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.68

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	YH1A	YH2C	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	○	
	2		About 0.45% C Annealed	190	13	◎	○	
	3		About 0.45% C Quenched & Tempered	250	25	◎	○	
	4		About 0.75% C Annealed	270	28	◎	○	
	5		About 0.75% C Quenched & Tempered	300	32	◎	○	
	6	Low alloy steel	Annealed	180	10	◎	○	
	7		Quenched & Tempered	275	29	◎	○	
	8		Quenched & Tempered	300	32	◎	○	
	9		Quenched & Tempered	350	38	◎	○	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	○
	11			Quenched & Tempered	325	35	◎	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		◎	
	13		Martensitic Quenched & Tempered	240	23		◎	
	14		Austenitic	180	10		◎	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎		
	16		Pearlitic (Martensitic)	260	26	◎		
	17	Nodular cast iron	Ferritic	160	3	◎		
	18		Pearlitic	250	25	◎		
	19		Ferritic	130		◎		
20	Malleable cast iron	Pearlitic	230	21	◎			
N	21	Aluminum-wrought alloy	Not Curable	60			○	
	22		Curable Hardened	100			○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			○	
	24		≤ 12% Si, Curable Hardened	90			○	
	25		> 12% Si, Not Curable	130			○	
	26		Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90			○
	27	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.					○
	28							○
	29							○
	S	30	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	
31		Cured			280	30		
32		Annealed			250	25		
33		Ni or Co Based		Cured	350	38		
34				Cast	320	34		
35		Titanium Alloys		Pure Titanium	400 Rm			
36				Alpha + Beta Alloys Hardened	1050 Rm			
H	37	Hardened steel	Hardened	550	55			
	38		Hardened	630	60			
	39		Cast	400	42			
	40		Hardened Cast Iron	550	55			

YI1A	YI2C	YJ1A	YJ2C	ZH*3	ZH*5	ZH*7
I		J				
28.00		30.00				
29.77		31.75				
66		67				
TiAIN	TiCN	TiAIN	TiCN	3XD	5XD	7XD



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	YI1A	YI2C	YJ1A	YJ2C	ZH*3	ZH*5	ZH*7	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	○	◎	○				
	2		About 0.45% C Annealed	190	13	◎	○	◎	○				
	3		About 0.45% C Quenched & Tempered	250	25	◎	○	◎	○				
	4		About 0.75% C Annealed	270	28	◎	○	◎	○				
	5		About 0.75% C Quenched & Tempered	300	32	◎	○	◎	○				
	6	Low alloy steel	Annealed	180	10	◎	○	◎	○				
	7		Quenched & Tempered	275	29	◎	○	◎	○				
	8		Quenched & Tempered	300	32	◎	○	◎	○				
	9		Quenched & Tempered	350	38	◎	○	◎	○				
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	○	◎	○			
	11			Quenched & Tempered	325	35	◎	○	◎	○			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		◎		◎				
	13		Martensitic Quenched & Tempered	240	23		◎		◎				
	14		Austenitic	180	10		◎		◎				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎		◎					
	16		Pearlitic (Martensitic)	260	26	◎		◎					
	17	Nodular cast iron	Ferritic	160	3	◎		◎					
	18		Pearlitic	250	25	◎		◎					
	19		Ferritic	130		◎		◎					
20	Malleable cast iron	Pearlitic	230	21	◎		◎						
N	21	Aluminum-wrought alloy	Not Curable	60			○		○				
	22		Curable Hardened	100			○		○				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			○		○				
	24		≤ 12% Si, Curable Hardened	90			○		○				
	25		> 12% Si, Not Curable	130			○		○				
	26		Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90			○		○			
	27	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.						○				
	28								○				
	29									○			
	S	30	Heat Resistant Super Alloys	Fe Based	Annealed	200	15						
31		Cured			280	30							
32		Annealed			250	25							
33		Ni or Co Based		Cured	350	38							
34				Cast	320	34							
35		Titanium Alloys		Pure Titanium	400 Rm								
36				Alpha + Beta Alloys Hardened	1050 Rm								
H	37	Hardened steel	Hardened	550	55								
	38		Hardened	630	60								
	39		Cast	400	42								
	40		Hardened Cast Iron	550	55								



YA1A SERIES
YA2C SERIES

i-DREAM DRILL INSERTS & HOLDERS

- i-DREAM DRILL EINSÄTZE UND HALTER
PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX
INSERTI & PORTAINSERI i-DREAM DRILL

Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze

- Secure and accurate seating resulting in accurate repeatability and concentricity.
For most steels materials / In den meisten Stahlsorten
For tough, ductile materials and stainless steels
Light, sharp cutting edge / Scharfe Schneidkante
Soft cutting action / Weicher Schnitt
Minimize cutting forces / Minimaler Schneidendruck
Reduce built-up edge / Reduzierte Gratbildung

Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halters-

- Special Alloy Steels maintain its hardness and toughness under high temperatures.
Innovative surface treatment improves wear resistance and reduces corrosion.
High Performance flute design allows maximum chip evacuation and minimum interference.



CARBIDE ISO 9766 h7 140° P.68, 70

Table with columns: Series Range, Insert EDP No., Insert O.D., Holder EDP No., Shank Dia., Shank Length, Flange Dia., Drilling Depth, Overall Length, Screw No.

Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

Material compatibility table for YA1A and YA2C series, listing ISO standards and material types like Non-alloy steel, Low alloy steel, etc.



YB1A SERIES
YB2C SERIES

i-DREAM DRILL INSERTS & HOLDERS

- i-DREAM DRILL EINSÄTZE UND HALTER
PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX
INSERTI & PORTAINSERI i-DREAM DRILL

Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze

- Secure and accurate seating resulting in accurate repeatability and concentricity.
For most steels materials / In den meisten Stahlsorten
For tough, ductile materials and stainless steels
Light, sharp cutting edge / Scharfe Schneidkante
Soft cutting action / Weicher Schnitt
Minimize cutting forces / Minimaler Schneidendruck
Reduce built-up edge / Reduzierte Gratbildung

Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halters-

- Special Alloy Steels maintain its hardness and toughness under high temperatures.
Innovative surface treatment improves wear resistance and reduces corrosion.
High Performance flute design allows maximum chip evacuation and minimum interference.



CARBIDE ISO 9766 h7 140° P.68, 70

Table with columns: Series Range, Insert EDP No., Insert O.D., Holder EDP No., Shank Dia., Shank Length, Flange Dia., Drilling Depth, Overall Length, Screw No.

Other diameters of insert and shank types of holder are available upon request.

◎: Excellent ○: Good

Material compatibility table for YB1A and YB2C series, listing ISO standards and material types like Non-alloy steel, Low alloy steel, etc.



YC1A SERIES
YC2C SERIES

i-DREAM DRILL INSERTS & HOLDERS

- i-DREAM DRILL EINSÄTZE UND HALTER
- PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX
- INSERTI & PORTAINSERTI i-DREAM DRILL

**- Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze**

- Secure and accurate seating resulting in accurate repeatability and concentricity.
Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.
- i-Dream Drill General / i-Dream Drill allgemeinen**
- For most steels materials / In den meisten Stahlsorten
- i-Dream Drill INOX / i-Dream Drill INOX**
- For tough, ductile materials and stainless steels
Für zähe, verformbare Werkstoffe und rostfreie Stähle.
- Light, sharp cutting edge / Scharfe Schneidkante
- Soft cutting action / Weicher Schnitt
- Minimize cutting forces / Minimaler Schneidendruck
- Reduce built-up edge / Reduzierte Gratbildung

**- Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halters**

- Special Alloy Steels maintain its hardness and toughness under high temperatures.
Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
- Innovative surface treatment improves wear resistance and reduces corrosion.
Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
- High Performance flute design allows maximum chip evacuation and minimum interference.
Optimierte Nutenform für maximale Spanabfuhr.



Series Range (mm)	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth L1	Overall Length L3 Ref.	Screw No.		
	General (TiAIN)	INOX (TiCN)	h7											
			dec.	frac.	mm									
C Ø16.00 to Ø17.99	YC1A1600	YC2C1600	.6299		16.00	ZH16003020 ZH16005020 ZH16007020	20	50	25	3D	48	125.0	TX1617T08	
	YC1A1609	YC2C1609	.6335		16.09					5D	80	157.0		
	YC1A1620	YC2C1620	.6378		16.20					7D	112	189.0		
	YC1A1627	YC2C1627	.6406	41/64	16.27	ZH16503020 ZH16505020 ZH16507020	20	50	25	3D	49.5	127.0		
	YC1A1630	YC2C1630	.6417		16.30					5D	82.5	160.0		
	YC1A1667	YC2C1667	.6562	21/32	16.67					7D	115.5	193.0		
	YC1A1680	YC2C1680	.6614		16.80	ZH17003020 ZH17005020 ZH17007020	20	50	25	3D	51	128.0		
	YC1A1700	YC2C1700	.6693		17.00					5D	85	162.0		
	YC1A1707	YC2C1707	.6719	43/64	17.07					7D	119	196.0		
	YC1A1746	YC2C1746	.6875	11/16	17.46	ZH17503020 ZH17505020 ZH17507020	20	50	25	3D	52.5	130.0		
	YC1A1750	YC2C1750	.6890		17.50					5D	87.5	165.0		
	YC1A1780	YC2C1780	.7008		17.80					7D	122.5	200.0		
	YC1A1786	YC2C1786	.7031	45/64	17.86									

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
YC1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
YC2C	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎



YD1A SERIES
YD2C SERIES

i-DREAM DRILL INSERTS & HOLDERS

- i-DREAM DRILL EINSÄTZE UND HALTER
- PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX
- INSERTI & PORTAINSERTI i-DREAM DRILL

**- Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze**

- Secure and accurate seating resulting in accurate repeatability and concentricity.
Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.
- i-Dream Drill General / i-Dream Drill allgemeinen**
- For most steels materials / In den meisten Stahlsorten
- i-Dream Drill INOX / i-Dream Drill INOX**
- For tough, ductile materials and stainless steels
Für zähe, verformbare Werkstoffe und rostfreie Stähle.
- Light, sharp cutting edge / Scharfe Schneidkante
- Soft cutting action / Weicher Schnitt
- Minimize cutting forces / Minimaler Schneidendruck
- Reduce built-up edge / Reduzierte Gratbildung

**- Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halters**

- Special Alloy Steels maintain its hardness and toughness under high temperatures.
Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
- Innovative surface treatment improves wear resistance and reduces corrosion.
Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
- High Performance flute design allows maximum chip evacuation and minimum interference.
Optimierte Nutenform für maximale Spanabfuhr.



Series Range (mm)	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth L1	Overall Length L3 Ref.	Screw No.	
	General (TiAIN)	INOX (TiCN)	h7										
			dec.	frac.	mm								
D Ø18.00 to Ø19.99	YD1A1800	YD2C1800	.7087		18.00	ZH18003025 ZH18005025 ZH18007025	25	56	32	3D	54	140.3	TX1819T15
	YD1A1826	YD2C1826	.7188	23/32	18.26					5D	90	176.3	
	YD1A1850	YD2C1850	.7283		18.50					7D	126	212.3	
	YD1A1865	YD2C1865	.7344	47/64	18.65	ZH18503025 ZH18505025 ZH18507025	25	56	32	3D	55.5	141.3	
	YD1A1880	YD2C1880	.7402		18.80					5D	92.5	178.3	
	YD1A1900	YD2C1900	.7480		19.00					7D	129.5	215.3	
	YD1A1905	YD2C1905	.7500	3/4	19.05	ZH19003025 ZH19005025 ZH19007025	25	56	32	3D	57	144.3	
	YD1A1927	YD2C1927	.7587		19.27					5D	95	182.3	
	YD1A1945	YD2C1945	.7656	49/64	19.45					7D	133	220.3	
	YD1A1950	YD2C1950	.7677		19.50	ZH19503025 ZH19505025 ZH19507025	25	56	32	3D	58.5	145.3	
	YD1A1980	YD2C1980	.7795		19.80					5D	97.5	184.3	
	YD1A1984	YD2C1984	.7812	25/32	19.84					7D	136.5	223.3	

► Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
YD1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
YD2C	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

i-DREAM DRILL INSERTS & HOLDERS

- **i-DREAM DRILL EINSÄTZE UND HALTER**
- **PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX**
- **INSERTI & PORTAINSERTI i-DREAM DRILL**

- Features of i-Dream Drill Inserts-

- Merkmale des i-Dream Drill Einsätze**
- ▶ Secure and accurate seating resulting in accurate repeatability and concentricity. Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.
 - i-Dream Drill General / i-Dream Drill allgemeinen**
 - ▶ For most steels materials / In den meisten Stahlsorten
 - i-Dream Drill INOX / i-Dream Drill INOX**
 - ▶ For tough, ductile materials and stainless steels Für zähe, verformbare Werkstoffe und rostfreie Stähle.
 - ▶ Light, sharp cutting edge / Scharfe Schneidkante
 - ▶ Soft cutting action / Weicher Schnitt
 - ▶ Minimize cutting forces / Minimaler Schneidendruck
 - ▶ Reduce built-up edge / Reduzierte Gratbildung

- Features of i-Dream Drill Holders-

- Merkmale des i-Dream Drill Halters-**
- ▶ Special Alloy Steels maintain its hardness and toughness under high temperatures. Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
 - ▶ Innovative surface treatment improves wear resistance and reduces corrosion. Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
 - ▶ High Performance flute design allows maximum chip evacuation and minimum interference. Optimierte Nutenform für maximale Spanabfuhr.



Series Range (mm)	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.
	General (TiAIN)	INOX (TiCN)	h7		L1					L3 Ref.			
			dec.	frac.	mm								
G Ø24.00 to Ø25.99	YG1A2400	YG2C2400	.9449		24.00	ZH24003032	32	60	37	3D 72	164.8	TX2425T20	
	YG1A2421	YG2C2421	.9531	61/64	24.21	ZH24005032				5D 120	212.8		
						ZH24007032				7D 168	260.8		
	YG1A2450	YG2C2450	.9646		24.50	ZH24503032	32	60	37	3D 73.5	165.8		
	YG1A2461	YG2C2461	.9688	31/32	24.61	ZH24505032				5D 122.5	214.8		
	YG1A2470	YG2C2470	.9724		24.70	ZH25003032				7D 171.5	263.8		
	YG1A2500	YG2C2500	.9843	63/64	25.00	ZH25005032				3D 75	167.8		
						ZH25007032	32	60	37	5D 125	217.8		
	YG1A2540	YG2C2540	1.0000	1	25.40	ZH25007032				7D 175	267.8		
	YG1A2550	YG2C2550	1.0039		25.50	ZH25503032				3D 76.5	170.8		
YG1A2567	YG2C2567	1.0106		25.67	ZH25505032	5D 127.5				221.8			
					ZH25507032	32	60	37	7D 178.5	272.8	TX2526T20		
YG1A2570	YG2C2570	1.0118		25.70	ZH25507032				5D 127.5	221.8			
	YG1A2580	YG2C2580	1.0156	1-1/64	25.80	ZH25507032							

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc																								
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
YG1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
YG2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N									S				H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc																								
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
YG1A	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
YG2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

i-DREAM DRILL INSERTS & HOLDERS

- **i-DREAM DRILL EINSÄTZE UND HALTER**
- **PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX**
- **INSERTI & PORTAINSERTI i-DREAM DRILL**

- Features of i-Dream Drill Inserts-

- Merkmale des i-Dream Drill Einsätze**
- ▶ Secure and accurate seating resulting in accurate repeatability and concentricity. Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.
 - i-Dream Drill General / i-Dream Drill allgemeinen**
 - ▶ For most steels materials / In den meisten Stahlsorten
 - i-Dream Drill INOX / i-Dream Drill INOX**
 - ▶ For tough, ductile materials and stainless steels Für zähe, verformbare Werkstoffe und rostfreie Stähle.
 - ▶ Light, sharp cutting edge / Scharfe Schneidkante
 - ▶ Soft cutting action / Weicher Schnitt
 - ▶ Minimize cutting forces / Minimaler Schneidendruck
 - ▶ Reduce built-up edge / Reduzierte Gratbildung

- Features of i-Dream Drill Holders-

- Merkmale des i-Dream Drill Halters-**
- ▶ Special Alloy Steels maintain its hardness and toughness under high temperatures. Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
 - ▶ Innovative surface treatment improves wear resistance and reduces corrosion. Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
 - ▶ High Performance flute design allows maximum chip evacuation and minimum interference. Optimierte Nutenform für maximale Spanabfuhr.



Series Range (mm)	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia. SD	Shank Length L2	Flange Dia. FD	Drilling Depth		Overall Length L3 Ref.	Screw No.
	General (TiAIN)	INOX (TiCN)	h7		L1					L3 Ref.			
			dec.	frac.	mm								
H Ø26.00 to Ø27.99	YH1A2600	YH2C2600	1.0236		26.00	ZH26003032	32	60	37	3D 78	171.2	TX2627T25	
	YH1A2619	YH2C2619	1.0312	1-1/32	26.19	ZH26005032				5D 130	223.2		
						ZH26007032				7D 182	275.2		
	YH1A2650	YH2C2650	1.0433		26.50	ZH26503032	32	60	37	3D 79.5	172.2		
	YH1A2659	YH2C2659	1.0469	1-3/64	26.59	ZH26505032				5D 132.5	225.2		
	YH1A2699	YH2C2699	1.0625	1-1/16	26.99	ZH26507032				7D 185.5	278.2		
	YH1A2700	YH2C2700	1.0630		27.00	ZH27003032				3D 81	174.2		
						ZH27005032	32	60	37	5D 135	228.2		
	YH1A2750	YH2C2750	1.0827		27.50	ZH27007032				7D 189	282.2		
	YH1A2778	YH2C2778	1.0938	1-3/32	27.78	ZH27503032				3D 82.5	175.2		
					ZH27505032	5D 137.5				230.2			
					ZH27507032	32	60	37	7D 192.5	285.2	TX2728T25		

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc																								
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
YH1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
YH2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N									S				H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc																								
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
YH1A	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
YH2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

i-DREAM DRILL INSERTS & HOLDERS

- **i-DREAM DRILL EINSÄTZE UND HALTER**
- **PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX**
- **INSERTI & PORTAINSERTI i-DREAM DRILL**

**- Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze**

- ▶ Secure and accurate seating resulting in accurate repeatability and concentricity.
Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.
- i-Dream Drill General / i-Dream Drill allgemeinen**
- ▶ For most steels materials / In den meisten Stahlsorten
- i-Dream Drill INOX / i-Dream Drill INOX**
- ▶ For tough, ductile materials and stainless steels
Für zähe, verformbare Werkstoffe und rostfreie Stähle.
- ▶ Light, sharp cutting edge / Scharfe Schneidkante
- ▶ Soft cutting action / Weicher Schnitt
- ▶ Minimize cutting forces / Minimaler Schneidendruck
- ▶ Reduce built-up edge / Reduzierte Gratbildung

**- Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halters-**

- ▶ Special Alloy Steels maintain its hardness and toughness under high temperatures.
Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
- ▶ Innovative surface treatment improves wear resistance and reduces corrosion.
Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
- ▶ High Performance flute design allows maximum chip evacuation and minimum interference.
Optimierte Nutenform für maximale Spanabfuhr.



Series Range	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	Screw No.
	General (TiAlN)	INOX (TiCN)	dec.	h7 frac.	mm					L1	L3 Ref.		
I Ø28.00 to Ø29.99	YI1A2800	YI2C2800	1.1024		28.00	ZH28003032				3D 84	178.2	TX2829T25	
	YI1A2818	YI2C2818	1.1094	1-7/64	28.18	ZH28005032	32	60	37	5D 140	234.2		
						ZH28007032				7D 196	290.2		
	YI1A2850	YI2C2850	1.1220		28.50	ZH28503032				3D 85.5	179.2		
	YI1A2858	YI2C2858	1.1250	1-1/8	28.58	ZH28505032	32	60	37	5D 142.5	236.2		
						ZH28507032				7D 199.5	293.2		
	YI1A2900	YI2C2900	1.1417		29.00	ZH29003032				3D 87	182.2		
	YI1A2937	YI2C2937	1.1562	1-5/32	29.37	ZH29005032	32	60	37	5D 145	240.2		
						ZH29007032				7D 203	298.2		
	YI1A2950	YI2C2950	1.1614		29.50	ZH29503032				3D 88.5	183.2		
					ZH29505032	32	60	37	5D 147.5	242.2			
	YI1A2977	YI2C2977	1.1719	1-11/64	29.77	ZH29507032				7D 206.5	301.2	TX2930T25	

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
YI1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
YI2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
YI1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
YI2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

i-DREAM DRILL INSERTS & HOLDERS

- **i-DREAM DRILL EINSÄTZE UND HALTER**
- **PLAQUETTES ET PORTE-PLAQUETTE I-DREAM DRILL - USAGE GÉNÉRAL / INOX**
- **INSERTI & PORTAINSERTI i-DREAM DRILL**

**- Features of i-Dream Drill Inserts-
Merkmale des i-Dream Drill Einsätze**

- ▶ Secure and accurate seating resulting in accurate repeatability and concentricity.
Der sichere und genaue Sitz der Platte garantiert genaue Wiederholbarkeit beim Einsatz und beim Rundlauf.
- i-Dream Drill General / i-Dream Drill allgemeinen**
- ▶ For most steels materials / In den meisten Stahlsorten
- i-Dream Drill INOX / i-Dream Drill INOX**
- ▶ For tough, ductile materials and stainless steels
Für zähe, verformbare Werkstoffe und rostfreie Stähle.
- ▶ Light, sharp cutting edge / Scharfe Schneidkante
- ▶ Soft cutting action / Weicher Schnitt
- ▶ Minimize cutting forces / Minimaler Schneidendruck
- ▶ Reduce built-up edge / Reduzierte Gratbildung

**- Features of i-Dream Drill Holders-
Merkmale des i-Dream Drill Halters-**

- ▶ Special Alloy Steels maintain its hardness and toughness under high temperatures.
Speziell legierter Stahl, der seine Härte und Zähigkeit auch bei hohen Temperaturen behält.
- ▶ Innovative surface treatment improves wear resistance and reduces corrosion.
Innovative Oberflächenbehandlung, die die Verschleissfestigkeit erhöht und die Korrosion vermindert.
- ▶ High Performance flute design allows maximum chip evacuation and minimum interference.
Optimierte Nutenform für maximale Spanabfuhr.



Series Range	Insert EDP No.		Insert O.D.			Holder EDP No.	Shank Dia.	Shank Length	Flange Dia.	Drilling Depth		Overall Length	Screw No.
	General (TiAlN)	INOX (TiCN)	dec.	h7 frac.	mm					L1	L3 Ref.		
J Ø30.00 to Ø31.99	YJ1A3000	YJ2C3000	1.1811		30.00	ZH30003032				3D 90	186.0	TX3031T25	
	YJ1A3016	YJ2C3016	1.1875	1-3/16	30.16	ZH30005032	32	60	37	5D 150	246.0		
						ZH30007032				7D 210	306.0		
	YJ1A3050	YJ2C3050	1.2008		30.50	ZH30503032				3D 91.5	187.0		
	YJ1A3056	YJ2C3056	1.2031	1-13/64	30.56	ZH30505032	32	60	37	5D 152.5	248.0		
						ZH30507032				7D 213.5	309.0		
	YJ1A3096	YJ2C3096	1.2188	1-7/32	30.96	ZH31003032				3D 93	188.0		
	YJ1A3100	YJ2C3100	1.2205		31.00	ZH31005032	32	60	37	5D 155	250.0		
						ZH31007032				7D 217	312.0		
	YJ1A3150	YJ2C3150	1.2402		31.50	ZH31503032				3D 94.5	191.0		
					ZH31505032	32	60	37	5D 157.5	254.0			
	YJ1A3175	YJ2C3175	1.2500	1-1/4	31.75	ZH31507032				7D 220.5	317.0	TX3132T25	

▶ Other diameters of insert and shank types of holder are available upon request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
YJ1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
YJ2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
YJ1A	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
YJ2C	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YA1A, YB1A, YC1A, YD1A, YE1A, YF1A, YG1A, YH1A, YI1A, YJ1A SERIES

i-DREAM DRILLS - GENERAL

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)					
				Ø12.00-14.99	Ø15.00-17.99	Ø18.00-21.99	Ø22.00-26.99	Ø27.00-31.99	
P	1	Non-alloy steel	95-120	0.16-0.28	0.21-0.35	0.27-0.40	0.34-0.52	0.37-0.55	
	2		80-105	0.14-0.24	0.21-0.35	0.27-0.40	0.34-0.52	0.37-0.55	
	3		60-80	0.12-0.20	0.17-0.28	0.22-0.32	0.30-0.46	0.33-0.49	
	4		55-70	0.10-0.16	0.15-0.25	0.21-0.30	0.25-0.38	0.29-0.43	
	5		55-70	0.10-0.16	0.15-0.25	0.21-0.30	0.25-0.38	0.29-0.43	
	6	Low alloy steel	70-90	0.12-0.20	0.17-0.28	0.22-0.32	0.30-0.46	0.34-0.50	
	7		60-80	0.12-0.20	0.15-0.25	0.22-0.32	0.30-0.46	0.34-0.50	
	8		55-70	0.10-0.16	0.13-0.21	0.21-0.30	0.25-0.38	0.29-0.43	
	9		45-60	0.08-0.12	0.13-0.21	0.21-0.30	0.25-0.38	0.29-0.43	
	10		High alloyed steel, and tool steel	50-65	0.10-0.16	0.13-0.21	0.18-0.26	0.20-0.31	0.24-0.35
	11			40-55	0.10-0.16	0.11-0.18	0.21-0.30	0.20-0.31	0.24-0.35
M	12	Stainless steel							
	13								
	14								
K	15	Grey cast iron	100-125	0.15-0.26	0.20-0.37	0.27-0.42	0.36-0.51	0.40-0.55	
	16		75-95	0.11-0.20	0.16-0.29	0.20-0.30	0.25-0.35	0.29-0.40	
	17	Nodular cast iron	95-120	0.13-0.22	0.17-0.31	0.21-0.32	0.28-0.40	0.32-0.44	
	18		75-95	0.11-0.20	0.14-0.26	0.19-0.29	0.25-0.35	0.29-0.40	
	19		100-125	0.13-0.22	0.17-0.31	0.21-0.32	0.28-0.40	0.32-0.44	
20	Malleable cast iron	75-95	0.11-0.18	0.14-0.26	0.19-0.29	0.25-0.35	0.29-0.40		
N	21	Aluminum-wrought alloy							
	22								
	23								
	24	Aluminum-cast, alloyed							
	25								
	26	Copper and Copper Alloys (Bronze / Brass)							
	27								
	28								
	29	Non Metallic Materials							
	30								
S	31	Heat Resistant Super Alloys							
	32								
	33								
	34								
	35								
	36		Titanium Alloys						
	37								
H	38	Hardened steel							
	39								
	40	Chilled Cast Iron							
	41	Hardened Cast Iron							

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

► Recommend you to reduce the feed rate to 85%, 70% when you use 5xD, 7xD holders.

► For use of 7xD holder, we recommend to use a pilot drill with equal to or larger than 140° point angle (0.5xD - 1.5xD). The use of the centering pre-hole improves hole location, roundness and surface finish.



ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)				
				Ø12.00-14.99	Ø15.00-17.99	Ø18.00-21.90	Ø22.00-26.99	Ø27.00-31.99
P	1	Non-alloy steel	95-120	0.16-0.28	0.21-0.35	0.27-0.40	0.34-0.52	0.37-0.55
	2		80-105	0.14-0.24	0.21-0.35	0.27-0.40	0.34-0.52	0.37-0.55
	3		60-80	0.12-0.20	0.17-0.28	0.22-0.32	0.30-0.46	0.33-0.49
	4		55-70	0.10-0.16	0.15-0.25	0.21-0.30	0.25-0.38	0.29-0.43
	5							
	6	Low alloy steel	70-90	0.12-0.20	0.17-0.28	0.22-0.32	0.30-0.46	0.34-0.50
	7		60-80	0.12-0.20	0.15-0.25	0.22-0.32	0.30-0.46	0.34-0.50
	8							
	9							
	10		High alloyed steel, and tool steel	50-65	0.10-0.16	0.13-0.21	0.18-0.26	0.20-0.31
	11							
M	12	Stainless steel	30-45	0.08-0.14	0.09-0.15	0.10-0.16	0.12-0.20	0.14-0.22
	13		30-45	0.08-0.14	0.09-0.15	0.10-0.16	0.12-0.20	0.14-0.22
	14		45-60	0.10-0.16	0.12-0.18	0.14-0.20	0.15-0.26	0.18-0.28
K	15	Grey cast iron						
	16							
	17	Nodular cast iron						
	18							
	19							
20	Malleable cast iron							
N	21	Aluminum-wrought alloy	250-330	0.30-0.40	0.35-0.45	0.40-0.50	0.45-0.55	0.50-0.60
	22		200-250	0.30-0.40	0.35-0.45	0.40-0.50	0.45-0.55	0.50-0.60
	23		200-250	0.25-0.35	0.30-0.40	0.35-0.45	0.40-0.50	0.45-0.55
	24	Aluminum-cast, alloyed	150-220	0.25-0.35	0.30-0.40	0.35-0.45	0.40-0.50	0.45-0.55
	25		100-200	0.20-0.30	0.25-0.35	0.30-0.40	0.35-0.45	0.40-0.50
	26		115-145	0.16-0.28	0.23-0.36	0.29-0.36	0.37-0.45	0.41-0.48
	27	Copper and Copper Alloys (Bronze / Brass)	145-185	0.17-0.29	0.24-0.37	0.30-0.38	0.38-0.46	0.42-0.49
	28		95-120	0.06-0.09	0.09-0.13	0.11-0.13	0.15-0.18	0.19-0.22
	29	Non Metallic Materials						
	30							
S	31	Heat Resistant Super Alloys						
	32							
	33							
	34							
	35	Titanium Alloys						
	36							
	37							
H	38	Hardened steel						
	39							
	40	Chilled Cast Iron						
	41	Hardened Cast Iron						

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

► Recommend you to reduce the feed rate to 85%, 70% when you use 5xD, 7xD holders.

► For use of 7xD holder, we recommend to use a pilot drill with equal to or larger than 140° point angle (0.5xD - 1.5xD). The use of the centering pre-hole improves hole location, roundness and surface finish.

**ASSEMBLY OF i-DREAM DRILLS
MONTAGE DES i-DREAM DRILLS**



Make sure to clean the insert and insert seat.
Schneideinsatz und Haltersitz sorgfältig reinigen.



Slide the drill insert into the slot of the holder and press down the insert to touch the bottom of the slot.
Schneideinsatz in den Haltersitz einführen und den Schneideinsatz fest auf den Grund des Haltersitzes pressen.



After confirming the insert is pressed down to the bottom of the slot, tighten the screw using anti-seize compound.
Wenn der Schneideinsatz fest auf den Grund des Haltersitzes gepresst ist, die Schraube fest anziehen und dabei Spezialfett verwenden.

WRENCH TYPE	PRODUCT NO.	T-HANDLE No.	SERIES (SIZE)
WING TYPE	TWWT08	—	A (Ø12.00-Ø13.99)
			B (Ø14.00-Ø15.99)
			C (Ø16.00-Ø17.99)
TORX BIT TYPE	TWBT15	TWH600	D (Ø18.00-Ø19.99)
	TWBT20		E, F, G (Ø20.00-Ø25.99)
	TWBT25		H, I, J (Ø26.00-Ø31.99)

Use the wing type or T-type wrench.
Benutzen Sie den Winkeldreher oder T - Schlüssel


► Need to use appropriate wrenches and screws as indicated.
Unbedingt die angegebenen Schrauben und Dreher verwenden.

► It's important to tighten up the screw properly.
Es ist wichtig, die Schraube korrekt und fest anzuziehen.


**CAUTION-NOT RECOMMENDABLE APPLICATION
ACHTUNG - NICHT EMPFOHLENE ANWENDUNG**




Intersecting cross hole is bigger than the drill insert's Margin Length.
Der Haltersitz ist größer als die Breite des Schneideinsatzes.

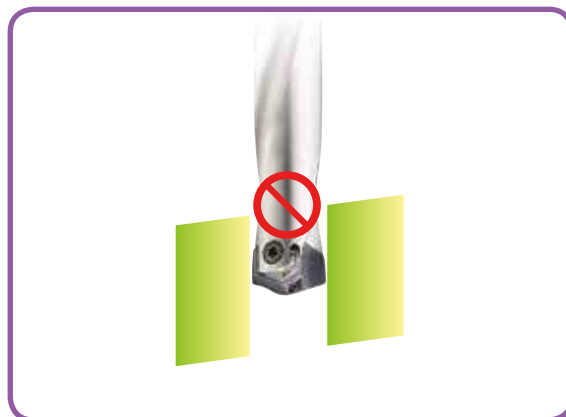

Material with slanting entrance and exit over 7 degrees. (If drilling 7 degrees or under slanting surface, reduce the feed about 30-50%)
Werkstücke mit schrägem Anschnitt oder Austritt von über 7°. (Zum Bohren von bis zu 7° Schräge den Vorschub um ca. 30-50% reduzieren).

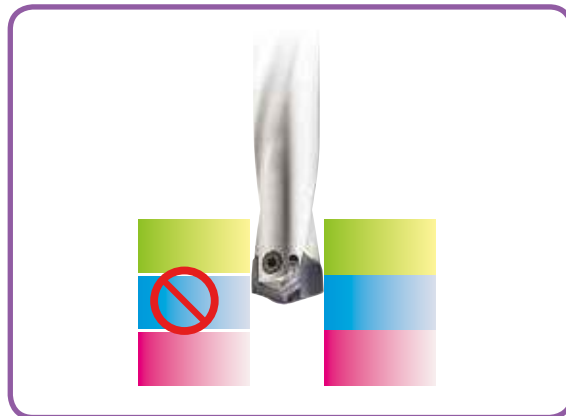


For drilling stacked plates, minimize the space between the plates.
Beim Bohren von Blechpaketen den Abstand der Bleche minimieren.
The space between stacked plates can cause insert breakage or poor chip control.
Freiraum in Blechpaketen kann den Bruch des Schneideinsatzes oder schlechte Entspannung verursachen.

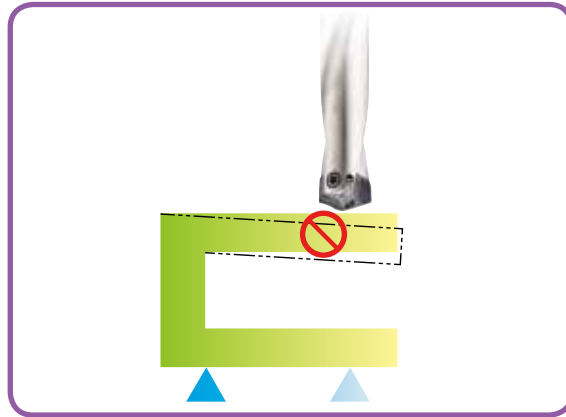

The material needs to be fixtured securely before drilling.
Das Werkstück muss fest und sicher aufgespannt sein

**RECOMMENDED COOLANT PRESSURE AND FLOW RATE ON VERTICAL DRILLING
EMPFOHLENE KÜHLMITTELDRUCK UND - MENGE BEIM VERTIKALEN BOHREN**

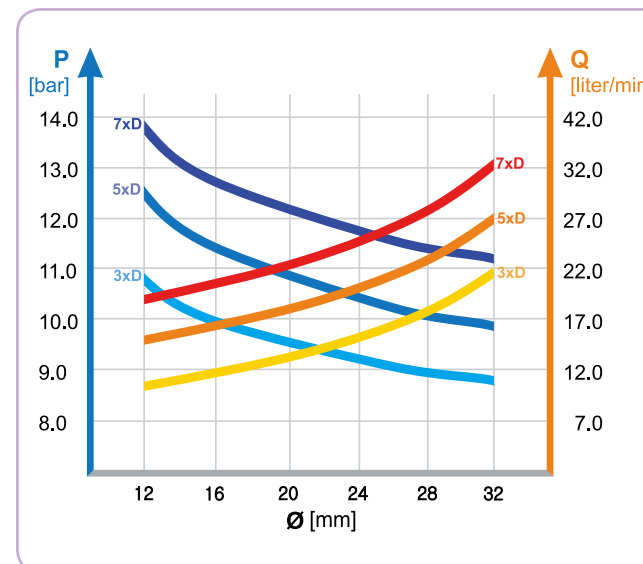

- Recommended emulsion mix is 6 - 8%.
Empfohlene Emulsionsmischung 6 - 8%.
- For Drilling into Stainless and High Strength steels, a mix of 10% is recommended.
Beim Bohren in rostfreie und hochfeste Stähle werden 10% empfohlen.
- For horizontal drilling, 30% reduction on the coolant pressure and flow rate is possible.
Beim horizontalen Bohren können Kühlmitteldruck und - menge um 30% gemindert werden.
- Dry drilling is possible for 1-2xD drilling. But not recommended.
Trocken Bohren ist möglich bei 1-2xD. Aber nicht empfohlen.

**TROUBLE SHOOTING
PROBLEMLÖSUNGEN**



- 1) Heavy flank wear / Fast flank wear**
- Reduce cutting speed
 - Increase feed



- 2) Chipping on cutting edge**
- Reduce feed
 - Check the rigidity of spindle and chuck
 - Rigid clamping of workpiece



- 3) Build-up on cutting edge**
- Increase cutting speed
 - Use a coated insert



- 4) Chipping or break down on outer corner**
- Reduce feed
 - Rigid clamping of workpiece




- 5) Wear of land margin**
- Rigid clamping of workpiece
 - Reduce cutting speed
 - Increase coolant flow



- 6) Unsatisfactory positioning of the hole**
- Rigid clamping of workpiece
 - Reduce feed during entrance or exit



- 7) Scratching on holder**
- Rigid clamping of workpiece
 - Reduce feed
 - Increase coolant flow




- 8) Unsatisfactory surface finish**
- Rigid clamping of workpiece
 - Increase coolant flow and pressure



Leading Through Innovation



Global Cutting Tool Leader **YG-1**

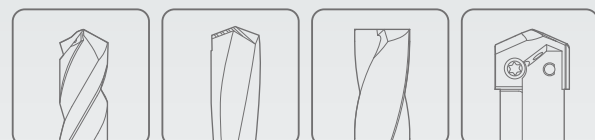

HOLEMAKING

SOLID CARBIDE

DREAM DRILLS -GENERAL

DREAM DRILLS - UNIVERSAL

- For General Purpose (HRc30 to HRc45)

- Für allgemeine Anwendungen (HRc30 bis HRc45)

SELECTION GUIDE



SERIES	DH404	DH423
DRILLING DEPTH	3XD	3XD
LENGTH	STUB	SHORT
SIZE MIN	D3.0	D3.0
SIZE MAX	D20.0	D20.0
PAGE	78	80

SURFACE TREATMENT

TiAIN

SOLID CARBIDE DREAM DRILLS GENERAL

For General Purpose (HRc30 to HRc45)

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good


Recommended cutting conditions : P.94



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	
	2		About 0.45% C Annealed	190	13
	3		About 0.45% C Quenched & Tempered	250	25
	4		About 0.75% C Annealed	270	28
	5		About 0.75% C Quenched & Tempered	300	32
	6	Low alloy steel	Annealed	180	10
	7		Quenched & Tempered	275	29
	8		Quenched & Tempered	300	32
	9		Quenched & Tempered	350	38
	10		High alloyed steel, and tool steel	Annealed	200
	11	Quenched & Tempered		325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15
	13		Martensitic Quenched & Tempered	240	23
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10
	16		Pearlitic (Martensitic)	260	26
	17	Nodular cast iron	Ferritic	160	3
	18		Pearlitic	250	25
	19	Malleable cast iron	Ferritic	130	
20	Pearlitic		230	21	
N	21	Aluminum-wrought alloy	Not Curable	60	
	22		Curable Hardened	100	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	
	24		≤ 12% Si, Curable Hardened	90	
	25		> 12% Si, Not Curable	130	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27		CuZn, CuSnZn (Brass)	90	
	28		CuSn, lead-free copper and electrolytic copper	100	
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.	
30					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34	Titanium Alloys	Ni or Co Based Cured	350	38
	35		Cast	320	34
	36		Pure Titanium	400 Rm	
37	Alpha + Beta Alloys	Hardened	1050 Rm		
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41	Hardened Cast Iron	Hardened	550	55

DH424	DH406	DH408	DH421
5XD	3XD	5XD	8XD
LONG	SHORT	LONG	EXTRA LONG
D1.0	D3.0	D1.0	D3.0
D20.0	D20.0	D20.0	D14.0
83	86	89	92

TiAIN

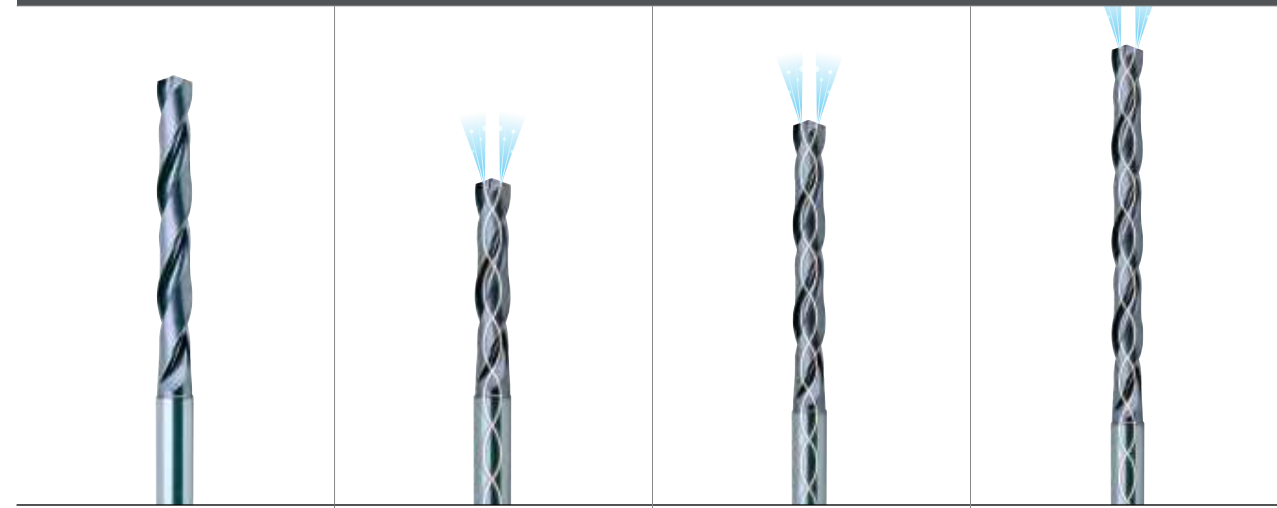

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	
	2		About 0.45% C Annealed	190	13
	3		About 0.45% C Quenched & Tempered	250	25
	4		About 0.75% C Annealed	270	28
	5		About 0.75% C Quenched & Tempered	300	32
	6	Low alloy steel	Annealed	180	10
	7		Quenched & Tempered	275	29
	8		Quenched & Tempered	300	32
	9		Quenched & Tempered	350	38
	10		High alloyed steel, and tool steel	Annealed	200
	11	Quenched & Tempered		325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15
	13		Martensitic Quenched & Tempered	240	23
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10
	16		Pearlitic (Martensitic)	260	26
	17	Nodular cast iron	Ferritic	160	3
	18		Pearlitic	250	25
	19	Malleable cast iron	Ferritic	130	
20	Pearlitic		230	21	
N	21	Aluminum-wrought alloy	Not Curable	60	
	22		Curable Hardened	100	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	
	24		≤ 12% Si, Curable Hardened	90	
	25		> 12% Si, Not Curable	130	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27		CuZn, CuSnZn (Brass)	90	
	28		CuSn, lead-free copper and electrolytic copper	100	
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.	
30					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34	Titanium Alloys	Ni or Co Based Cured	350	38
	35		Cast	320	34
	36		Pure Titanium	400 Rm	
37	Alpha + Beta Alloys	Hardened	1050 Rm		
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41	Hardened Cast Iron	Hardened	550	55

DREAM DRILLS - GENERAL

DH404 SERIES

CARBIDE, DREAM DRILLS


STUB

- VOLLHARTMETALL DREAM SPIRALBOHRER
Forets DREAM DRILLS carbure, série extra-courte
PUNTE ELICOIDALI IN MD - DREAM DRILLS

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
Self centering and chip breaking by R-thinning
Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
Optimized flute shape for strength of drilling and smooth chip evacuation

- Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

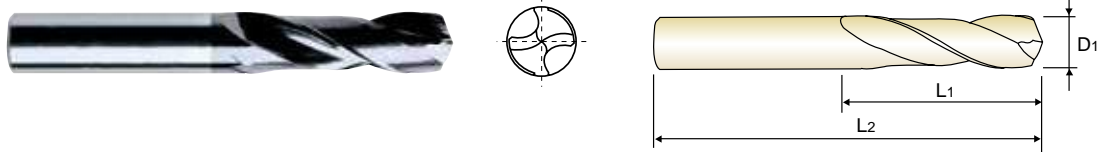

D1=D2
3 x D

Table with 4 columns: EDP No., Drill Diameter (D1), Flute Length (L1), Overall Length (L2). Lists various drill models and their specifications.

Table with 4 columns: EDP No., Drill Diameter (D1), Flute Length (L1), Overall Length (L2). Lists various drill models and their specifications.

Other shank types are available on your request.

NEXT PAGE

©: Excellent ○: Good

ISO material compatibility chart showing suitability for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.

DREAM DRILLS - GENERAL

DH404 SERIES

CARBIDE, DREAM DRILLS


STUB

- VOLLHARTMETALL DREAM SPIRALBOHRER
Forets DREAM DRILLS carbure, série extra-courte
PUNTE ELICOIDALI IN MD - DREAM DRILLS

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
Self centering and chip breaking by R-thinning
Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
Optimized flute shape for strength of drilling and smooth chip evacuation

- Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

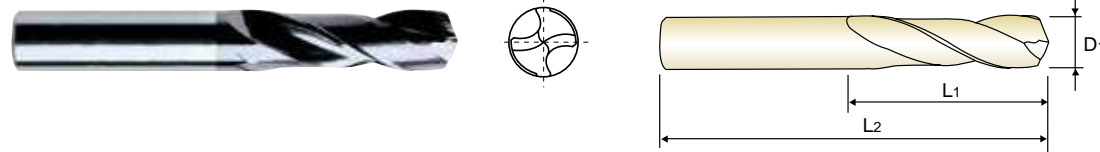

D1=D2
3 x D

Table with 4 columns: EDP No., Drill Diameter (D1), Flute Length (L1), Overall Length (L2). Lists various drill models and their specifications.

Table with 4 columns: EDP No., Drill Diameter (D1), Flute Length (L1), Overall Length (L2). Lists various drill models and their specifications.

Other shank types are available on your request.

©: Excellent ○: Good

ISO material compatibility chart showing suitability for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.

CARBIDE, DREAM DRILLS


SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série courte
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

**KURZ
COURTE
CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

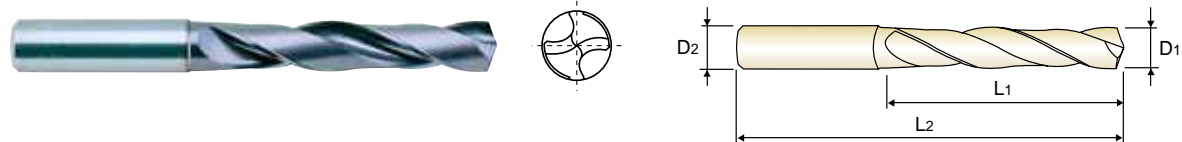

3 × D

Unit : mm					Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH423030	3.0	6	20	62	DH423054	5.4	6	28	66
DH423031	3.1	6	20	62	DH423055	5.5	6	28	66
DH423032	3.2	6	20	62	DH423056	5.6	6	28	66
DH423033	3.3	6	20	62	DH423057	5.7	6	28	66
DH423034	3.4	6	20	62	DH423058	5.8	6	28	66
DH423035	3.5	6	20	62	DH423059	5.9	6	28	66
DH423036	3.6	6	20	62	DH423060	6.0	6	28	66
DH423037	3.7	6	20	62	DH423061	6.1	8	34	79
DH423038	3.8	6	24	66	DH423062	6.2	8	34	79
DH423039	3.9	6	24	66	DH423063	6.3	8	34	79
DH423040	4.0	6	24	66	DH423064	6.4	8	34	79
DH423041	4.1	6	24	66	DH423065	6.5	8	34	79
DH423042	4.2	6	24	66	DH423066	6.6	8	34	79
DH423043	4.3	6	24	66	DH423067	6.7	8	34	79
DH423044	4.4	6	24	66	DH423068	6.8	8	34	79
DH423045	4.5	6	24	66	DH423069	6.9	8	34	79
DH423046	4.6	6	24	66	DH423070	7.0	8	34	79
DH423047	4.7	6	24	66	DH423071	7.1	8	41	79
DH423048	4.8	6	28	66	DH423072	7.2	8	41	79
DH423049	4.9	6	28	66	DH423073	7.3	8	41	79
DH423050	5.0	6	28	66	DH423074	7.4	8	41	79
DH423051	5.1	6	28	66	DH423075	7.5	8	41	79
DH423052	5.2	6	28	66	DH423076	7.6	8	41	79
DH423053	5.3	6	28	66	DH423077	7.7	8	41	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

CARBIDE, DREAM DRILLS


SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série courte
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

**KURZ
COURTE
CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

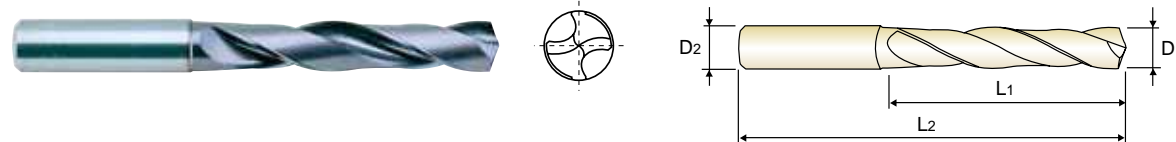

3 × D

Unit : mm					Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH423078	7.8	8	41	79	DH423102	10.2	12	55	102
DH423079	7.9	8	41	79	DH423103	10.3	12	55	102
DH423080	8.0	8	41	79	DH423104	10.4	12	55	102
DH423081	8.1	10	47	89	DH423105	10.5	12	55	102
DH423082	8.2	10	47	89	DH423106	10.6	12	55	102
DH423083	8.3	10	47	89	DH423107	10.7	12	55	102
DH423084	8.4	10	47	89	DH423108	10.8	12	55	102
DH423085	8.5	10	47	89	DH423109	10.9	12	55	102
DH423086	8.6	10	47	89	DH423110	11.0	12	55	102
DH423087	8.7	10	47	89	DH423111	11.1	12	55	102
DH423088	8.8	10	47	89	DH423112	11.2	12	55	102
DH423089	8.9	10	47	89	DH423113	11.3	12	55	102
DH423090	9.0	10	47	89	DH423114	11.4	12	55	102
DH423091	9.1	10	47	89	DH423115	11.5	12	55	102
DH423092	9.2	10	47	89	DH423116	11.6	12	55	102
DH423093	9.3	10	47	89	DH423117	11.7	12	55	102
DH423094	9.4	10	47	89	DH423118	11.8	12	55	102
DH423095	9.5	10	47	89	DH423119	11.9	12	55	102
DH423096	9.6	10	47	89	DH423120	12.0	12	55	102
DH423097	9.7	10	47	89	DH423123	12.3	14	60	107
DH423098	9.8	10	47	89	DH423125	12.5	14	60	107
DH423099	9.9	10	47	89	DH423128	12.8	14	60	107
DH423100	10.0	10	47	89	DH423130	13.0	14	60	107
DH423101	10.1	12	55	102	DH423135	13.5	14	60	107

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

CARBIDE, DREAM DRILLS


SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série courte
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

**KURZ
COURTE
CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

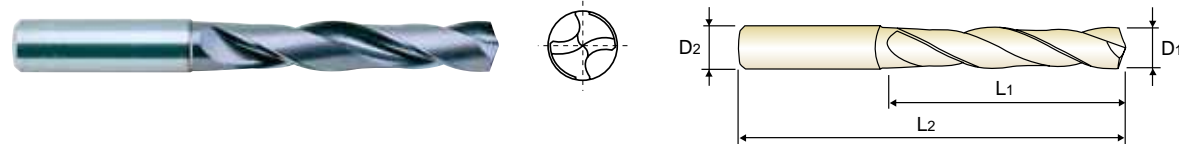

3 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH423138	13.8	14	60	107
DH423140	14.0	14	60	107
DH423145	14.5	16	65	115
DH423148	14.8	16	65	115
DH423150	15.0	16	65	115
DH423155	15.5	16	65	115
DH423158	15.8	16	65	115
DH423160	16.0	16	65	115
DH423165	16.5	18	73	123
DH423168	16.8	18	73	123

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH423170	17.0	18	73	123
DH423175	17.5	18	73	123
DH423178	17.8	18	73	123
DH423180	18.0	18	73	123
DH423185	18.5	20	79	131
DH423190	19.0	20	79	131
DH423195	19.5	20	79	131
DH423198	19.8	20	79	131
DH423200	20.0	20	79	131

▶ Other shank types are available on your request.

© : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
HRc	13	25	28	32	35	10	29	32	38	42	15	35	38	42	10	26	3	25	13	21	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S				H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, DREAM DRILLS


LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série longue
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

**LANG
LONGUE
LUNGA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

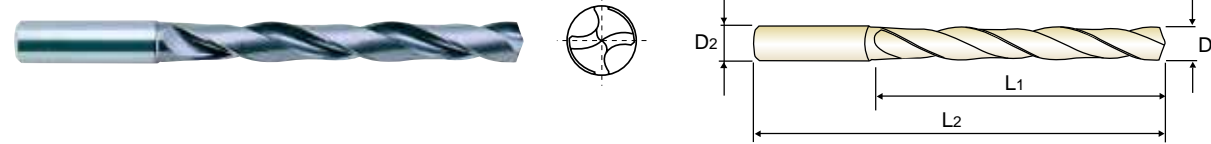

5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH424010	1.0	3	8	55
DH424011	1.1	3	12	55
DH424012	1.2	3	12	55
DH424013	1.3	3	12	55
DH424014	1.4	3	12	55
DH424015	1.5	3	16	55
DH424016	1.6	3	16	55
DH424017	1.7	3	16	55
DH424018	1.8	3	16	55
DH424019	1.9	3	16	55
DH424020	2.0	4	21	57
DH424021	2.1	4	21	57
DH424022	2.2	4	21	57
DH424023	2.3	4	21	57
DH424024	2.4	4	21	57
DH424025	2.5	4	21	57
DH424026	2.6	4	21	57
DH424027	2.7	4	21	57
DH424028	2.8	4	21	57
DH424029	2.9	4	21	57
DH424030	3.0	6	28	66
DH424031	3.1	6	28	66
DH424032	3.2	6	28	66
DH424033	3.3	6	28	66

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH424034	3.4	6	28	66
DH424035	3.5	6	28	66
DH424036	3.6	6	28	66
DH424037	3.7	6	28	66
DH424038	3.8	6	36	74
DH424039	3.9	6	36	74
DH424040	4.0	6	36	74
DH424041	4.1	6	36	74
DH424042	4.2	6	36	74
DH424043	4.3	6	36	74
DH424044	4.4	6	36	74
DH424045	4.5	6	36	74
DH424046	4.6	6	36	74
DH424047	4.7	6	36	74
DH424048	4.8	6	44	82
DH424049	4.9	6	44	82
DH424050	5.0	6	44	82
DH424051	5.1	6	44	82
DH424052	5.2	6	44	82
DH424053	5.3	6	44	82
DH424054	5.4	6	44	82
DH424055	5.5	6	44	82
DH424056	5.6	6	44	82
DH424057	5.7	6	44	82

▶ Other shank types are available on your request.

▶ NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
HRc	13	25	28	32	35	10	29	32	38	42	15	35	38	42	10	26	3	25	13	21	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S				H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, DREAM DRILLS


LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série longue
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

LANG
LONGUE
LUNGA

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neaktivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

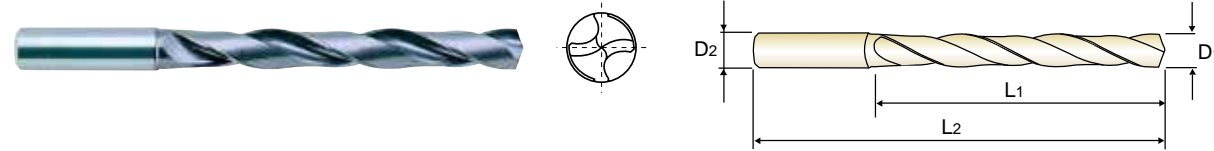

5 x D

Unit : mm					Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH424058	5.8	6	44	82	DH424082	8.2	10	61	103
DH424059	5.9	6	44	82	DH424083	8.3	10	61	103
DH424060	6.0	6	44	82	DH424084	8.4	10	61	103
DH424061	6.1	8	53	91	DH424085	8.5	10	61	103
DH424062	6.2	8	53	91	DH424086	8.6	10	61	103
DH424063	6.3	8	53	91	DH424087	8.7	10	61	103
DH424064	6.4	8	53	91	DH424088	8.8	10	61	103
DH424065	6.5	8	53	91	DH424089	8.9	10	61	103
DH424066	6.6	8	53	91	DH424090	9.0	10	61	103
DH424067	6.7	8	53	91	DH424091	9.1	10	61	103
DH424068	6.8	8	53	91	DH424092	9.2	10	61	103
DH424069	6.9	8	53	91	DH424093	9.3	10	61	103
DH424070	7.0	8	53	91	DH424094	9.4	10	61	103
DH424071	7.1	8	53	91	DH424095	9.5	10	61	103
DH424072	7.2	8	53	91	DH424096	9.6	10	61	103
DH424073	7.3	8	53	91	DH424097	9.7	10	61	103
DH424074	7.4	8	53	91	DH424098	9.8	10	61	103
DH424075	7.5	8	53	91	DH424099	9.9	10	61	103
DH424076	7.6	8	53	91	DH424100	10.0	10	61	103
DH424077	7.7	8	53	91	DH424101	10.1	12	71	118
DH424078	7.8	8	53	91	DH424102	10.2	12	71	118
DH424079	7.9	8	53	91	DH424103	10.3	12	71	118
DH424080	8.0	8	53	91	DH424104	10.4	12	71	118
DH424081	8.1	10	61	103	DH424105	10.5	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

⊙ : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○		

ISO	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

CARBIDE, DREAM DRILLS


LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série longue
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

LANG
LONGUE
LUNGA

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neaktivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

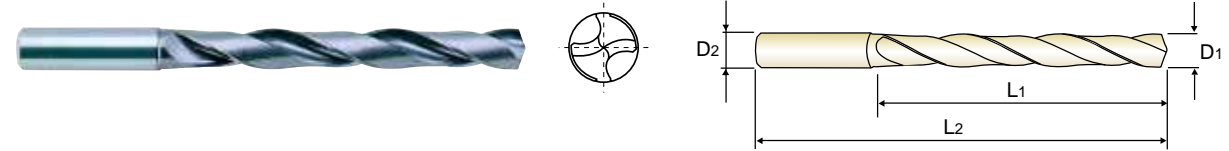

5 x D

Unit : mm					Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH424106	10.6	12	71	118	DH424130	13.0	14	77	124
DH424107	10.7	12	71	118	DH424135	13.5	14	77	124
DH424108	10.8	12	71	118	DH424140	14.0	14	77	124
DH424109	10.9	12	71	118	DH424145	14.5	16	83	133
DH424110	11.0	12	71	118	DH424150	15.0	16	83	133
DH424111	11.1	12	71	118	DH424155	15.5	16	83	133
DH424112	11.2	12	71	118	DH424160	16.0	16	83	133
DH424113	11.3	12	71	118	DH424165	16.5	18	93	143
DH424114	11.4	12	71	118	DH424170	17.0	18	93	143
DH424115	11.5	12	71	118	DH424175	17.5	18	93	143
DH424116	11.6	12	71	118	DH424180	18.0	18	93	143
DH424117	11.7	12	71	118	DH424185	18.5	20	101	153
DH424118	11.8	12	71	118	DH424190	19.0	20	101	153
DH424119	11.9	12	71	118	DH424195	19.5	20	101	153
DH424120	12.0	12	71	118	DH424200	20.0	20	101	153
DH424125	12.5	14	77	124					

▶ Other shank types are available on your request.

⊙ : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○		

ISO	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					



DH406 SERIES


CARBIDE, DREAM DRILLS with COOLANT HOLES

SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL
- Forets DREAM DRILLS carbure, avec arrosage central, série courte
- PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- Self centering and chip breaking by R-thinning
- Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- Optimized flute shape for strength of drilling and smooth chip evacuation

- Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

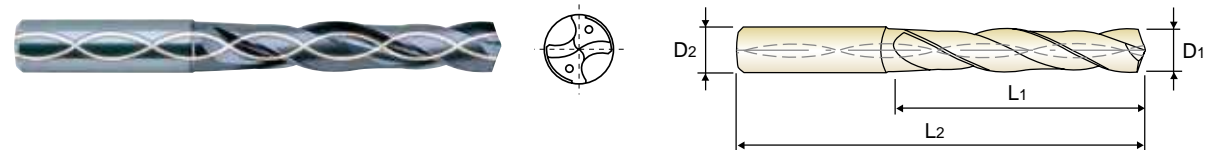

3 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2	TiAlN	D1	D2	L1	L2
DH406030	3.0	6	20	62	DH406054	5.4	6	28	66
DH406031	3.1	6	20	62	DH406055	5.5	6	28	66
DH406032	3.2	6	20	62	DH406056	5.6	6	28	66
DH406033	3.3	6	20	62	DH406057	5.7	6	28	66
DH406034	3.4	6	20	62	DH406058	5.8	6	28	66
DH406035	3.5	6	20	62	DH406059	5.9	6	28	66
DH406036	3.6	6	20	62	DH406060	6.0	6	28	66
DH406037	3.7	6	20	62	DH406061	6.1	8	34	79
DH406038	3.8	6	24	66	DH406062	6.2	8	34	79
DH406039	3.9	6	24	66	DH406063	6.3	8	34	79
DH406040	4.0	6	24	66	DH406064	6.4	8	34	79
DH406041	4.1	6	24	66	DH406065	6.5	8	34	79
DH406042	4.2	6	24	66	DH406066	6.6	8	34	79
DH406043	4.3	6	24	66	DH406067	6.7	8	34	79
DH406044	4.4	6	24	66	DH406068	6.8	8	34	79
DH406045	4.5	6	24	66	DH406069	6.9	8	34	79
DH406046	4.6	6	24	66	DH406070	7.0	8	34	79
DH406047	4.7	6	24	66	DH406071	7.1	8	41	79
DH406048	4.8	6	28	66	DH406072	7.2	8	41	79
DH406049	4.9	6	28	66	DH406073	7.3	8	41	79
DH406050	5.0	6	28	66	DH406074	7.4	8	41	79
DH406051	5.1	6	28	66	DH406075	7.5	8	41	79
DH406052	5.2	6	28	66	DH406076	7.6	8	41	79
DH406053	5.3	6	28	66	DH406077	7.7	8	41	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	40	41	55	60	42	55
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400Rm	1050Rm	550	630	400	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



DH406 SERIES

CARBIDE, DREAM DRILLS with COOLANT HOLES

SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL
- Forets DREAM DRILLS carbure, avec arrosage central, série courte
- PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- Self centering and chip breaking by R-thinning
- Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- Optimized flute shape for strength of drilling and smooth chip evacuation

- Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr



3 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2	TiAlN	D1	D2	L1	L2
DH406078	7.8	8	41	79	DH406102	10.2	12	55	102
DH406079	7.9	8	41	79	DH406103	10.3	12	55	102
DH406080	8.0	8	41	79	DH406104	10.4	12	55	102
DH406081	8.1	10	47	89	DH406105	10.5	12	55	102
DH406082	8.2	10	47	89	DH406106	10.6	12	55	102
DH406083	8.3	10	47	89	DH406107	10.7	12	55	102
DH406084	8.4	10	47	89	DH406108	10.8	12	55	102
DH406085	8.5	10	47	89	DH406109	10.9	12	55	102
DH406086	8.6	10	47	89	DH406110	11.0	12	55	102
DH406087	8.7	10	47	89	DH406111	11.1	12	55	102
DH406088	8.8	10	47	89	DH406112	11.2	12	55	102
DH406089	8.9	10	47	89	DH406113	11.3	12	55	102
DH406090	9.0	10	47	89	DH406114	11.4	12	55	102
DH406091	9.1	10	47	89	DH406115	11.5	12	55	102
DH406092	9.2	10	47	89	DH406116	11.6	12	55	102
DH406093	9.3	10	47	89	DH406117	11.7	12	55	102
DH406094	9.4	10	47	89	DH406118	11.8	12	55	102
DH406095	9.5	10	47	89	DH406119	11.9	12	55	102
DH406096	9.6	10	47	89	DH406120	12.0	12	55	102
DH406097	9.7	10	47	89	DH406125	12.5	14	60	107
DH406098	9.8	10	47	89	DH406130	13.0	14	60	107
DH406099	9.9	10	47	89	DH406135	13.5	14	60	107
DH406100	10.0	10	47	89	DH406140	14.0	14	60	107
DH406101	10.1	12	55	102	DH406145	14.5	16	65	115

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	40	41	55	60	42	55
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400Rm	1050Rm	550	630	400	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, DREAM DRILLS with COOLANT HOLES


SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL
- Forets DREAM DRILLS carbure, avec arrosage central, série courte
- PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

- KURZ
- COURTE
- CORTA

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- Self centering and chip breaking by R-thinning
- Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- Optimized flute shape for strength of drilling and smooth chip evacuation

- Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

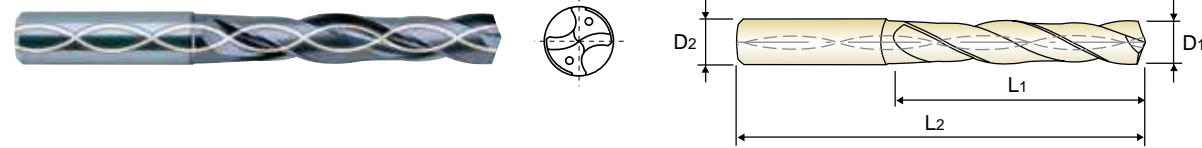

3 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH406150	15.0	16	65	115
DH406155	15.5	16	65	115
DH406160	16.0	16	65	115
DH406165	16.5	18	73	123
DH406170	17.0	18	73	123
DH406175	17.5	18	73	123

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH406180	18.0	18	73	123
DH406185	18.5	20	79	131
DH406190	19.0	20	79	131
DH406195	19.5	20	79	131
DH406200	20.0	20	79	131

Other shank types are available on your request.

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

CARBIDE, DREAM DRILLS with COOLANT HOLES


LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL
- Forets DREAM DRILLS carbure, avec arrosage central, série longue
- PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

- LANG
- LONGUE
- LUNGA

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- Self centering and chip breaking by R-thinning
- Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- Optimized flute shape for strength of drilling and smooth chip evacuation

- Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

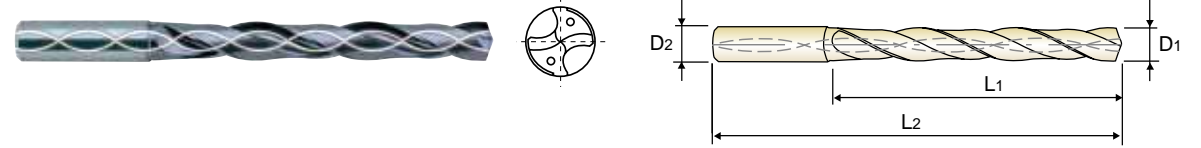

5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH408010	1.0	3	8	55
DH408011	1.1	3	12	55
DH408012	1.2	3	12	55
DH408013	1.3	3	12	55
DH408014	1.4	3	12	55
DH408015	1.5	3	16	55
DH408016	1.6	3	16	55
DH408017	1.7	3	16	55
DH408018	1.8	3	16	55
DH408019	1.9	3	16	55
DH408020	2.0	4	21	57
DH408021	2.1	4	21	57
DH408022	2.2	4	21	57
DH408023	2.3	4	21	57
DH408024	2.4	4	21	57
DH408025	2.5	4	21	57
DH408026	2.6	4	21	57
DH408027	2.7	4	21	57
DH408028	2.8	4	21	57
DH408029	2.9	4	21	57
DH408030	3.0	6	28	66
DH408031	3.1	6	28	66
DH408032	3.2	6	28	66
DH408033	3.3	6	28	66

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH408034	3.4	6	28	66
DH408035	3.5	6	28	66
DH408036	3.6	6	28	66
DH408037	3.7	6	28	66
DH408038	3.8	6	36	74
DH408039	3.9	6	36	74
DH408040	4.0	6	36	74
DH408041	4.1	6	36	74
DH408042	4.2	6	36	74
DH408043	4.3	6	36	74
DH408044	4.4	6	36	74
DH408045	4.5	6	36	74
DH408046	4.6	6	36	74
DH408047	4.7	6	36	74
DH408048	4.8	6	44	82
DH408049	4.9	6	44	82
DH408050	5.0	6	44	82
DH408051	5.1	6	44	82
DH408052	5.2	6	44	82
DH408053	5.3	6	44	82
DH408054	5.4	6	44	82
DH408055	5.5	6	44	82
DH408056	5.6	6	44	82
DH408057	5.7	6	44	82

Other shank types are available on your request.

NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

HSS

HSS

i-ONE DRILLS

i-ONE DRILLS

i-DREAM DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

MULTI-1 DRILLS

HPD DRILLS

HPD DRILLS

GOLD-P DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

CENTER DRILLS

SPADE DRILLS

SPADE DRILLS

REAMERS

REAMERS

COUNTER SINKS

COUNTER SINKS

COUNTER BORES

COUNTER BORES

TECHNICAL DATA

TECHNICAL DATA

YG DREAM DRILLS - GENERAL

DH408 SERIES

YG DREAM DRILLS - GENERAL

DH408 SERIES

CARBIDE, DREAM DRILLS with COOLANT HOLES LONG



- **VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL** LANG
- **Forets DREAM DRILLS carbure, avec arrosage central, série longue** LONGUE
- **PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)** LUNGA

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
 - ▶ Self centering and chip breaking by R-thinning
 - ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
 - ▶ Optimized flute shape for strength of drilling and smooth chip evacuation
- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
 - ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
 - ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
 - ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

CARBIDE, DREAM DRILLS with COOLANT HOLES LONG

- **VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL** LANG
- **Forets DREAM DRILLS carbure, avec arrosage central, série longue** LONGUE
- **PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)** LUNGA

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
 - ▶ Self centering and chip breaking by R-thinning
 - ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
 - ▶ Optimized flute shape for strength of drilling and smooth chip evacuation
- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
 - ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
 - ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
 - ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

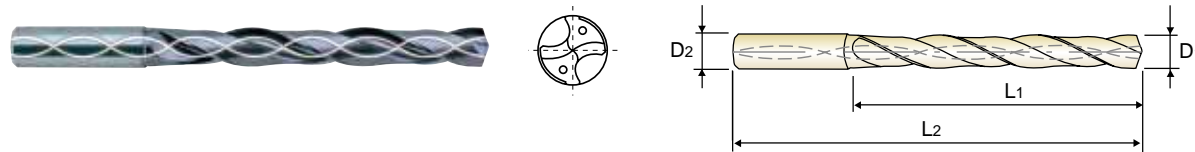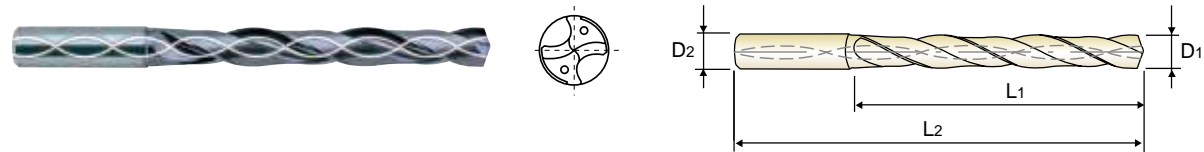

DIN 6537 **CARBIDE** **30°** **h6** **m7** **140°** **20 bar** P.96-97 5 × D

DIN 6537 **CARBIDE** **30°** **h6** **m7** **140°** **20 bar** P.96-97 5 × D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	TiAlN	D1	D2	L1	L2
DH408058	5.8	6	44	82	DH408082	8.2	10	61	103
DH408059	5.9	6	44	82	DH408083	8.3	10	61	103
DH408060	6.0	6	44	82	DH408084	8.4	10	61	103
DH408061	6.1	8	53	91	DH408085	8.5	10	61	103
DH408062	6.2	8	53	91	DH408086	8.6	10	61	103
DH408063	6.3	8	53	91	DH408087	8.7	10	61	103
DH408064	6.4	8	53	91	DH408088	8.8	10	61	103
DH408065	6.5	8	53	91	DH408089	8.9	10	61	103
DH408066	6.6	8	53	91	DH408090	9.0	10	61	103
DH408067	6.7	8	53	91	DH408091	9.1	10	61	103
DH408068	6.8	8	53	91	DH408092	9.2	10	61	103
DH408069	6.9	8	53	91	DH408093	9.3	10	61	103
DH408070	7.0	8	53	91	DH408094	9.4	10	61	103
DH408071	7.1	8	53	91	DH408095	9.5	10	61	103
DH408072	7.2	8	53	91	DH408096	9.6	10	61	103
DH408073	7.3	8	53	91	DH408097	9.7	10	61	103
DH408074	7.4	8	53	91	DH408098	9.8	10	61	103
DH408075	7.5	8	53	91	DH408099	9.9	10	61	103
DH408076	7.6	8	53	91	DH408100	10.0	10	61	103
DH408077	7.7	8	53	91	DH408101	10.1	12	71	118
DH408078	7.8	8	53	91	DH408102	10.2	12	71	118
DH408079	7.9	8	53	91	DH408103	10.3	12	71	118
DH408080	8.0	8	53	91	DH408104	10.4	12	71	118
DH408081	8.1	10	61	103	DH408105	10.5	12	71	118

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	TiAlN	D1	D2	L1	L2
DH408106	10.6	12	71	118	DH408130	13.0	14	77	124
DH408107	10.7	12	71	118	DH408135	13.5	14	77	124
DH408108	10.8	12	71	118	DH408140	14.0	14	77	124
DH408109	10.9	12	71	118	DH408145	14.5	16	83	133
DH408110	11.0	12	71	118	DH408150	15.0	16	83	133
DH408111	11.1	12	71	118	DH408155	15.5	16	83	133
DH408112	11.2	12	71	118	DH408160	16.0	16	83	133
DH408113	11.3	12	71	118	DH408165	16.5	18	93	143
DH408114	11.4	12	71	118	DH408170	17.0	18	93	143
DH408115	11.5	12	71	118	DH408175	17.5	18	93	143
DH408116	11.6	12	71	118	DH408180	18.0	18	93	143
DH408117	11.7	12	71	118	DH408185	18.5	20	101	153
DH408118	11.8	12	71	118	DH408190	19.0	20	101	153
DH408119	11.9	12	71	118	DH408195	19.5	20	101	153
DH408120	12.0	12	71	118	DH408200	20.0	20	101	153
DH408125	12.5	14	77	124					

▶ Other shank types are available on your request.

▶ Other shank types are available on your request. ▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S								H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc																						
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S								H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc																						
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




DH421 SERIES

CARBIDE, DREAM DRILLS with COOLANT HOLES EXTRA LONG

VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL
Forets DREAM DRILLS carbure, avec arrosage central, série extra-longue
PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
Self centering and chip breaking by R-thinning
Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
Optimized flute shape for strength of drilling and smooth chip evacuation

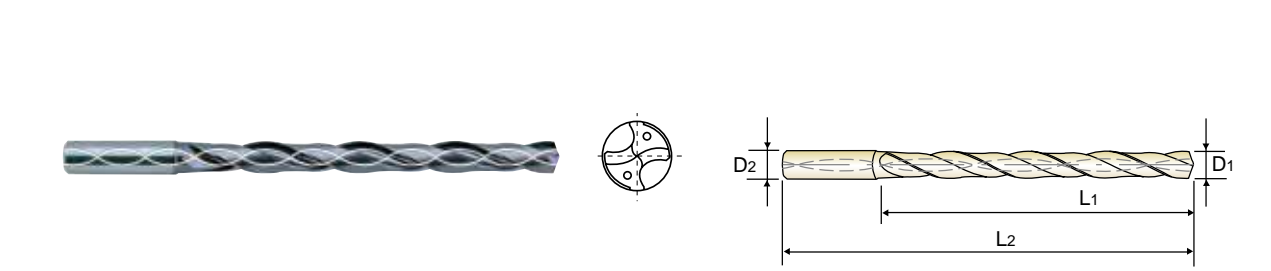

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.96-97 8 x D

Table with columns: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length. Lists models DH421030 to DH421053 and DH421054 to DH421077.

Other shank types are available on your request. NEXT PAGE

ISO material compatibility chart for P, M, K, N, S, H grades. Includes categories like Non-alloy steel, Low alloy steel, High alloyed steel, etc.




DH421 SERIES

CARBIDE, DREAM DRILLS with COOLANT HOLES EXTRA LONG

VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL
Forets DREAM DRILLS carbure, avec arrosage central, série extra-longue
PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

- Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
Self centering and chip breaking by R-thinning
Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
Optimized flute shape for strength of drilling and smooth chip evacuation

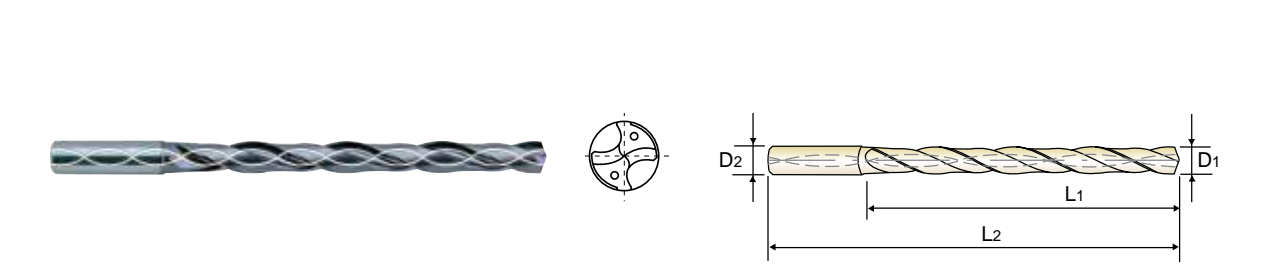

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.96-97 8 x D

Table with columns: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length. Lists models DH421078 to DH421110 and DH421102 to DH421140.

Other shank types are available on your request.

ISO material compatibility chart for P, M, K, N, S, H grades. Includes categories like Non-alloy steel, Low alloy steel, High alloyed steel, etc.

DH404, DH423, DH424 SERIES without COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)			Vc (m/min)	Parameter	Drill Diameter (mm)		
					1.0	2.0				3.0	4.0	5.0
P	1	Non-alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	
	2			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	
	3		RPM	22280	11140	100	RPM	10610	7960	6370		
	4		FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20			
	5		RPM	22280	11140	100	RPM	10610	7960	6370		
	6	FEED	0.03-0.05	0.05-0.07	FEED	0.04-0.10	0.07-0.13	0.10-0.16				
	7	RPM	19100	9550	80	RPM	8490	6370	5090			
	8	FEED	0.03-0.05	0.05-0.07	FEED	0.04-0.10	0.07-0.13	0.10-0.16				
	9	RPM	22280	11140	100	RPM	10610	7960	6370			
	10	FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20				
	11	RPM	19100	9550	80	RPM	8490	6370	5090			
M	12	Stainless steel	35	RPM	19100	9550	80	RPM	8490	6370	5090	
	13			FEED	0.02-0.04	0.03-0.05	FEED	0.04-0.10	0.07-0.13	0.10-0.16		
	14		RPM	15920	7960	70	RPM	7430	5570	4460		
	15		FEED	0.03-0.05	0.05-0.07	FEED	0.03-0.08	0.05-0.11	0.08-0.14			
K	16	Grey cast iron	70	RPM	22280	11140	100	RPM	10610	7960	6370	
	17			FEED	0.04-0.06	0.04-0.06	FEED	0.08-0.14	0.12-0.18	0.18-0.24		
	18	Nodular cast iron	70	RPM	20690	10350	80	RPM	8490	6370	5090	
	19			FEED	0.04-0.06	0.04-0.06	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
	20	Malleable cast iron	50	RPM	22280	11140	100	RPM	10610	7960	6370	
21	FEED			0.04-0.06	0.04-0.06	FEED	0.08-0.14	0.12-0.18	0.18-0.24			
N	22	Aluminum-wrought alloy	70	RPM	15920	7960	70	RPM	7430	5570	4460	
	23			FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
	24	Aluminum-cast, alloyed	70	RPM	19100	9550	80	RPM	8490	6370	5090	
	25			FEED	0.04-0.06	0.04-0.06	FEED	0.08-0.14	0.12-0.18	0.18-0.24		
	26	Copper and Copper Alloys (Bronze / Brass)	60	RPM	15920	7960	70	RPM	7430	5570	4460	
	27			FEED	0.04-0.06	0.04-0.06	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
	28	Non Metallic Materials	50	RPM	22280	11140	100	RPM	10610	7960	6370	
	29			FEED	0.04-0.06	0.04-0.06	FEED	0.08-0.14	0.12-0.18	0.18-0.24		
	30	Heat Resistant Super Alloys	50	RPM	15920	7960	70	RPM	7430	5570	4460	
	31			FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
S	32	Titanium Alloys	50	RPM	22280	11140	100	RPM	10610	7960	6370	
	33			FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
	34	Hardened steel	50	RPM	15920	7960	70	RPM	7430	5570	4460	
	35			FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
H	36	Chilled Cast Iron	50	RPM	22280	11140	100	RPM	10610	7960	6370	
	37			FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20		
40	Hardened Cast Iron	50	RPM	15920	7960	70	RPM	7430	5570	4460		
41			FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20			

► Recommend to reduce the feed rate as following
Feed 100% : DH404(3xD), DH423(3xD), DH424(5xD)

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm)							
		6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
1									
2	RPM	5310	3980	3180	2650	2270	1990	1770	1590
2	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
3	RPM	5310	3980	3180	2650	2270	1990	1770	1590
3	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
4	RPM	5310	3980	3180	2650	2270	1990	1770	1590
4	FEED	0.12-0.18	0.14-0.2	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
5	RPM	4240	3180	2550	2120	1820	1590	1410	1270
5	FEED	0.12-0.18	0.14-0.2	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
6	RPM	5310	3980	3180	2650	2270	1990	1770	1590
6	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
7	RPM	4240	3180	2550	2120	1820	1590	1410	1270
7	FEED	0.12-0.24	0.16-0.28	0.20-0.30	0.21-0.30	0.22-0.35	0.25-0.36	0.28-0.38	0.30-0.40
8	RPM	4240	3180	2550	2120	1820	1590	1410	1270
8	FEED	0.12-0.18	0.14-0.2	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
9	RPM	2120	1590	1270	1060	910	800	710	640
9	FEED	0.10-0.16	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26	0.18-0.28
10	RPM	3710	2790	2230	1860	1590	1390	1240	1110
10	FEED	0.12-0.18	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
11	RPM	2120	1590	1270	1060	910	800	710	640
11	FEED	0.10-0.16	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26	0.18-0.28
12	RPM	3710	2790	2230	1860	1590	1390	1240	1110
12	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
13	RPM	2390	1790	1430	1190	1020	900	800	720
13	FEED	0.12-0.18	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
14									
15	RPM	5310	3980	3180	2650	2270	1990	1770	1590
15	FEED	0.14-0.26	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44
16	RPM	4240	3180	2550	2120	1820	1590	1410	1270
16	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
17	RPM	5310	3980	3180	2650	2270	1990	1770	1590
17	FEED	0.14-0.26	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44
18	RPM	3710	2790	2230	1860	1590	1390	1240	1110
18	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
19	RPM	4240	3180	2550	2120	1820	1590	1410	1270
19	FEED	0.14-0.26	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44
20	RPM	3710	2790	2230	1860	1590	1390	1240	1110
20	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
21									
22									
23									
24									
25									
26									
27									
28									
29									
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									
41									

DH406, DH408, DH421 SERIES with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)			Vc (m/min)	Parameter	Drill Diameter (mm)		
					1.0	2.0				3.0	4.0	5.0
P	1	Non-alloy steel	80	RPM	25460	12730	110	RPM	11670	8750	7000	
	2			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	
	3		RPM	25460	12730	110	RPM	11670	8750	7000		
	4		FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20			
	5		RPM	25460	12730	110	RPM	11670	8750	7000		
	6	FEED	0.03-0.05	0.05-0.07	FEED	0.04-0.10	0.07-0.13	0.10-0.16				
	7	RPM	22280	11140	90	RPM	9550	7160	5730			
	8	FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16			
	9	RPM	25460	12730	110	RPM	11670	8750	7000			
	10	FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20			
	11	RPM	22280	11140	90	RPM	9550	7160	5730			
12	FEED	0.03-0.05	0.05-0.07	FEED		0.06-0.12	0.08-0.14	0.14-0.20				
M	13	Stainless steel	45	RPM	14320	7160	55	RPM	5840	4380	3500	
	14			FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	
	15			RPM	25460	12730		110	RPM	11670	8750	7000
K	16	Grey cast iron	80	FEED	0.04-0.06	0.04-0.06	95	FEED	0.08-0.14	0.12-0.18	0.18-0.24	
	17			RPM	23870	11940		RPM	10080	7560	6050	
	18	Nodular cast iron	90	FEED	0.04-0.06	0.04-0.06	120	FEED	0.06-0.12	0.08-0.14	0.14-0.2	
	19			RPM	28650	14320		RPM	12730	9550	7640	
	20	Malleable cast iron	60	FEED	0.04-0.06	0.04-0.06	80	FEED	0.08-0.14	0.12-0.18	0.18-0.24	
	21			RPM	19100	9550		RPM	8490	6370	5090	
N	22	Aluminum-wrought alloy	80	FEED	0.03-0.05	0.05-0.07	80	FEED	0.06-0.12	0.08-0.14	0.14-0.20	
	23			RPM	25460	12730		110	RPM	11670	8750	7000
	24	Aluminum-cast, alloyed	75	FEED	0.04-0.06	0.04-0.06	95	FEED	0.06-0.12	0.08-0.14	0.14-0.2	
	25			RPM	23870	11940		RPM	10080	7560	6050	
	26	Copper and Copper Alloys (Bronze / Brass)	90	FEED	0.04-0.06	0.04-0.06	120	FEED	0.08-0.14	0.12-0.18	0.18-0.24	
	27			RPM	19100	9550		RPM	8490	6370	5090	
	28	Non Metallic Materials	60	FEED	0.04-0.06	0.04-0.06	80	FEED	0.06-0.12	0.08-0.14	0.14-0.2	
	29			RPM	22280	11140		RPM	9550	7160	5730	
	30	Heat Resistant Super Alloys	70	FEED	0.04-0.06	0.04-0.06	90	FEED	0.08-0.14	0.12-0.18	0.18-0.24	
	31			RPM	19100	9550		RPM	8490	6370	5090	
S	32	Titanium Alloys	60	FEED	0.03-0.05	0.05-0.07	80	FEED	0.06-0.12	0.08-0.14	0.14-0.20	
	33			RPM	25460	12730		110	RPM	11670	8750	7000
	34			FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	
	35			RPM	25460	12730		110	RPM	11670	8750	7000
	36			FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	
H	37	Hardened steel	80	RPM	22280	11140	90	RPM	9550	7160	5730	
	38			FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	
	39			RPM	12730	6370		50	RPM	5310	3980	3180
	40			FEED	0.02-0.04	0.03-0.05			FEED	0.03-0.08	0.05-0.11	0.08-0.14
	41			RPM	19100	9550		80	RPM	8490	6370	5090

► Recommend to reduce the feed rate as following
Feed 100% : DH406(3xD), DH408(5xD) Feed 75% : DH421(8xD)


VDI 3323	Parameter	Drill Diameter (mm)							
		6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
1									
2	RPM	5840	4380	3500	2920	2500	2190	1950	1750
3	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
4	RPM	5840	4380	3500	2920	2500	2190	1950	1750
5	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
6	RPM	5840	4380	3500	2920	2500	2190	1950	1750
7	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
8	RPM	4770	3580	2860	2390	2050	1790	1590	1430
9	FEED	0.12-0.18	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
10	RPM	5840	4380	3500	2920	2500	2190	1950	1750
11	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
12	RPM	4770	3580	2860	2390	2050	1790	1590	1430
13	FEED	0.12-0.18	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
14									
15	RPM	5840	4380	3500	2920	2500	2190	1950	1750
16	FEED	0.14-0.26	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44
17	RPM	5040	3780	3020	2520	2160	1890	1680	1510
18	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
19	RPM	6370	4770	3820	3180	2730	2390	2120	1910
20	FEED	0.14-0.26	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44
21	RPM	4240	3180	2550	2120	1820	1590	1410	1270
22	FEED	0.16-0.22	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
23									
24									
25									
26									
27									
28									
29									
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									
41									



Leading Through Innovation



Global Cutting Tool Leader **YG-1**

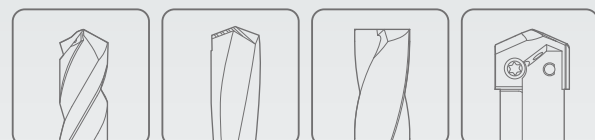

HOLEMAKING

SOLID CARBIDE

DREAM DRILLS -HIGH FEED DREAM DRILLS - HIGH FEED

- 1.5 to 2 Times Faster Feeding Speed than 2-Flute Drill
For Carbon Steels, Alloy Steels(up to HRc35) and Cast Iron
- 1,5 bis 2 mal höhere Vorschubgeschwindigkeit als Bohrer mit 2 Schneiden,
für Kohlenstoffstähle, legierte Stähle (bis HRc35) und Grauguss

SELECTION GUIDE




SERIES	DGR493	DGR495
DRILLING DEPTH	3XD	5XD
LENGTH	SHORT	LONG
SIZE MIN	D5.0	D5.0
SIZE MAX	D20.0	D20.0
PAGE	101	103

SURFACE TREATMENT H-Coating

SOLID CARBIDE DREAM DRILLS HIGH FEED

1.5 to 2 Times Faster Feeding Speed than 2-Flute Drill for Carbon Steels, Alloy Steels(up to HRC35) and Cast Iron

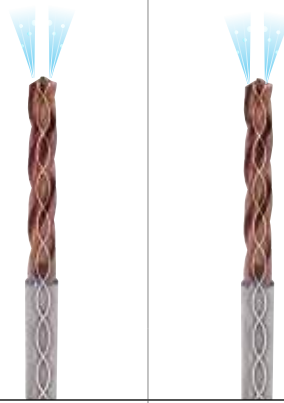

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.105

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRC		
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎
	5	About 0.75% C Quenched & Tempered	300	32	○	○	
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	◎	◎
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	◎
	11	Quenched & Tempered	325	35	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		
	13		Martensitic Quenched & Tempered	240	23		
	14	Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3	◎	◎
	18		Pearlitic	250	25	○	○
	19		Ferritic	130		◎	◎
20	Malleable cast iron	Pearlitic	230	21	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60			
	22		Curable Hardened	100			
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			
	24		≤ 12% Si, Curable Hardened	90			
	25		> 12% Si, Not Curable	130			
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110			
	27		CuZn, CuSnZn (Brass)	90			
	28		CuSn, lead-free copper and electrolytic copper	100			
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Cured	350	38		
	35	Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Hardened Cast Iron	Cast	400	42		
	41		Hardened	550	55		



Y&G DREAM DRILLS - HIGH FEED

DGR493 SERIES

CARBIDE, DREAM DRILLS - HIGH FEED with COOLANT HOLES **SHORT**
 DREAM DRILLS HIGH FEED mit KÜHLKANAL **KURZ**
 Forets DREAM DRILLS carbure Grande Avance avec arrosage central, série courte **COURTE**
 PUNTE DREAM DRILL HIGH FEED (con i fori di refrigerazione) **CORTA**

- ▶ Drilling for Carbon Steels, Alloy Steels(-HRC35) and Cast Iron
- ▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
- ▶ Multi-Layer coating delivers much better productivity and reliability
- ▶ Self centering and chip breaking by R-thinning and coolant holes

- ▶ Bohren von Kohlenstoff-Stählen, legierten Stählen(-HRC35) und Gusseisen
- ▶ Höhere Produktivität durch den 1,5 bis 2-fach höheren Vorschub gegenüber herkömmlichen zweischneidigen Bohrern
- ▶ Die Multi-Layer Beschichtung ermöglicht eine bessere Produktivität und Zuverlässigkeit
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung

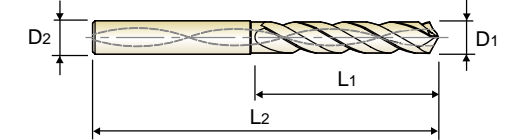

3 x D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
DGR493050	5.0	6	28	66	DGR493074	7.4	8	41	79
DGR493051	5.1	6	28	66	DGR493075	7.5	8	41	79
DGR493052	5.2	6	28	66	DGR493076	7.6	8	41	79
DGR493053	5.3	6	28	66	DGR493077	7.7	8	41	79
DGR493054	5.4	6	28	66	DGR493078	7.8	8	41	79
DGR493055	5.5	6	28	66	DGR493079	7.9	8	41	79
DGR493056	5.6	6	28	66	DGR493080	8.0	8	41	79
DGR493057	5.7	6	28	66	DGR493081	8.1	10	47	89
DGR493058	5.8	6	28	66	DGR493082	8.2	10	47	89
DGR493059	5.9	6	28	66	DGR493083	8.3	10	47	89
DGR493060	6.0	6	28	66	DGR493084	8.4	10	47	89
DGR493061	6.1	8	34	79	DGR493085	8.5	10	47	89
DGR493062	6.2	8	34	79	DGR493086	8.6	10	47	89
DGR493063	6.3	8	34	79	DGR493087	8.7	10	47	89
DGR493064	6.4	8	34	79	DGR493088	8.8	10	47	89
DGR493065	6.5	8	34	79	DGR493089	8.9	10	47	89
DGR493066	6.6	8	34	79	DGR493090	9.0	10	47	89
DGR493067	6.7	8	34	79	DGR493091	9.1	10	47	89
DGR493068	6.8	8	34	79	DGR493092	9.2	10	47	89
DGR493069	6.9	8	34	79	DGR493093	9.3	10	47	89
DGR493070	7.0	8	34	79	DGR493094	9.4	10	47	89
DGR493071	7.1	8	41	79	DGR493095	9.5	10	47	89
DGR493072	7.2	8	41	79	DGR493096	9.6	10	47	89
DGR493073	7.3	8	41	79	DGR493097	9.7	10	47	89

▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	42	45	48	50	55	58	60	62	65	68	70	72	75	78
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400Rm	1050Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					



DGR495 SERIES



RECOMMENDED CUTTING CONDITIONS
EMPOHLENE SCHNEIDPARAMETER


CARBIDE, DREAM DRILLS - HIGH FEED with COOLANT HOLES LONG

DREAM DRILLS HIGH FEED mit KÜHLKANAL
Forets DREAM DRILLS carbure Grande Avance avec arrosage central, série longue
PUNTE DREAM DRILL HIGH FEED (con i fori di refrigerazione)

Bohren von Kohlenstoff-Stählen, legierten Stählen(-HRc35) und Gusseisen
Höhere Produktivität durch den 1,5 bis 2-fach höheren Vorschub gegenüber herkömmlichen zweischneidigen Bohrern
Die Multi-Layer Beschichtung ermöglicht eine bessere Produktivität und Zuverlässigkeit
Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung

- ▶ Drilling for Carbon Steels, Alloy Steels(-HRc35) and Cast Iron
- ▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
- ▶ Multi-Layer coating delivers much better productivity and reliability
- ▶ Self centering and chip breaking by R-thinning and coolant holes

- ▶ Bohren von Kohlenstoff-Stählen, legierten Stählen(-HRc35) und Gusseisen
- ▶ Höhere Produktivität durch den 1,5 bis 2-fach höheren Vorschub gegenüber herkömmlichen zweischneidigen Bohrern
- ▶ Die Multi-Layer Beschichtung ermöglicht eine bessere Produktivität und Zuverlässigkeit
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung

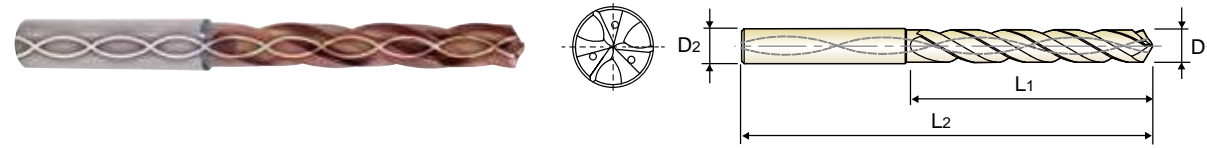

5 × D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
H-Coating	D1	D2	L1	L2
DGR495098	9.8	10	61	103
DGR495099	9.9	10	61	103
DGR495100	10.0	10	61	103
DGR495101	10.1	12	71	118
DGR495102	10.2	12	71	118
DGR495103	10.3	12	71	118
DGR495104	10.4	12	71	118
DGR495105	10.5	12	71	118
DGR495106	10.6	12	71	118
DGR495107	10.7	12	71	118
DGR495108	10.8	12	71	118
DGR495109	10.9	12	71	118
DGR495110	11.0	12	71	118
DGR495111	11.1	12	71	118
DGR495112	11.2	12	71	118
DGR495113	11.3	12	71	118
DGR495114	11.4	12	71	118
DGR495115	11.5	12	71	118
DGR495116	11.6	12	71	118
DGR495117	11.7	12	71	118

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
H-Coating	D1	D2	L1	L2
DGR495118	11.8	12	71	118
DGR495119	11.9	12	71	118
DGR495120	12.0	12	71	118
DGR495125	12.5	14	77	124
DGR495130	13.0	14	77	124
DGR495135	13.5	14	77	124
DGR495140	14.0	14	77	124
DGR495145	14.5	16	83	133
DGR495150	15.0	16	83	133
DGR495155	15.5	16	83	133
DGR495160	16.0	16	83	133
DGR495165	16.5	18	93	143
DGR495170	17.0	18	93	143
DGR495175	17.5	18	93	143
DGR495180	18.0	18	93	143
DGR495185	18.5	20	101	153
DGR495190	19.0	20	101	153
DGR495195	19.5	20	101	153
DGR495200	20.0	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P								M					K						
	Non-alloy steel				Low alloy steel				High alloy steel, and tool steel		Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○	

ISO Material Description	N						S						H								
	Aluminum- wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

DGR493, DGR495 SERIES with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.


ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)																		
					5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0										
P	1	Non-alloy steel	100	RPM	6370	5310	3980	3180	2650	2270	1990	1770	1590	FEED	0.2-0.25	0.24-0.3	0.32-0.4	0.4-0.5	0.48-0.6	0.56-0.7	0.56-0.72	0.63-0.81	0.7-0.88
	2			RPM	6370	5310	3980	3180	2650	2270	1990	1770	1590	FEED	0.2-0.25	0.24-0.3	0.32-0.4	0.4-0.5	0.48-0.6	0.56-0.7	0.56-0.72	0.63-0.81	0.7-0.88
	3			RPM	6370	5310	3980	3180	2650	2270	1990	1770	1590	FEED	0.16-0.21	0.2-0.26	0.26-0.34	0.34-0.42	0.41-0.47	0.47-0.54	0.47-0.55	0.5-0.59	0.54-0.67
	4			RPM	5090	4240	3180	2550	2120	1820	1590	1410	1270	FEED	0.16-0.21	0.2-0.26	0.26-0.34	0.34-0.42	0.41-0.47	0.47-0.54	0.47-0.55	0.5-0.59	0.54-0.67
	5			RPM	6370	5310	3980	3180	2650	2270	1990	1770	1590	FEED	0.2-0.25	0.24-0.3	0.32-0.4	0.4-0.5	0.48-0.54	0.56-0.63	0.56-0.64	0.63-0.72	0.68-0.81
	6			RPM	5090	4240	3180	2550	2120	1820	1590	1410	1270	FEED	0.2-0.25	0.24-0.3	0.32-0.4	0.4-0.5	0.48-0.54	0.56-0.63	0.56-0.64	0.63-0.72	0.68-0.81
	7			RPM	5090	4240	3180	2550	2120	1820	1590	1410	1270	FEED	0.16-0.21	0.2-0.26	0.26-0.34	0.34-0.42	0.41-0.47	0.47-0.54	0.47-0.55	0.5-0.59	0.54-0.67
	8			RPM	4460	3710	2790	2230	1860	1590	1390	1240	1110	FEED	0.13-0.18	0.16-0.22	0.21-0.29	0.26-0.36	0.32-0.38	0.36-0.43	0.36-0.43	0.38-0.47	0.41-0.54
	9			RPM	4460	3710	2790	2230	1860	1590	1390	1240	1110	FEED	0.16-0.21	0.2-0.26	0.26-0.34	0.34-0.42	0.41-0.47	0.47-0.54	0.47-0.55	0.5-0.59	0.54-0.67
	10			RPM	2550	2120	1590	1270	1060	910	800	710	640	FEED	0.13-0.18	0.16-0.22	0.21-0.29	0.26-0.36	0.32-0.38	0.36-0.43	0.36-0.43	0.38-0.47	0.41-0.54
	11			RPM	2550	2120	1590	1270	1060	910	800	710	640	FEED	0.13-0.18	0.16-0.22	0.21-0.29	0.26-0.36	0.32-0.38	0.36-0.43	0.36-0.43	0.38-0.47	0.41-0.54
M	12	Stainless steel																					
	13																						
	14																						
K	15	Grey cast iron	RPM	6370	5310	3980	3180	2650	2270	1990	1770	1590	FEED	0.23-0.30	0.27-0.36	0.36-0.48	0.45-0.60	0.54-0.72	0.63-0.84	0.64-0.80	0.72-0.90	0.80-0.98	
	16		RPM	5090	4240	3180	2550	2120	1820	1590	1410	1270	FEED	0.20-0.25	0.24-0.30	0.32-0.40	0.40-0.50	0.48-0.60	0.56-0.70	0.56-0.72	0.63-0.81	0.70-0.90	
	17		RPM	6370	5310	3980	3180	2650	2270	1990	1770	1590	FEED	0.23-0.30	0.27-0.36	0.36-0.48	0.45-0.60	0.54-0.72	0.63-0.84	0.64-0.80	0.72-0.90	0.80-0.98	
	18		RPM	4460	3710	2790	2230	1860	1590	1390	1240	1110	FEED	0.20-0.25	0.24-0.30	0.32-0.40	0.40-0.50	0.48-0.60	0.56-0.70	0.56-0.72	0.63-0.81	0.70-0.90	
	19		RPM	5090	4240	3180	2550	2120	1820	1590	1410	1270	FEED	0.23-0.30	0.27-0.36	0.36-0.48	0.45-0.60	0.54-0.72	0.63-0.84	0.64-0.80	0.72-0.90	0.80-0.98	
N	20	Malleable cast iron	RPM	4460	3710	2790	2230	1860	1590	1390	1240	1110	FEED	0.20-0.25	0.24-0.30	0.32-0.40	0.40-0.50	0.48-0.60	0.56-0.70	0.56-0.72	0.63-0.81	0.70-0.90	
	21																						
	22																						
	23																						
S	24	Aluminum-cast, alloyed																					
	25																						
	26																						
	27																						
	28																						
	29																						
	30																						
	31																						
H	32	Heat Resistant Super Alloys																					
	33																						
	34																						
	35																						
	36																						
	37																						
H	38	Hardened steel																					
	39																						
	40																						
	41																						



Leading Through Innovation



Global Cutting Tool Leader **YG-1**

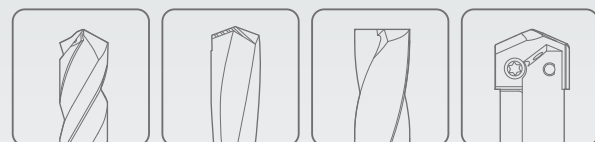

HOLEMAKING



SOLID CARBIDE

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS - FLACHBOHRER

- For Holes on Various Angled Surfaces
- Für Bohrungen auf verschiedenen abgewinkelten Oberflächen

SELECTION GUIDE



SERIES	DPP447	DH450
DRILLING DEPTH	2XD	5XD
LENGTH	SHORT	LONG
SIZE MIN	D3.0	D3.0
SIZE MAX	D20.0	D20.0
PAGE	110	113
SURFACE TREATMENT	X-Coating	TiAIN

SOLID CARBIDE DREAM DRILLS FLAT BOTTOM

For Holes on Various Angled Surfaces

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.116

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	
	4		About 0.75% C Annealed	270	28	○	○	
	5		About 0.75% C Quenched & Tempered	300	32	○	○	
	6	Low alloy steel	Annealed	180	10	◎	◎	
	7		Quenched & Tempered	275	29	○	○	
	8		Quenched & Tempered	300	32	○	○	
	9		Quenched & Tempered	350	38	○	○	
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11			Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	
	13		Martensitic Quenched & Tempered	240	23			
	14	Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19	Malleable cast iron	Ferritic	130				
	20		Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	
	22		Curable Hardened	100		○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100				
	29		Duroplastic, Fiber Reinforced Plastic					
	30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15		
	32			Cured	280	30		
	33		Annealed	250	25			
	34		Cured	350	38			
	35	Titanium Alloys	Ni or Co Based	Cast	320	34		
	36			Pure Titanium	400 Rm			
	37			Alpha + Beta Alloys	Hardened	1050 Rm		
H	38	Hardened steel		Hardened	550	55		
	39			Hardened	630	60		
	40	Hardened Cast Iron		Cast	400	42		
	41			Hardened	550	55		



Only One Operation for Angled Surface

For angled surfaces, two operations are required to drill in a conventional process

1st operation (End mill)
Counter boring to make flat surface and guide hole

2nd operation (Drill)
Drilling to required depth of hole

For angled surfaces, only one operation can complete the drilling with Dream Drill Flat Bottom

One operation (Dream Drill Flat Bottom)
One Drill does it all without using both an end mill and a drill

Pilot Drilling for 5 X D

1. FLAT SURFACE

Pilot Drill (Flat Bottom 2xD) → Dream Drill Flat Bottom (5xD)

2. INCLINED SURFACE

Pilot Drill (Flat Bottom 2xD or End Mill) → Dream Drill Flat Bottom (5xD)

- ▶ For Flat bottom 5xD drilling depth, Slope surface needs Pilot Drilling with YG-1 Flat Bottom Drill (2XD) and Flat surface needs Pilot Drilling with YG-1 Dream Drill General.
- ▶ Pilot Drilling Depth : around 1XD
- ▶ Pilot Drilling Diameter : same size diameter

YMG DREAM DRILLS - FLAT BOTTOM


DPP447 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM SHORT

- VHM, DREAM DRILLS - FLACHBOHRER
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- PUNTE IN MD DREAM DRILLS, TESTA PIANA

- For holes on various angled surfaces.
- 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- Optimized flute shape for excellent chip evacuation.
- High strength cutting edge to improve tool life and versatility drilling.
- For through holes, minimized burrs at entrance and exit when drilling thin plate.

- Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- Optimierte Nutenform für hervorragende Spanabfuhr.
- Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.

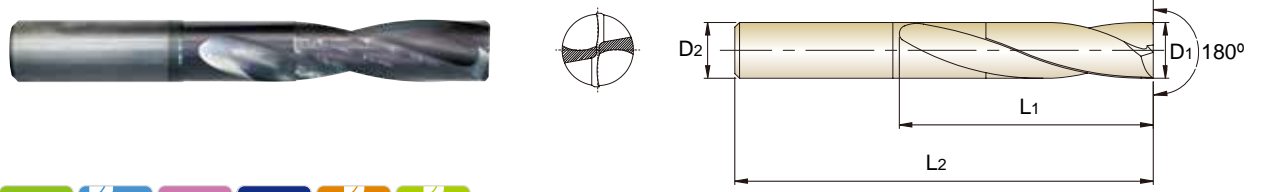

CARBIDE 20° h6 h7 180° P.116 2 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2
DPP447150	15.0	16	62	105
DPP447155	15.5	16	64	115
DPP447160	16.0	16	64	115
DPP447165	16.5	18	70	125
DPP447170	17.0	18	70	125
DPP447175	17.5	18	70	125

Other diameters and shank types are available upon request.

© : Excellent ○ : Good

ISO	P										M				K										
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRC	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	210	210	210	210	210
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N					S										H																			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron										
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55
HRC	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	550	630	400	550										
Recommended	○	○																																	

YMG DREAM DRILLS - FLAT BOTTOM


DH450 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- PUNTE IN MD DREAM DRILLS, TESTA PIANA

- For holes on various angled surfaces.
- 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- Optimized flute shape for excellent chip evacuation.
- High strength cutting edge to improve tool life and versatility drilling.
- For through holes, minimized burrs at entrance and exit when drilling thin plate.
- CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- Pilot Drilling for 5XD

- Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- Optimierte Nutenform für hervorragende Spanabfuhr.
- Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel nit Kühlkanalbohrungen
- Pilotbohren 5XD

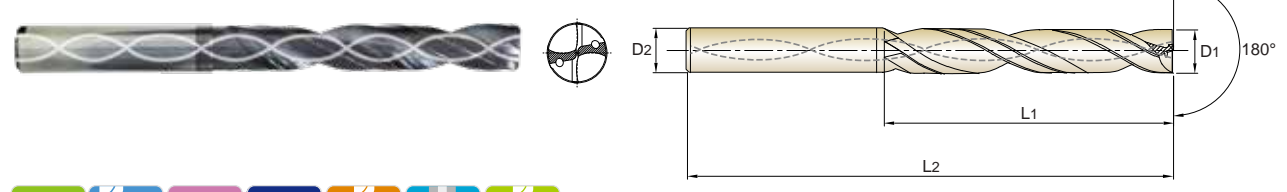

CARBIDE 30° h6 h7 180° 20 bar P.117 5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450030	3.0	6	28	66
DH450031	3.1	6	28	66
DH450032	3.2	6	28	66
DH450033	3.3	6	28	66
DH450034	3.4	6	28	66
DH450035	3.5	6	28	66
DH450036	3.6	6	28	66
DH450037	3.7	6	28	66
DH450038	3.8	6	36	74
DH450039	3.9	6	36	74
DH450040	4.0	6	36	74
DH450041	4.1	6	36	74
DH450042	4.2	6	36	74
DH450043	4.3	6	36	74
DH450044	4.4	6	36	74
DH450045	4.5	6	36	74
DH450046	4.6	6	36	74
DH450047	4.7	6	36	74
DH450048	4.8	6	44	82
DH450049	4.9	6	44	82
DH450050	5.0	6	44	82
DH450051	5.1	6	44	82

Other diameters and shank types are available upon request.

NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K										
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRC	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	210	210	210	210	210
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N					S										H																			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron										
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55
HRC	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	550	630	400	550										
Recommended	○	○																																	

YMG DREAM DRILLS - FLAT BOTTOM

DH450 SERIES


CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- PUNTE IN MD DREAM DRILLS, TESTA PIANA

KURZ
LONGUE
LUNGA

- For holes on various angled surfaces.
- 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- Optimized flute shape for excellent chip evacuation.
- High strength cutting edge to improve tool life and versatility drilling.
- For through holes, minimized burrs at entrance and exit when drilling thin plate.
- CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- Pilot Drilling for 5XD

- Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- Optimierte Nutenform für hervorragende Spanabfuhr.
- Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- Pilotbohren 5XD

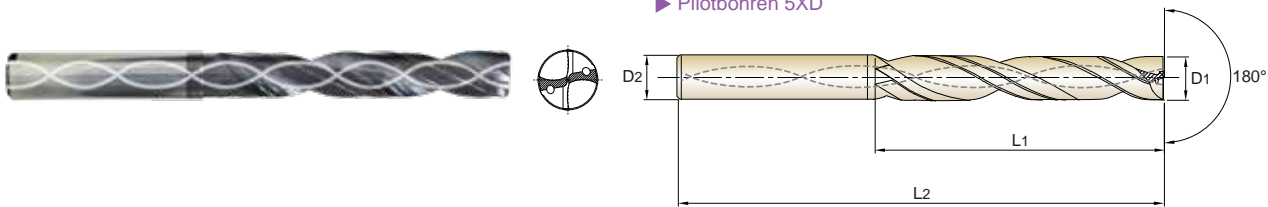

5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450074	7.4	8	53	91
DH450075	7.5	8	53	91
DH450076	7.6	8	53	91
DH450077	7.7	8	53	91
DH450078	7.8	8	53	91
DH450079	7.9	8	53	91
DH450080	8.0	8	53	91
DH450081	8.1	10	61	103
DH450082	8.2	10	61	103
DH450083	8.3	10	61	103
DH450084	8.4	10	61	103
DH450085	8.5	10	61	103
DH450086	8.6	10	61	103
DH450087	8.7	10	61	103
DH450088	8.8	10	61	103
DH450089	8.9	10	61	103
DH450090	9.0	10	61	103
DH450091	9.1	10	61	103
DH450092	9.2	10	61	103
DH450093	9.3	10	61	103
DH450094	9.4	10	61	103
DH450095	9.5	10	61	103

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450096	9.6	10	61	103
DH450097	9.7	10	61	103
DH450098	9.8	10	61	103
DH450099	9.9	10	61	103
DH450100	10.0	10	61	103
DH450102	10.2	12	71	118
DH450105	10.5	12	71	118
DH450108	10.8	12	71	118
DH450110	11.0	12	71	118
DH450115	11.5	12	71	118
DH450118	11.8	12	71	118
DH450119	11.9	12	71	118
DH450120	12.0	12	71	118
DH450125	12.5	14	77	124
DH450130	13.0	14	77	124
DH450135	13.5	14	77	124
DH450140	14.0	14	77	124
DH450145	14.5	16	83	133
DH450150	15.0	16	83	133
DH450155	15.5	16	83	133
DH450160	16.0	16	83	133
DH450165	16.5	18	93	143

Other diameters and shank types are available upon request.

▶ NEXT PAGE

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

YMG DREAM DRILLS - FLAT BOTTOM

DH450 SERIES


CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- PUNTE IN MD DREAM DRILLS, TESTA PIANA

KURZ
LONGUE
LUNGA

- For holes on various angled surfaces.
- 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- Optimized flute shape for excellent chip evacuation.
- High strength cutting edge to improve tool life and versatility drilling.
- For through holes, minimized burrs at entrance and exit when drilling thin plate.
- CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- Pilot Drilling for 5XD

- Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- Optimierte Nutenform für hervorragende Spanabfuhr.
- Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- Pilotbohren 5XD

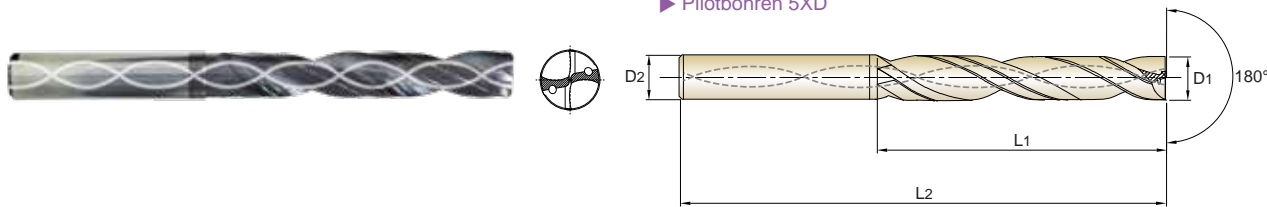


5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450170	17.0	18	93	143
DH450175	17.5	18	93	143
DH450180	18.0	18	93	143
DH450185	18.5	20	101	153

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450190	19.0	20	101	153
DH450195	19.5	20	101	153
DH450200	20.0	20	101	153

Other diameters and shank types are available upon request.

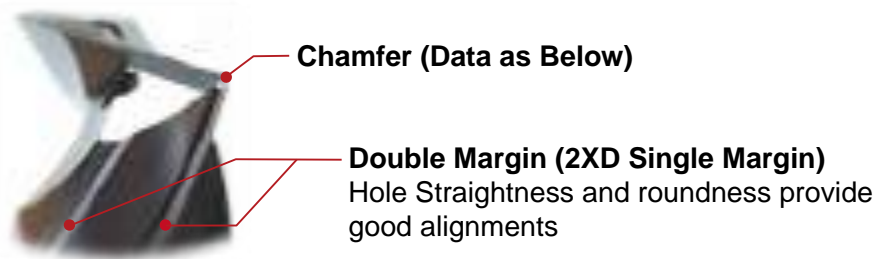

Drill Diameter (mm)	Corner Chamfer (mm)
Ø3.0 ~ Ø6.0	0.06
Ø6.1 ~ Ø10.0	0.12
Ø10.1 ~ Ø14.0	0.18
Ø14.1 ~ Ø20.0	0.26

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			


YG DREAM DRILLS - FLAT BOTTOM

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER


VARIETY OF DRILLING Arten von Bohrungen




Inclined Entry



Inclined Exit




Counter Boring

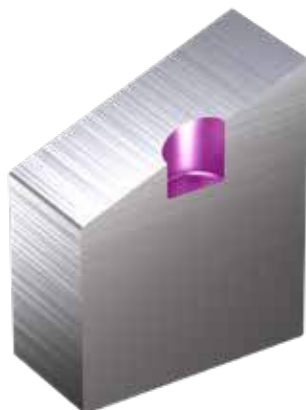


Guide Drilling



Cross Drilling

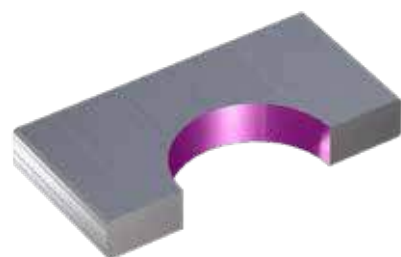

Thin Plate



Curved Surface



Chained Hole



Blind Hole for Threading



Leading Through Innovation



SOLID CARBIDE

DREAM DRILLS -INOX DREAM DRILLS - INOX

- For Tough Materials like Stainless Steels, Nickel Alloys and Titanium
- Für schwierig zerspanbare Materialien wie Edelstahl, Nickellegierungen und Titan.

SELECTION GUIDE



SERIES	DH451	DH452	DH453
DRILLING DEPTH	3XD	5XD	8XD
LENGTH	SHORT	LONG	EXTRA LONG
SIZE MIN	D3.0	D1.0	D3.0
SIZE MAX	D20.0	D20.0	D14.0
PAGE	121	124	127

SURFACE TREATMENT TiAIN

SOLID CARBIDE DREAM DRILLS INOX


For Tough Materials like Stainless Steels, Nickel Alloys and Titanium

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.129


ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125				
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○
	4		About 0.75% C Annealed	270	28			
	5	About 0.75% C Quenched & Tempered	300	32				
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	○	○	○
	8		Quenched & Tempered	300	32			
	9	High alloyed steel, and tool steel	Quenched & Tempered	350	38			
	10		Annealed	200	15			
	11		Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	◎	◎
	13		Martensitic Quenched & Tempered	240	23	◎	◎	◎
	14	Austenitic	180	10	◎	◎	◎	
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19	Malleable cast iron	Ferritic	130				
20	Pearlitic		230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	◎
	22		Curable Hardened	100		◎	◎	◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○
	25		> 12% Si, Not Curable	130		○	○	○
	26		Cutting Alloys, PB>1%	110				
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15		
	32			Cured	280	30		
	33		Annealed	250	25			
	34	Titanium Alloys	Ni or Co Based	Cured	350	38		
	35			Cast	320	34		
	36			Pure Titanium	400 Rm			
37	Alpha + Beta Alloys	Hardened	1050 Rm		○	○	○	
H	38	Hardened steel	Hardened		550	55		
	39				630	60		
	40	Hardened Cast Iron	Hardened	Cast	400	42		
	41				550	55		

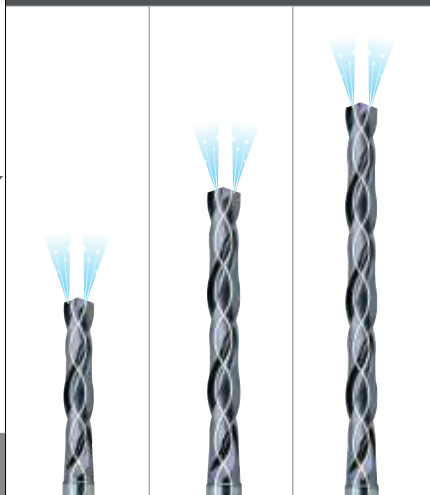

DH451 SERIES

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES **SHORT**
 ● VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL **KURZ**
 ● Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série courte **COURTE**
 ● PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione) **CORTA**

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life
- ▶ Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
- ▶ Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
- ▶ Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
- ▶ TiAIN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

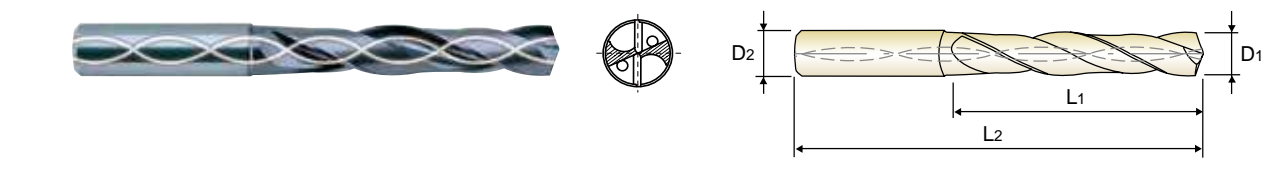

P.129-130 **3 x D**

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH451030	3.0	6	20	62
DH451031	3.1	6	20	62
DH451032	3.2	6	20	62
DH451033	3.3	6	20	62
DH451034	3.4	6	20	62
DH451035	3.5	6	20	62
DH451036	3.6	6	20	62
DH451037	3.7	6	20	62
DH451038	3.8	6	24	66
DH451039	3.9	6	24	66
DH451040	4.0	6	24	66
DH451041	4.1	6	24	66
DH451042	4.2	6	24	66
DH451043	4.3	6	24	66
DH451044	4.4	6	24	66
DH451045	4.5	6	24	66
DH451046	4.6	6	24	66
DH451047	4.7	6	24	66
DH451048	4.8	6	28	66
DH451049	4.9	6	28	66

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH451050	5.0	6	28	66
DH451051	5.1	6	28	66
DH451052	5.2	6	28	66
DH451053	5.3	6	28	66
DH451054	5.4	6	28	66
DH451055	5.5	6	28	66
DH451056	5.6	6	28	66
DH451057	5.7	6	28	66
DH451058	5.8	6	28	66
DH451059	5.9	6	28	66
DH451060	6.0	6	28	66
DH451061	6.1	8	34	79
DH451062	6.2	8	34	79
DH451063	6.3	8	34	79
DH451064	6.4	8	34	79
DH451065	6.5	8	34	79
DH451066	6.6	8	34	79
DH451067	6.7	8	34	79
DH451068	6.8	8	34	79
DH451069	6.9	8	34	79

▶ Other shank types are available on your request. ▶ NEXT PAGE


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	42	48	52	58	62	68	72	78	82	10	12	15	18	21	24
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	◎	◎	◎	◎	◎						

ISO	N							S							H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○											○					

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES *SHORT*

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL *KURZ*
- Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série courte *COURTE*
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione) *CORTA*

- Special flute shape and geometry suitable for machining stainless steel
 - Excellent chip evacuation from better surface treatment
 - Point R-thinning achieves superior centering and chip curling
 - TiAlN coating for better surface finishes and longer tool life
- Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
 - Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
 - Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
 - TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

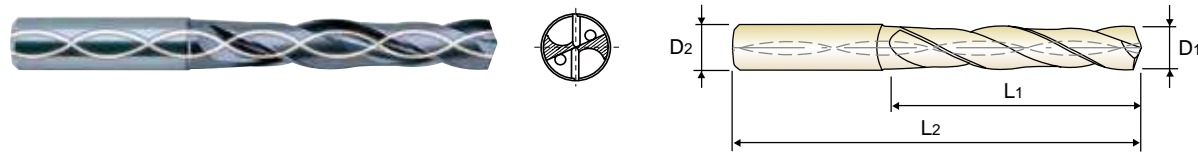

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.129-130 3 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH451070	7.0	8	34	79
DH451071	7.1	8	41	79
DH451072	7.2	8	41	79
DH451073	7.3	8	41	79
DH451074	7.4	8	41	79
DH451075	7.5	8	41	79
DH451076	7.6	8	41	79
DH451077	7.7	8	41	79
DH451078	7.8	8	41	79
DH451079	7.9	8	41	79
DH451080	8.0	8	41	79
DH451081	8.1	10	47	89
DH451082	8.2	10	47	89
DH451083	8.3	10	47	89
DH451084	8.4	10	47	89
DH451085	8.5	10	47	89
DH451086	8.6	10	47	89
DH451087	8.7	10	47	89
DH451088	8.8	10	47	89
DH451089	8.9	10	47	89

► Other shank types are available on your request. ► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES *SHORT*

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL *KURZ*
- Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série courte *COURTE*
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione) *CORTA*

- Special flute shape and geometry suitable for machining stainless steel
 - Excellent chip evacuation from better surface treatment
 - Point R-thinning achieves superior centering and chip curling
 - TiAlN coating for better surface finishes and longer tool life
- Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
 - Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
 - Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
 - TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit



DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.129-130 3 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH451110	11.0	12	55	102
DH451111	11.1	12	55	102
DH451112	11.2	12	55	102
DH451113	11.3	12	55	102
DH451114	11.4	12	55	102
DH451115	11.5	12	55	102
DH451116	11.6	12	55	102
DH451117	11.7	12	55	102
DH451118	11.8	12	55	102
DH451119	11.9	12	55	102
DH451120	12.0	12	55	102
DH451125	12.5	14	60	107
DH451130	13.0	14	60	107
DH451135	13.5	14	60	107

► Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS

HSS



DH452 SERIES

DH452 SERIES

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES LONG


CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL
Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série longue
PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione)

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL
Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série longue
PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione)

- Special flute shape and geometry suitable for machining stainless steel
Excellant chip evacuation from better surface treatment
Point R-thinning achieves superior centering and chip curling
TiAlN coating for better surface finishes and longer tool life

- Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

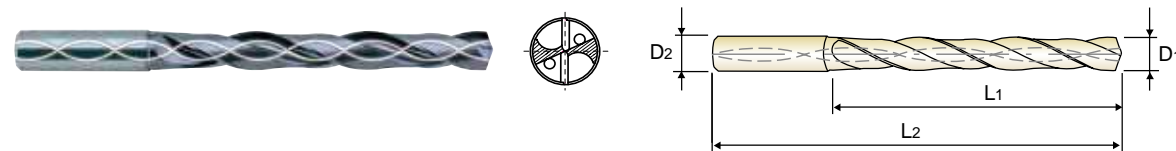

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.129-130 5 x D

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.129-130 5 x D

Table with 5 columns: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their specifications.

Table with 5 columns: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their specifications.

Other shank types are available on your request. NEXT PAGE

Other shank types are available on your request. NEXT PAGE

ISO material compatibility chart for P, M, K, N, S, and H grades. Shows recommended drill bit grades for various materials like non-alloy steel, stainless steel, and titanium alloys.

ISO material compatibility chart for P, M, K, N, S, and H grades. Shows recommended drill bit grades for various materials like non-alloy steel, stainless steel, and titanium alloys.




DH452 SERIES

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL LANG
- Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série longue LONGUE
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione) LUNGA

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAlN coating for better surface finishes and longer tool life
- ▶ Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
- ▶ Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
- ▶ Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
- ▶ TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

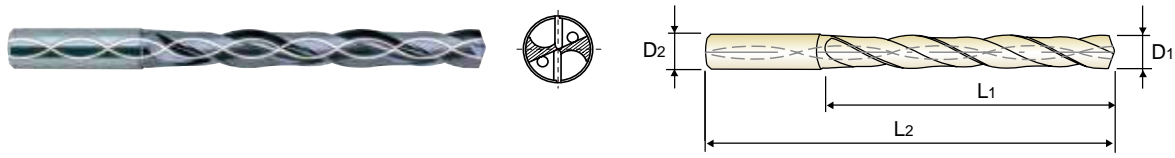

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.129-130 5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
DH452098	9.8	10	61	103	DH452118	11.8	12	71	118
DH452099	9.9	10	61	103	DH452119	11.9	12	71	118
DH452100	10.0	10	61	103	DH452120	12.0	12	71	118
DH452101	10.1	12	71	118	DH452125	12.5	14	77	124
DH452102	10.2	12	71	118	DH452130	13.0	14	77	124
DH452103	10.3	12	71	118	DH452135	13.5	14	77	124
DH452104	10.4	12	71	118	DH452140	14.0	14	77	124
DH452105	10.5	12	71	118	DH452145	14.5	16	83	133
DH452106	10.6	12	71	118	DH452150	15.0	16	83	133
DH452107	10.7	12	71	118	DH452155	15.5	16	83	133
DH452108	10.8	12	71	118	DH452160	16.0	16	83	133
DH452109	10.9	12	71	118	DH452165	16.5	18	93	143
DH452110	11.0	12	71	118	DH452170	17.0	18	93	143
DH452111	11.1	12	71	118	DH452175	17.5	18	93	143
DH452112	11.2	12	71	118	DH452180	18.0	18	93	143
DH452113	11.3	12	71	118	DH452185	18.5	20	101	153
DH452114	11.4	12	71	118	DH452190	19.0	20	101	153
DH452115	11.5	12	71	118	DH452195	19.5	20	101	153
DH452116	11.6	12	71	118	DH452200	20.0	20	101	153
DH452117	11.7	12	71	118					

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




DH453 SERIES

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES EXTRA LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL ÜBERLANG
- Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série extra-longue EXTRA-LONGUE
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione) EXTRA LUNGA

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAlN coating for better surface finishes and longer tool life
- ▶ Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
- ▶ Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
- ▶ Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
- ▶ TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

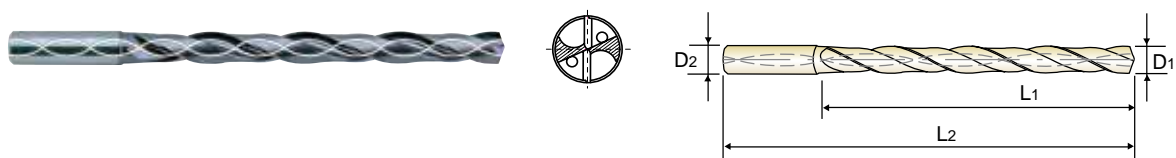

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar P.129-130 8 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
DH453030	3.0	6	34	72	DH453054	5.4	6	57	95
DH453031	3.1	6	34	72	DH453055	5.5	6	57	95
DH453032	3.2	6	34	72	DH453056	5.6	6	57	95
DH453033	3.3	6	34	72	DH453057	5.7	6	57	95
DH453034	3.4	6	34	72	DH453058	5.8	6	57	95
DH453035	3.5	6	34	72	DH453059	5.9	6	57	95
DH453036	3.6	6	34	72	DH453060	6.0	6	57	95
DH453037	3.7	6	34	72	DH453061	6.1	8	76	114
DH453038	3.8	6	43	81	DH453062	6.2	8	76	114
DH453039	3.9	6	43	81	DH453063	6.3	8	76	114
DH453040	4.0	6	43	81	DH453064	6.4	8	76	114
DH453041	4.1	6	43	81	DH453065	6.5	8	76	114
DH453042	4.2	6	43	81	DH453066	6.6	8	76	114
DH453043	4.3	6	43	81	DH453067	6.7	8	76	114
DH453044	4.4	6	43	81	DH453068	6.8	8	76	114
DH453045	4.5	6	43	81	DH453069	6.9	8	76	114
DH453046	4.6	6	43	81	DH453070	7.0	8	76	114
DH453047	4.7	6	43	81	DH453071	7.1	8	76	114
DH453048	4.8	6	57	95	DH453072	7.2	8	76	114
DH453049	4.9	6	57	95	DH453073	7.3	8	76	114
DH453050	5.0	6	57	95	DH453074	7.4	8	76	114
DH453051	5.1	6	57	95	DH453075	7.5	8	76	114
DH453052	5.2	6	57	95	DH453076	7.6	8	76	114
DH453053	5.3	6	57	95	DH453077	7.7	8	76	114

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA




DH453 SERIES

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES *EXTRA LONG*

● **VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL** *ÜBERLANG*
● **Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série extra-longue** *EXTRA-LONGUE*
● **PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione)** *EXTRA LUNGA*

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAlN coating for better surface finishes and longer tool life
- ▶ Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
- ▶ Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
- ▶ Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
- ▶ TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

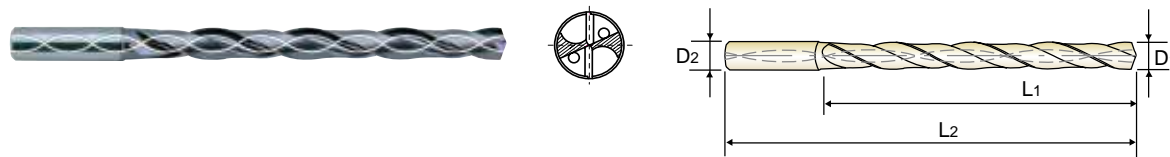

P.129-130

8 x D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
DH453078	7.8	8	76	114	DH453102	10.2	12	114	162
DH453079	7.9	8	76	114	DH453103	10.3	12	114	162
DH453080	8.0	8	76	114	DH453104	10.4	12	114	162
DH453081	8.1	10	95	142	DH453105	10.5	12	114	162
DH453082	8.2	10	95	142	DH453106	10.6	12	114	162
DH453083	8.3	10	95	142	DH453107	10.7	12	114	162
DH453084	8.4	10	95	142	DH453108	10.8	12	114	162
DH453085	8.5	10	95	142	DH453109	10.9	12	114	162
DH453086	8.6	10	95	142	DH453110	11.0	12	114	162
DH453087	8.7	10	95	142	DH453111	11.1	12	114	162
DH453088	8.8	10	95	142	DH453112	11.2	12	114	162
DH453089	8.9	10	95	142	DH453113	11.3	12	114	162
DH453090	9.0	10	95	142	DH453114	11.4	12	114	162
DH453091	9.1	10	95	142	DH453115	11.5	12	114	162
DH453092	9.2	10	95	142	DH453116	11.6	12	114	162
DH453093	9.3	10	95	142	DH453117	11.7	12	114	162
DH453094	9.4	10	95	142	DH453118	11.8	12	114	162
DH453095	9.5	10	95	142	DH453119	11.9	12	114	162
DH453096	9.6	10	95	142	DH453120	12.0	12	114	162
DH453097	9.7	10	95	142	DH453125	12.5	14	133	178
DH453098	9.8	10	95	142	DH453130	13.0	14	133	178
DH453099	9.9	10	95	142	DH453135	13.5	14	133	178
DH453100	10.0	10	95	142	DH453140	14.0	14	133	178
DH453101	10.1	12	114	162					

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	550	630	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



RECOMMENDED CUTTING CONDITIONS
EMPHOHLENE SCHNEIDPARAMETER

DH451, DH452, DH453 SERIES with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)		Vc (m/min)	Parameter	Drill Diameter (mm)														
					1.0	2.0			3.0	4.0	5.0	6.0											
P	1	Non-alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310											
	2			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20											
	3			RPM	22280	11140		RPM	10610	7960	6370	5310											
	4			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20											
	5																						
	6	Low alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310											
	7			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20											
	8			RPM	15920	7960		RPM	7430	5570	4460	3710											
	9			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20											
	10	High alloyed steel, and tool steel																					
	11																						
M	12	Stainless steel	40	RPM	12730	6370	50	RPM	5310	3980	3180	2650											
	13			FEED	0.02-0.04	0.02-0.04		FEED	0.03-0.05	0.05-0.09	0.07-0.11	0.09-0.13											
	14			RPM	7960	3980		RPM	4240	3180	2550	2120											
				FEED	14320	7160	60	FEED	6370	4770	3820	3180											
				FEED	0.02-0.04	0.02-0.04		FEED	0.04-0.06	0.06-0.10	0.08-0.12	0.10-0.14											
K	15	Grey cast iron																					
	16																						
	17												Nodular cast iron										
	18																						
	19	Malleable cast iron																					
	20																						
	N	21	Aluminum-wrought alloy	130	RPM	41380	20690	180	RPM	19100	14320	11460	9550										
		22			FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28										
23		Aluminum-cast, alloyed	110	RPM	41380	20690	180	RPM	19100	14320	11460	9550											
24				FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28											
25				RPM	35010	17510		RPM	16980	12730	10190	8490											
26				FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28											
27		Copper and Copper Alloys (Bronze / Brass)	110	RPM	35010	17510	160	RPM	16980	12730	10190	8490											
28				FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28											
29		Non Metallic Materials	90	RPM	28650	14320	130	RPM	13790	10350	8280	6900											
30				FEED	0.04-0.08	0.06-0.10		FEED	0.12-0.18	0.16-0.22	0.17-0.23	0.19-0.25											
S	31	Heat Resistant Super Alloys																					
	32																						
	33																						
	34																						
	35	Titanium Alloys																					
	36																						
	37												RPM	7960	3980	RPM	4240	3180	2550	2120			
		FEED	0.01-0.03	0.01-0.03	FEED	0.02-0.04	0.04-0.08	0.06-0.10	0.08-0.12														
H	38	Hardened steel																					
	39																						
	40												Chilled Cast Iron										
	41																						Hardened Cast Iron

▶ Recommend to reduce the feed rate as following

Feed 100% : DH451(3xD), DH452(5xD) **Feed 85% :** DH453(8xD)

▶ NEXT PAGE

DH451, DH452, DH453 SERIES with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					8.0	10.0	12.0	14.0	16.0	18.0	20.0	
P	1	Non-alloy steel	100	RPM	3980	3180	2650	2270	1990	1770	1590	
	2			FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	3			RPM	3980	3180	2650	2270	1990	1770	1590	
	4			FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	5											
	6	Low alloy steel	70	RPM	3980	3180	2650	2270	1990	1770	1590	
	7			FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	8			RPM	2790	2230	1860	1590	1390	1240	1110	
	9			FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	10											
	11	High alloyed steel, and tool steel										
M	12	Stainless steel	50	RPM	1990	1590	1330	1140	990	880	800	
	13			FEED	0.09-0.13	0.10-0.15	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	0.15-0.20	
	14			RPM	1590	1270	1060	910	800	710	640	
K	15	Grey cast iron	60	FEED	0.09-0.13	0.10-0.15	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	0.15-0.20	
	16			RPM	2390	1910	1590	1360	1190	1060	950	
	17	Nodular cast iron		FEED	0.10-0.14	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	0.15-0.20	0.16-0.21	
	18											
	19			Malleable cast iron								
	20											
N	21	Aluminum-wrought alloy	180	RPM	7160	5730	4770	4090	3580	3180	2860	
	22			FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
S	23	Aluminum-cast, alloyed	160	RPM	7160	5730	4770	4090	3580	3180	2860	
	24			FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
	25			RPM	6370	5090	4240	3640	3180	2830	2550	
	26			FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
H	27	Copper and Copper Alloys (Bronze / Brass)	130	RPM	5170	4140	3450	2960	2590	2300	2070	
	28			FEED	0.22-0.28	0.24-0.30	0.24-0.30	0.25-0.35	0.25-0.35	0.28-0.38	0.30-0.40	
	29											
	30											
S	31	Heat Resistant Super Alloys	40	RPM	1590	1270	1060	910	800	710	640	
	32			FEED	0.08-0.12	0.09-0.14	0.10-0.15	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	
	33											
	34											
	35			Titanium Alloys								
	36											
H	37	Hardened steel										
	38			Chilled Cast Iron								
	39					Hardened Cast Iron						
40												
41												

► Recommend to reduce the feed rate as following
Feed 100% : DH451(3xD), DH452(5xD) **Feed 85%** : DH453(8xD)



Leading Through Innovation



SOLID CARBIDE

DREAM DRILLS -ALU
DREAM DRILLS - ALU

- For Aluminum and Aluminum Alloys

- Für Aluminium und Aluminiumlegierungen

SELECTION GUIDE




SERIES	D5432	D5433	D5434
DRILLING DEPTH	3XD	5XD	8XD
LENGTH	SHORT	LONG	EXTRA LONG
SIZE MIN	D3.0	D3.0	D3.0
SIZE MAX	D20.0	D20.0	D14.0
PAGE	133	136	139

SURFACE TREATMENT

Bright

SOLID CARBIDE DREAM DRILLS ALU

For Aluminum and Aluminum Alloys

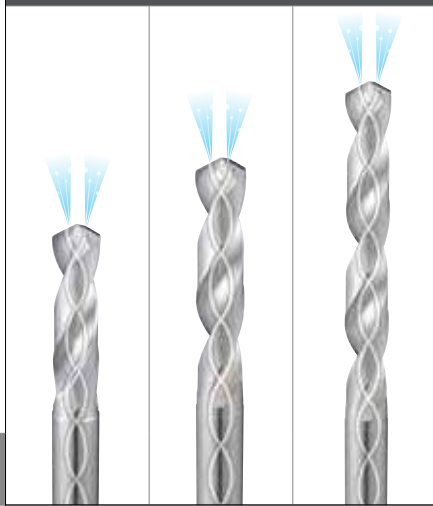

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.141

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125				
	2		About 0.45% C Annealed	190	13			
	3		About 0.45% C Quenched & Tempered	250	25			
	4		About 0.75% C Annealed	270	28			
	5	About 0.75% C Quenched & Tempered	300	32				
	6	Low alloy steel	Annealed	180	10			
	7		Quenched & Tempered	275	29			
	8		Quenched & Tempered	300	32			
	9	High alloyed steel, and tool steel	Quenched & Tempered	350	38			
	10		Annealed	200	15			
	11		Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15			
	13		Martensitic Quenched & Tempered	240	23			
	14	Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19	Malleable cast iron	Ferritic	130				
20	Pearlitic		230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	◎
	22		Curable Hardened	100		◎	◎	◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		◎	◎	◎
	24		≤ 12% Si, Curable Hardened	90		◎	◎	◎
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100				
	29		Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34	Titanium Alloys	Ni or Co Based Cured	350	38			
	35		Cast	320	34			
	36		Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Hardened Cast Iron	Cast	400	42			
	41		Hardened	550	55			



D5432 SERIES

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES


SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série courte
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (con fori di refrigerazione)

KURZ
COURTE
CORTA

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes

- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

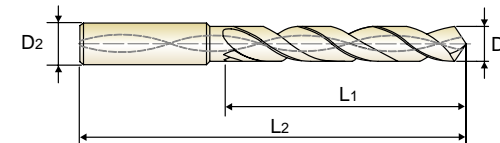

3 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2		D1	D2	L1	L2
D5432030	3.0	6	20	62	D5432052	5.2	6	28	66
D5432031	3.1	6	20	62	D5432053	5.3	6	28	66
D5432032	3.2	6	20	62	D5432054	5.4	6	28	66
D5432033	3.3	6	20	62	D5432055	5.5	6	28	66
D5432034	3.4	6	20	62	D5432056	5.6	6	28	66
D5432035	3.5	6	20	62	D5432057	5.7	6	28	66
D5432036	3.6	6	20	62	D5432058	5.8	6	28	66
D5432037	3.7	6	20	62	D5432059	5.9	6	28	66
D5432038	3.8	6	24	66	D5432060	6.0	6	28	66
D5432039	3.9	6	24	66	D5432061	6.1	8	34	79
D5432040	4.0	6	24	66	D5432062	6.2	8	34	79
D5432041	4.1	6	24	66	D5432063	6.3	8	34	79
D5432042	4.2	6	24	66	D5432064	6.4	8	34	79
D5432043	4.3	6	24	66	D5432065	6.5	8	34	79
D5432044	4.4	6	24	66	D5432066	6.6	8	34	79
D5432045	4.5	6	24	66	D5432067	6.7	8	34	79
D5432046	4.6	6	24	66	D5432068	6.8	8	34	79
D5432047	4.7	6	24	66	D5432069	6.9	8	34	79
D5432048	4.8	6	28	66	D5432070	7.0	8	34	79
D5432049	4.9	6	28	66	D5432071	7.1	8	41	79
D5432050	5.0	6	28	66	D5432072	7.2	8	41	79
D5432051	5.1	6	28	66	D5432073	7.3	8	41	79

- ▶ DLC coating is available on your request.
- ▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO	N							S					H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎																




D5432 SERIES

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES **SHORT**

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série courte
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (con fori di refrigerazione)

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes
- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

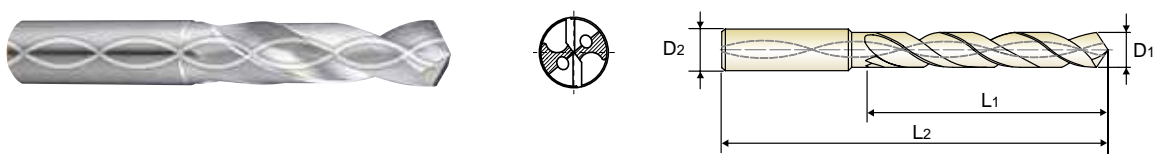

DIN 6537 CARBIDE 30° h6 m7 118° 20 bar P.141 3 × D

EDP No.	Drill Diameter		Shank Diameter		Flute Length		Overall Length	
	D1	D2	L1	L2	L1	L2	L1	L2
D5432074	7.4	8	41	79				
D5432075	7.5	8	41	79				
D5432076	7.6	8	41	79				
D5432077	7.7	8	41	79				
D5432078	7.8	8	41	79				
D5432079	7.9	8	41	79				
D5432080	8.0	8	41	79				
D5432081	8.1	10	47	89				
D5432082	8.2	10	47	89				
D5432083	8.3	10	47	89				
D5432084	8.4	10	47	89				
D5432085	8.5	10	47	89				
D5432086	8.6	10	47	89				
D5432087	8.7	10	47	89				
D5432088	8.8	10	47	89				
D5432089	8.9	10	47	89				
D5432090	9.0	10	47	89				
D5432091	9.1	10	47	89				
D5432092	9.2	10	47	89				
D5432093	9.3	10	47	89				
D5432094	9.4	10	47	89				
D5432095	9.5	10	47	89				

▶ DLC coating is available on your request. ▶ Other shank types are available on your request. ▶ NEXT PAGE

© : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	290	320	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO Material Description	N					S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc																						
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55	
Recommended	◎	◎	◎	◎																		




D5432 SERIES

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES **SHORT**

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série courte
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (con fori di refrigerazione)

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes
- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

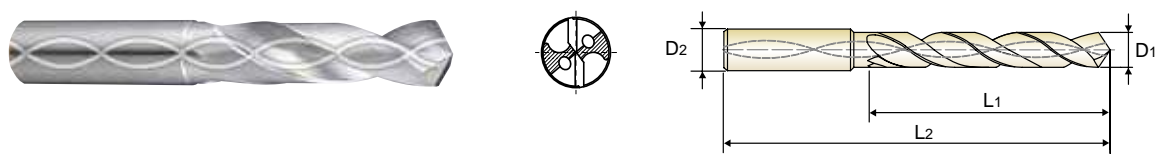

DIN 6537 CARBIDE 30° h6 m7 118° 20 bar P.141 3 × D

EDP No.	Drill Diameter		Shank Diameter		Flute Length		Overall Length	
	D1	D2	L1	L2	L1	L2	L1	L2
D5432118	11.8	12	55	102				
D5432119	11.9	12	55	102				
D5432120	12.0	12	55	102				
D5432125	12.5	14	60	107				
D5432130	13.0	14	60	107				
D5432135	13.5	14	60	107				
D5432140	14.0	14	60	107				
D5432145	14.5	16	65	115				
D5432150	15.0	16	65	115				
D5432155	15.5	16	65	115				

▶ DLC coating is available on your request. ▶ Other shank types are available on your request.

© : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	290	320	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					

ISO Material Description	N					S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc																						
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55	
Recommended	◎	◎	◎	◎																		



D5433 SERIES




D5433 SERIES

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL LANG
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série longue LONGUE
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (CON FORI DI REFRIGERAZIONE) LUNGA


- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes
- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

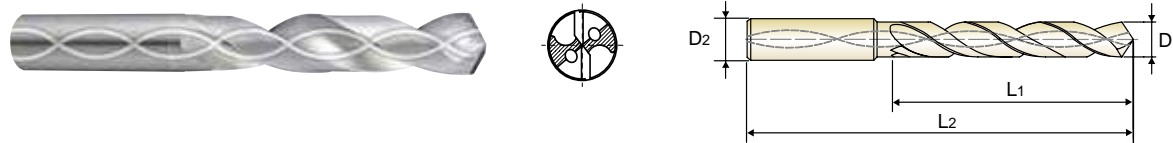

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL LANG
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série longue LONGUE
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (CON FORI DI REFRIGERAZIONE) LUNGA

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes
- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

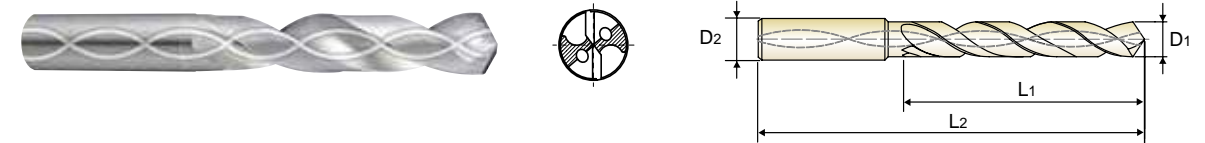

DIN 6537 CARBIDE 30° h6 m7 118° 20 bar P.141 5 x D

DIN 6537 CARBIDE 30° h6 m7 118° 20 bar P.141 5 x D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2		D1	D2	L1	L2
D5433030	3.0	6	28	66	D5433052	5.2	6	44	82
D5433031	3.1	6	28	66	D5433053	5.3	6	44	82
D5433032	3.2	6	28	66	D5433054	5.4	6	44	82
D5433033	3.3	6	28	66	D5433055	5.5	6	44	82
D5433034	3.4	6	28	66	D5433056	5.6	6	44	82
D5433035	3.5	6	28	66	D5433057	5.7	6	44	82
D5433036	3.6	6	28	66	D5433058	5.8	6	44	82
D5433037	3.7	6	28	66	D5433059	5.9	6	44	82
D5433038	3.8	6	36	74	D5433060	6.0	6	44	82
D5433039	3.9	6	36	74	D5433061	6.1	8	53	91
D5433040	4.0	6	36	74	D5433062	6.2	8	53	91
D5433041	4.1	6	36	74	D5433063	6.3	8	53	91
D5433042	4.2	6	36	74	D5433064	6.4	8	53	91
D5433043	4.3	6	36	74	D5433065	6.5	8	53	91
D5433044	4.4	6	36	74	D5433066	6.6	8	53	91
D5433045	4.5	6	36	74	D5433067	6.7	8	53	91
D5433046	4.6	6	36	74	D5433068	6.8	8	53	91
D5433047	4.7	6	36	74	D5433069	6.9	8	53	91
D5433048	4.8	6	44	82	D5433070	7.0	8	53	91
D5433049	4.9	6	44	82	D5433071	7.1	8	53	91
D5433050	5.0	6	44	82	D5433072	7.2	8	53	91
D5433051	5.1	6	44	82	D5433073	7.3	8	53	91

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2		D1	D2	L1	L2
D5433074	7.4	8	53	91	D5433096	9.6	10	61	103
D5433075	7.5	8	53	91	D5433097	9.7	10	61	103
D5433076	7.6	8	53	91	D5433098	9.8	10	61	103
D5433077	7.7	8	53	91	D5433099	9.9	10	61	103
D5433078	7.8	8	53	91	D5433100	10.0	10	61	103
D5433079	7.9	8	53	91	D5433101	10.1	12	71	118
D5433080	8.0	8	53	91	D5433102	10.2	12	71	118
D5433081	8.1	10	61	103	D5433103	10.3	12	71	118
D5433082	8.2	10	61	103	D5433104	10.4	12	71	118
D5433083	8.3	10	61	103	D5433105	10.5	12	71	118
D5433084	8.4	10	61	103	D5433106	10.6	12	71	118
D5433085	8.5	10	61	103	D5433107	10.7	12	71	118
D5433086	8.6	10	61	103	D5433108	10.8	12	71	118
D5433087	8.7	10	61	103	D5433109	10.9	12	71	118
D5433088	8.8	10	61	103	D5433110	11.0	12	71	118
D5433089	8.9	10	61	103	D5433111	11.1	12	71	118
D5433090	9.0	10	61	103	D5433112	11.2	12	71	118
D5433091	9.1	10	61	103	D5433113	11.3	12	71	118
D5433092	9.2	10	61	103	D5433114	11.4	12	71	118
D5433093	9.3	10	61	103	D5433115	11.5	12	71	118
D5433094	9.4	10	61	103	D5433116	11.6	12	71	118
D5433095	9.5	10	61	103	D5433117	11.7	12	71	118

▶ DLC coating is available on your request. ▶ NEXT PAGE
 ▶ Other shank types are available on your request.

▶ DLC coating is available on your request. ▶ NEXT PAGE
 ▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL LANG
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série longue LONGUE
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (CON FORI DI REFRIGERAZIONE) LUNGA

- Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- Wider and deeper flute gullets for maximum chip removal
- Special geometry and smooth coating reduces built up edge and improves finishes
- Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- Breitere und tiefere Spannuten für maximale Spanabfuhr
- Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

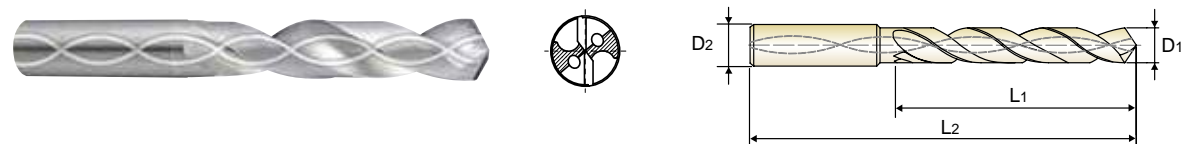

DIN 6537
CARBIDE
30°
h6
m7
118°
20 bar
P.141

5 × D

EDP No.	Drill Diameter		Shank Diameter		Flute Length		Overall Length	
	D1	D2	L1	L2	L1	L2	L1	L2
D5433118	11.8	12	71	118	10	11	12	133
D5433119	11.9	12	71	118	10	11	12	133
D5433120	12.0	12	71	118	10	11	12	133
D5433125	12.5	14	77	124	10	11	12	133
D5433130	13.0	14	77	124	10	11	12	133
D5433135	13.5	14	77	124	10	11	12	133
D5433140	14.0	14	77	124	10	11	12	133
D5433145	14.5	16	83	133	10	11	12	133
D5433150	15.0	16	83	133	10	11	12	133
D5433155	15.5	16	83	133	10	11	12	133
D5433160	16.0	16	83	133	10	11	12	133
D5433165	16.5	18	93	143	10	11	12	133
D5433170	17.0	18	93	143	10	11	12	133
D5433175	17.5	18	93	143	10	11	12	133
D5433180	18.0	18	93	143	10	11	12	133
D5433185	18.5	20	101	153	10	11	12	133
D5433190	19.0	20	101	153	10	11	12	133
D5433195	19.5	20	101	153	10	11	12	133
D5433200	20.0	20	101	153	10	11	12	133

- DLC coating is available on your request.
- Other shank types are available on your request.

◎: Excellent ○: Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S								H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES EXTRA LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL ÜBERLANG
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série extra-longue EXTRA-LONGUE
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (con fori di refrigerazione) EXTRA LUNGA

- Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- Wider and deeper flute gullets for maximum chip removal
- Special geometry and smooth coating reduces built up edge and improves finishes
- Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- Breitere und tiefere Spannuten für maximale Spanabfuhr
- Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

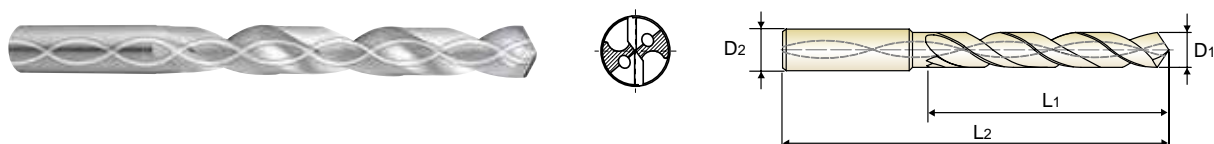

DIN 6537
CARBIDE
30°
h6
m7
118°
20 bar
P.141

8 × D

EDP No.	Drill Diameter		Shank Diameter		Flute Length		Overall Length	
	D1	D2	L1	L2	L1	L2	L1	L2
D5434030	3.0	6	34	72	10	11	12	133
D5434031	3.1	6	34	72	10	11	12	133
D5434032	3.2	6	34	72	10	11	12	133
D5434033	3.3	6	34	72	10	11	12	133
D5434034	3.4	6	34	72	10	11	12	133
D5434035	3.5	6	34	72	10	11	12	133
D5434036	3.6	6	34	72	10	11	12	133
D5434037	3.7	6	34	72	10	11	12	133
D5434038	3.8	6	43	81	10	11	12	133
D5434039	3.9	6	43	81	10	11	12	133
D5434040	4.0	6	43	81	10	11	12	133
D5434041	4.1	6	43	81	10	11	12	133
D5434042	4.2	6	43	81	10	11	12	133
D5434043	4.3	6	43	81	10	11	12	133
D5434044	4.4	6	43	81	10	11	12	133
D5434045	4.5	6	43	81	10	11	12	133
D5434046	4.6	6	43	81	10	11	12	133
D5434047	4.7	6	43	81	10	11	12	133
D5434048	4.8	6	57	95	10	11	12	133
D5434049	4.9	6	57	95	10	11	12	133
D5434050	5.0	6	57	95	10	11	12	133
D5434051	5.1	6	57	95	10	11	12	133
D5434052	5.2	6	57	95	10	11	12	133
D5434053	5.3	6	57	95	10	11	12	133
D5434054	5.4	6	57	95	10	11	12	133
D5434055	5.5	6	57	95	10	11	12	133
D5434056	5.6	6	57	95	10	11	12	133
D5434057	5.7	6	57	95	10	11	12	133
D5434058	5.8	6	57	95	10	11	12	133
D5434059	5.9	6	57	95	10	11	12	133
D5434060	6.0	6	57	95	10	11	12	133
D5434061	6.1	8	76	114	10	11	12	133
D5434062	6.2	8	76	114	10	11	12	133
D5434063	6.3	8	76	114	10	11	12	133
D5434064	6.4	8	76	114	10	11	12	133
D5434065	6.5	8	76	114	10	11	12	133
D5434066	6.6	8	76	114	10	11	12	133
D5434067	6.7	8	76	114	10	11	12	133
D5434068	6.8	8	76	114	10	11	12	133
D5434069	6.9	8	76	114	10	11	12	133
D5434070	7.0	8	76	114	10	11	12	133
D5434071	7.1	8	76	114	10	11	12	133
D5434072	7.2	8	76	114	10	11	12	133
D5434073	7.3	8	76	114	10	11	12	133
D5434074	7.4	8	76	114	10	11	12	133
D5434075	7.5	8	76	114	10	11	12	133
D5434076	7.6	8	76	114	10	11	12	133
D5434077	7.7	8	76	114	10	11	12	133

- DLC coating is available on your request.
- Other shank types are available on your request.

▶ NEXT PAGE

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S								H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




D5434 SERIES

CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES EXTRA LONG

VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL
Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série extra-longue
PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (con fori di refrigerazione)

- Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
Wider and deeper flute gullets for maximum chip removal
Special geometry and smooth coating reduces built up edge and improves finishes

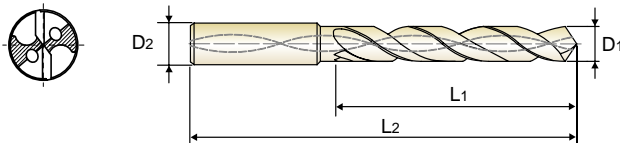

8 x D

Table with 4 columns: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their dimensions.

DLC coating is available on your request.
Other shank types are available on your request.

ISO material compatibility chart showing recommended RPM and FEED for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.



RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

D5432, D5433, D5434 SERIES with COOLANT HOLES

RPM = rev./min. FEED = mm/rev.

Large table with columns for ISO, VDI 3323, Material Description, Vc (m/min), Parameter, and Drill Diameter (mm) from 3.0 to 20.0. Contains recommended cutting conditions for various materials.



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING

SOLID CARBIDE

DREAM DRILLS -CFRP

DREAM DRILLS - CFK

- For Composite Materials including CFRP and GFRP
- Für Verbundwerkstoffe einschließlich CFK und GFK

SELECTION GUIDE



SERIES **DI473**

DRILLING DEPTH **5XD**

LENGTH **LONG**

SIZE MIN **D2.5**

SIZE MAX **D12.0**

PAGE **145**

SURFACE TREATMENT **Diamond Coating**

SOLID CARBIDE DREAM DRILLS CFRP

For Composite Materials including CFRP and GFRP




Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.146

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	
	2		About 0.45% C Annealed	190	13
	3		About 0.45% C Quenched & Tempered	250	25
	4		About 0.75% C Annealed	270	28
	5	About 0.75% C Quenched & Tempered	300	32	
	6	Low alloy steel	Annealed	180	10
	7		Quenched & Tempered	275	29
	8		Quenched & Tempered	300	32
	9		Quenched & Tempered	350	38
	10		High alloyed steel, and tool steel	Annealed	200
	11	Quenched & Tempered	325	35	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15
	13		Martensitic Quenched & Tempered	240	23
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10
	16		Pearlitic (Martensitic)	260	26
	17	Nodular cast iron	Ferritic	160	3
	18		Pearlitic	250	25
	19	Malleable cast iron	Ferritic	130	
	20		Pearlitic	230	21
N	21	Aluminum-wrought alloy	Not Curable	60	
	22		Curable Hardened	100	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	
	24		≤ 12% Si, Curable Hardened	90	
	25		> 12% Si, Not Curable	130	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27		CuZn, CuSnZn (Brass)	90	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100	
	29		Duroplastic, Fiber Reinforced Plastic		◎
	30		Rubber, Wood, etc.		
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34		Cured	350	38
	35	Cast	320	34	
	36	Titanium Alloys	Pure Titanium	400 Rm	
	37		Alpha + Beta Alloys Hardened	1050 Rm	
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41	Hardened Cast Iron	Hardened	550	55



Scan QR Code to See More Tools for COMPOSITE MATERIALS

Dream Drill CFRP is only available till stock runs out!

YIG DREAM DRILLS - CFRP

DI473 SERIES

CARBIDE, DREAM DRILLS - CFRP

- VOLLHARTMETALL DREAM SPIRALBOHRER - CFK
- Forets DREAM DRILLS carbure - CFRP
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - CFRP

LONG
LANG
LONGUE
LUNGA

- ▶ Special point type to improve hole quality for Composite Materials
- ▶ Minimized burr and delamination at entry / exit hole
- ▶ Outstanding performance
- ▶ Long tool life and increased product by Diamond Coating

- ▶ Spezielle Spitzengeometrie zur Verbesserung der Qualität der Bohrung in Compsite-Materialien
- ▶ Minimierung des Grates und der Delamination am Bohrungseintritt und -austritt
- ▶ Überzeugende Performance
- ▶ Lange Standzeiten und erhöhte Produktivität durch die Diamant-Beschichtung



5 x D

EDP No.	Unit : mm			
	Drill Diameter	Shank Diameter	Flute Length	Overall Length
Diamond-Coating	D1	D2	L1	L2
▲ DI473025	2.5	6	24	66
▲ DI473030	3.0	6	28	66
▲ DI473040	4.0	6	36	74
▲ DI473050	5.0	6	44	82
▲ DI473060	6.0	6	44	82
▲ DI473080	8.0	8	53	91
▲ DI473090	9.0	10	61	103
▲ DI473100	10.0	10	61	103
▲ DI473110	11.0	12	71	118
▲ DI473120	12.0	12	71	118

▲ : Only available till stock runs out



Scan QR Code to See More Tools for COMPOSITE MATERIALS
Dream Drill CFRP is only available till stock runs out!

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO	N							S							H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended																						

DI473 SERIES DREAM DRILLS - CFRP

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					3.0	4.0	5.0	6.0	8.0	10.0	20.0	
P	1	Non-alloy steel										
	2											
	3											
	4											
	5											
	6	Low alloy steel										
	7											
	8											
	9											
	10		High alloyed steel, and tool steel									
	11											
M	12	Stainless steel										
	13											
	14											
K	15	Grey cast iron										
	16											
	17	Nodular cast iron										
	18											
	19		Malleable cast iron									
	20											
N	21	Aluminum-wrought alloy										
	22											
	23	Aluminum-cast, alloyed										
	24											
	25											
	26											
	27	Copper and Copper Alloys (Bronze / Brass)										
	28											
	29		Non Metallic Materials	120	RPM FEED	12730 0.03-0.07	9550 0.03-0.07	7640 0.03-0.07	6370 0.03-0.07	4770 0.03-0.07	3820 0.03-0.07	3180 0.03-0.07
	30											
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35	Titanium Alloys										
	36											
	37											
H	38	Hardened steel										
	39											
	40	Chilled Cast Iron										
	41		Hardened Cast Iron									



SOLID CARBIDE

**DREAM DRILLS
-MQL TYPE
DREAM DRILLS - MQL TYPE**

- Minimum Quantity Lubrication Drilling Deep Holes (10xD ~ 30xD)
- Minimalmengenschmierung Tieflochbohren (10xD ~ 30xD)

SELECTION GUIDE



SERIES	DH510	DH515	DH520
DRILLING DEPTH	10XD	15XD	20XD
LENGTH	EXTRA LONG	EXTRA LONG	EXTRA LONG
SIZE MIN	D3.0	D3.0	D3.0
SIZE MAX	D14.0	D12.0	D12.0
PAGE	150	151	151

SURFACE TREATMENT TiAIN

SOLID CARBIDE DREAM DRILLS MQL TYPE

Minimum Quantity Lubrication Drilling Deep Holes (10xD ~ 30xD)

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good


Recommended cutting conditions : P.154

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	
	4		About 0.75% C Annealed	270	28				
	5		About 0.75% C Quenched & Tempered	300	32				
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	
	7		Quenched & Tempered	275	29	○	○	○	
	8		Quenched & Tempered	300	32	○	○	○	
	9		Quenched & Tempered	350	38				
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○
	11		Quenched & Tempered	325	35	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	◎	◎	◎	
	18		Pearlitic	250	25	○	○	○	
	19		Ferritic	130		◎	◎	◎	
20	Malleable cast iron	Pearlitic	230	21	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
30	Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15				
	32		Cured	280	30				
	33		Annealed	250	25				
	34		Ni or Co Based Cured	350	38				
	35		Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm					
	37		Alpha + Beta Alloys Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55				
	39		Hardened	630	60				
	40		Chilled Cast Iron	Cast	400	42			
	41		Hardened Cast Iron	Hardened	550	55			



DHM10	DHM15	DHM20	DHM25	DHM30
10XD	15XD	20XD	25XD	30XD
EXTRA LONG	EXTRA LONG	EXTRA LONG	EXTRA LONG	EXTRA LONG
D3.0	D3.0	D3.0	D3.0	D3.0
D14.0	D12.0	D12.0	D10.0	D8.0
152	152	152	153	153

TiAIN

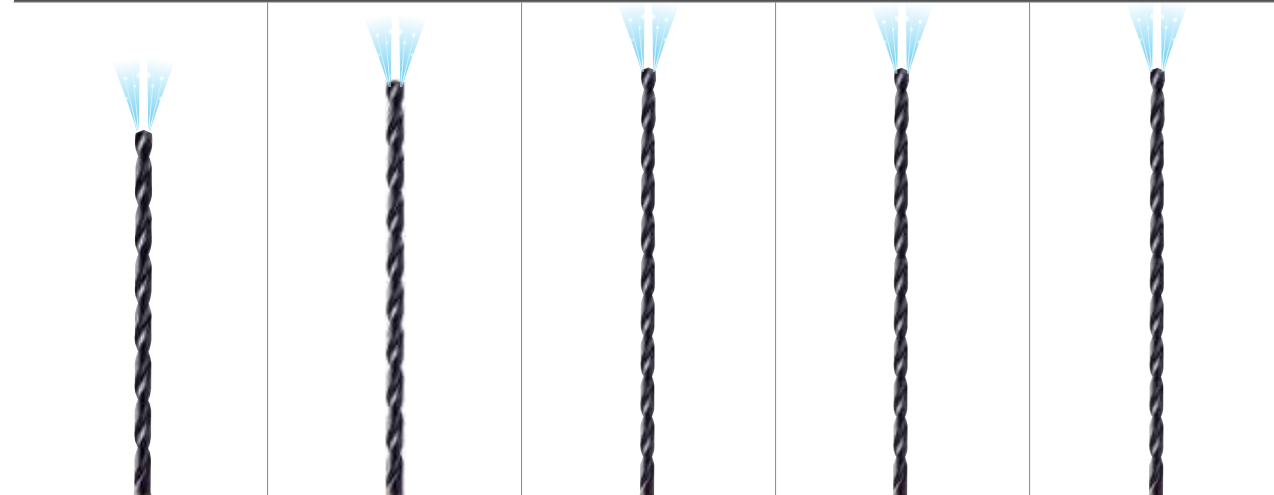

◎	◎	◎	◎	◎	1
◎	◎	◎	◎	◎	2
○	○	○	○	○	3
					4
					5
◎	◎	◎	◎	◎	6
○	○	○	○	○	7
○	○	○	○	○	8
					9
○	○	○	○	○	10
○	○	○	○	○	11
					12
					13
					14
◎	◎	◎	◎	◎	15
○	○	○	○	○	16
◎	◎	◎	◎	◎	17
○	○	○	○	○	18
◎	◎	◎	◎	◎	19
○	○	○	○	○	20
					21
					22
					23
					24
					25
					26
					27
					28
					29
					30
					31
					32
					33
					34
					35
					36
					37
					38
					39
					40
					41


Y/G DREAM DRILLS - MQL TYPE

DH510 SERIES

CARBIDE, DREAM DRILLS MQL TYPE with COOLANT HOLES EXTRA LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER MQL - TYPE mit KÜHLKANAL in GERADZÄHLIGER SCHAFTAUSFÜHRUNG **ÜBERLANG**
● Forets DREAM DRILLS carbure Type MQL avec arrosage central, série extra-longue **EXTRA-LONGUE**
● PUNTE ELICOIDALI IN MD, DREAM DRILLS MQL (con fori di refrigerazione) **EXTRA LUNGA**

- ▶ 4-Facet Point for good centering capability
 - ▶ Optimized special flutes are ideal for removing chips and for productive drilling
 - ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
 - ▶ MQL system compatible (Minimum Quantity Lubrication)
- ▶ 4-Facetten-Spitze für gute Zentrierfähigkeit
 - ▶ Optimierte Spezialnuten für die ideale Spanabfuhr und zum produktiven Bohren
 - ▶ Verbesserte Spanabfuhr durch hochglanzpolierte TiAIN-Nano-Vollbeschichtung
 - ▶ MMS geeignet

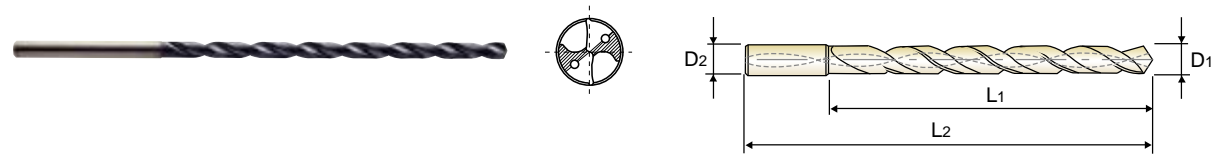

10 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH510030	3.0	3	39	90
DH510033	3.3	4	46	97
DH510035	3.5	4	46	97
DH510040	4.0	4	52	103
DH510042	4.2	5	59	112
DH510045	4.5	5	59	112
DH510050	5.0	5	65	118
DH510055	5.5	6	72	127
DH510060	6.0	6	78	133
DH510065	6.5	7	85	141
DH510068	6.8	7	91	147
DH510070	7.0	7	91	147
DH510075	7.5	8	98	155

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH510080	8.0	8	104	161
DH510085	8.5	9	111	169
DH510090	9.0	9	117	175
DH510095	9.5	10	124	182
DH510100	10.0	10	130	188
DH510105	10.5	11	137	201
DH510110	11.0	11	143	207
DH510115	11.5	12	150	215
DH510120	12.0	12	156	221
DH510125	12.5	13	163	229
DH510130	13.0	13	169	235
DH510135	13.5	14	176	243
DH510140	14.0	14	182	249

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	30	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO	N							S						H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	55	60	42	55
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	55	60	42	55
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	550	630	400	550
Recommended																									

Y/G DREAM DRILLS - MQL TYPE


DH515 SERIES

DH520 SERIES

CARBIDE, DREAM DRILLS MQL TYPE with COOLANT HOLES EXTRA LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER MQL - TYPE mit KÜHLKANAL in GERADZÄHLIGER SCHAFTAUSFÜHRUNG **ÜBERLANG**
● Forets DREAM DRILLS carbure Type MQL avec arrosage central, série extra-longue **EXTRA-LONGUE**
● PUNTE ELICOIDALI IN MD, DREAM DRILLS MQL (con fori di refrigerazione) **EXTRA LUNGA**

- ▶ 4-Facet Point for good centering capability
 - ▶ Optimized special flutes are ideal for removing chips and for productive drilling
 - ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
 - ▶ MQL system compatible (Minimum Quantity Lubrication)
- ▶ 4-Facetten-Spitze für gute Zentrierfähigkeit
 - ▶ Optimierte Spezialnuten für die ideale Spanabfuhr und zum produktiven Bohren
 - ▶ Verbesserte Spanabfuhr durch hochglanzpolierte TiAIN-Nano-Vollbeschichtung
 - ▶ MMS geeignet

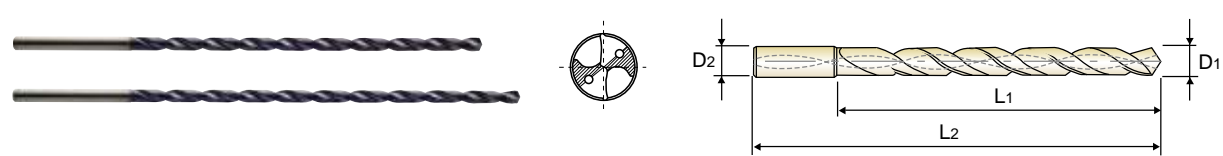

15 × D (DH515) 20 × D (DH520)

DH515

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH515030	3.0	3	54	105
DH515035	3.5	4	63	114
DH515040	4.0	4	72	123
DH515045	4.5	5	81	134
DH515050	5.0	5	90	143
DH515055	5.5	6	99	154
DH515060	6.0	6	108	163
DH515070	7.0	7	126	182
DH515080	8.0	8	144	201
DH515090	9.0	9	162	220
DH515100	10.0	10	180	238
DH515110	11.0	11	198	262
DH515120	12.0	12	216	281

DH520

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH520030	3.0	3	69	120
DH520035	3.5	4	81	132
DH520040	4.0	4	92	143
DH520045	4.5	5	104	157
DH520050	5.0	5	115	168
DH520055	5.5	6	127	182
DH520060	6.0	6	138	193
DH520070	7.0	7	161	217
DH520080	8.0	8	184	241
DH520090	9.0	9	207	265
DH520100	10.0	10	230	288
DH520120	12.0	12	276	341

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	30	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO	N							S						H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	55	60	42	55
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	55	60	42	55
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	550	630	400	550
Recommended																									



CARBIDE, DREAM DRILL MQL TYPE END MILL SHANK with COOLANT HOLE EXTRA LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER MQL - TYPE MIT KÜHLKANAL
Forets DREAM DRILLS carbure Type MQL avec arrosage central, série extra-longue
PUNTE MD, DREAM DRILLS MQL GAMBO RINFORZATO (con fori di ferigrazione)

- 4-Facet Point for good centering capability
Optimized special flutes are ideal for removing chips and for productive drilling
Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
MQL system compatible (Minimum Quantity Lubrication)

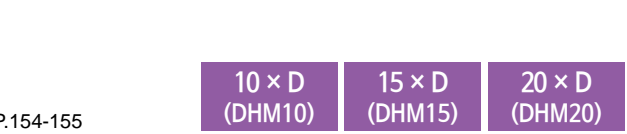
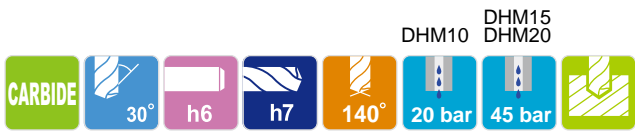
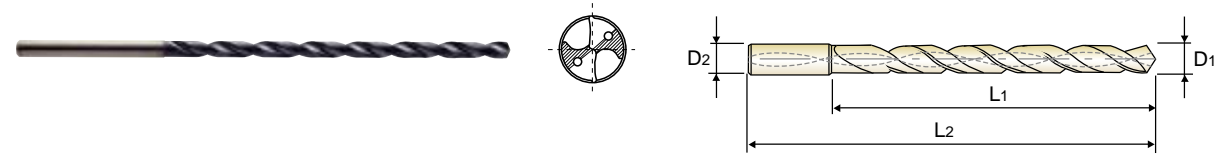


Table for DHM10 series: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length

Table for DHM15 series: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length

Table for DHM20 series: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length

ISO chart for DHM10-20 series showing material compatibility (P, M, K, N, S, H)

CARBIDE, DREAM DRILL MQL TYPE END MILL SHANK with COOLANT HOLE EXTRA LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER MQL - TYPE MIT KÜHLKANAL
Forets DREAM DRILLS carbure Type MQL avec arrosage central, attache ment type fraise, série extra-longue
PUNTE MD, DREAM DRILLS MQL GAMBO RINFORZATO (con fori di ferigrazione)

- 4-Facet Point for good centering capability
Optimized special flutes are ideal for removing chips and for productive drilling
Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
MQL system compatible (Minimum Quantity Lubrication)

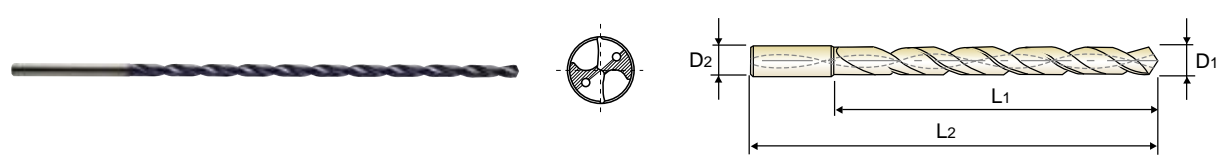


Table for DHM25 series: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length


Table for DHM30 series: EDP No., Drill Diameter, Shank Diameter, Flute Length, Overall Length

ISO chart for DHM25-30 series showing material compatibility (P, M, K, N, S, H)

DH510, DH515, DH520, DHM10, DHM15, DHM20, DHM25, DHM30 SERIES with COOLANT HOLES


RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)		Parameter	Drill Diameter (mm)			
			10xD ~ 20xD	25xD ~ 30xD		3.0	4.0	5.0	6.0
P	1	Non-alloy steel	120	100	RPM(10xD-20xD)	12730	9550	7640	6370
					RPM(25xD-30xD)	10610	7960	6370	5310
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20
	2		100	80	RPM(10xD-20xD)	10610	7960	6370	5310
					RPM(25xD-30xD)	8490	6370	5090	4240
					FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20
	3		80	65	RPM(10xD-20xD)	8490	6370	5090	4240
					RPM(25xD-30xD)	6900	5170	4140	3450
					FEED	0.06-0.10	0.08-0.12	0.10-0.16	0.12-0.18
	4								
5									
6	100	100	RPM(10xD-20xD)	10610	7960	6370	5310		
			RPM(25xD-30xD)	10610	7960	6370	5310		
			FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20		
7	70	60	RPM(10xD-20xD)	7430	5570	4460	3710		
			RPM(25xD-30xD)	6370	4770	3820	3180		
			FEED	0.06-0.10	0.08-0.12	0.10-0.16	0.12-0.18		
8	55	50	RPM(10xD-20xD)	5840	4380	3500	2920		
			RPM(25xD-30xD)	5310	3980	3180	2650		
			FEED	0.06-0.10	0.08-0.12	0.10-0.16	0.12-0.18		
9									
10	60	50	RPM(10xD-20xD)	6370	4770	3820	3180		
			RPM(25xD-30xD)	5310	3980	3180	2650		
			FEED	0.05-0.09	0.07-0.11	0.08-0.14	0.10-0.16		
11	50	45	RPM(10xD-20xD)	5310	3980	3180	2650		
			RPM(25xD-30xD)	4770	3580	2860	2390		
			FEED	0.04-0.08	0.06-0.10	0.07-0.13	0.08-0.14		
M	12								
13									
14									
K	15	90	75	RPM(10xD-20xD)	9550	7160	5730	4770	
				RPM(25xD-30xD)	7960	5970	4770	3980	
				FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25	
16	70	60	RPM(10xD-20xD)	7430	5570	4460	3710		
			RPM(25xD-30xD)	6370	4770	3820	3180		
			FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25		
17	100	80	RPM(10xD-20xD)	10610	7960	6370	5310		
			RPM(25xD-30xD)	8490	6370	5090	4240		
			FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25		
18	70	60	RPM(10xD-20xD)	7430	5570	4460	3710		
			RPM(25xD-30xD)	6370	4770	3820	3180		
			FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20		
19	80	65	RPM(10xD-20xD)	8490	6370	5090	4240		
			RPM(25xD-30xD)	6900	5170	4140	3450		
			FEED	0.10-0.14	0.12-0.16	0.17-0.23	0.19-0.25		
20	70	55	RPM(10xD-20xD)	7430	5570	4460	3710		
			RPM(25xD-30xD)	5840	4380	3500	2920		
			FEED	0.08-0.12	0.10-0.14	0.12-0.18	0.14-0.20		

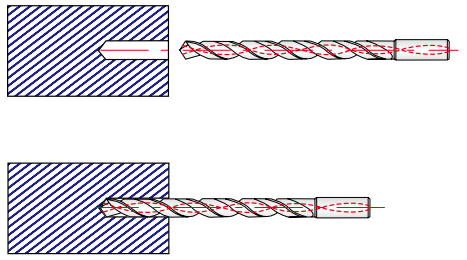

1. Guide Drilling should be done as Diameter+0.1mm between 3xD and 5xD depth.
2. For Main Drilling, proceed with low RPM at Guide Drilling segment. (RPM 300, FEED 400mm/min)
3. Just before the end of Guide Drilling segment, reduce feed to zero and increase the RPM according to Recommended Cutting Condition chart (See above).

VDI 3323	Parameter	Drill Diameter (mm)			
		8.0	10.0	12.0	14.0
1	RPM(10xD-20xD)	4770	3820	3180	2730
	RPM(25xD-30xD)	3980	3180	2650	2270
	FEED	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
2	RPM(10xD-20xD)	3980	3180	2650	2270
	RPM(25xD-30xD)	3180	2550	2120	1820
	FEED	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
3	RPM(10xD-20xD)	3180	2550	2120	1820
	RPM(25xD-30xD)	2590	2070	1720	1480
	FEED	0.14-0.20	0.16-0.22	0.18-0.24	0.20-0.26
4					
5					
6	RPM(10xD-20xD)	3980	3180	2650	2270
	RPM(25xD-30xD)	3980	3180	2650	2270
	FEED	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
7	RPM(10xD-20xD)	2790	2230	1860	1590
	RPM(25xD-30xD)	2390	1910	1590	1360
	FEED	0.14-0.20	0.16-0.22	0.18-0.24	0.20-0.26
8	RPM(10xD-20xD)	2190	1750	1460	1250
	RPM(25xD-30xD)	1990	1590	1330	1140
	FEED	0.14-0.20	0.16-0.22	0.18-0.24	0.20-0.26
9					
10	RPM(10xD-20xD)	2390	1910	1590	1360
	RPM(25xD-30xD)	1990	1590	1330	1140
	FEED	0.12-0.18	0.14-0.20	0.16-0.22	0.18-0.24
11	RPM(10xD-20xD)	1990	1590	1330	1140
	RPM(25xD-30xD)	1790	1430	1190	1020
	FEED	0.10-0.16	0.12-0.18	0.13-0.19	0.15-0.21
12					
13					
14					
15	RPM(10xD-20xD)	3580	2860	2390	2050
	RPM(25xD-30xD)	2980	2390	1990	1710
	FEED	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
16	RPM(10xD-20xD)	2790	2230	1860	1590
	RPM(25xD-30xD)	2390	1910	1590	1360
	FEED	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
17	RPM(10xD-20xD)	3980	3180	2650	2270
	RPM(25xD-30xD)	3180	2550	2120	1820
	FEED	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
18	RPM(10xD-20xD)	2790	2230	1860	1590
	RPM(25xD-30xD)	2390	1910	1590	1360
	FEED	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31
19	RPM(10xD-20xD)	3180	2550	2120	1820
	RPM(25xD-30xD)	2590	2070	1720	1480
	FEED	0.22-0.28	0.24-0.30	0.28-0.34	0.30-0.36
20	RPM(10xD-20xD)	2790	2230	1860	1590
	RPM(25xD-30xD)	2190	1750	1460	1250
	FEED	0.18-0.24	0.20-0.26	0.22-0.26	0.25-0.31

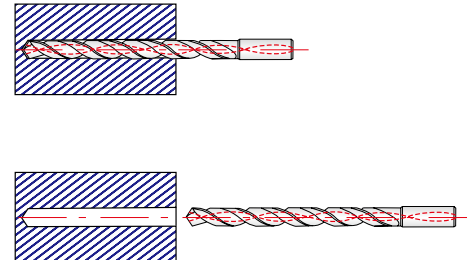

4. After then, proceed main drilling by increasing feed without step drilling.
5. When coming out from Guide Drilling start point after drilling, RPM should be reduced as 300 and feed should be 1000 mm/min.
6. When coming out from Guide Drilling segment to the outside, the feed should be decreased as 50%.




Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING

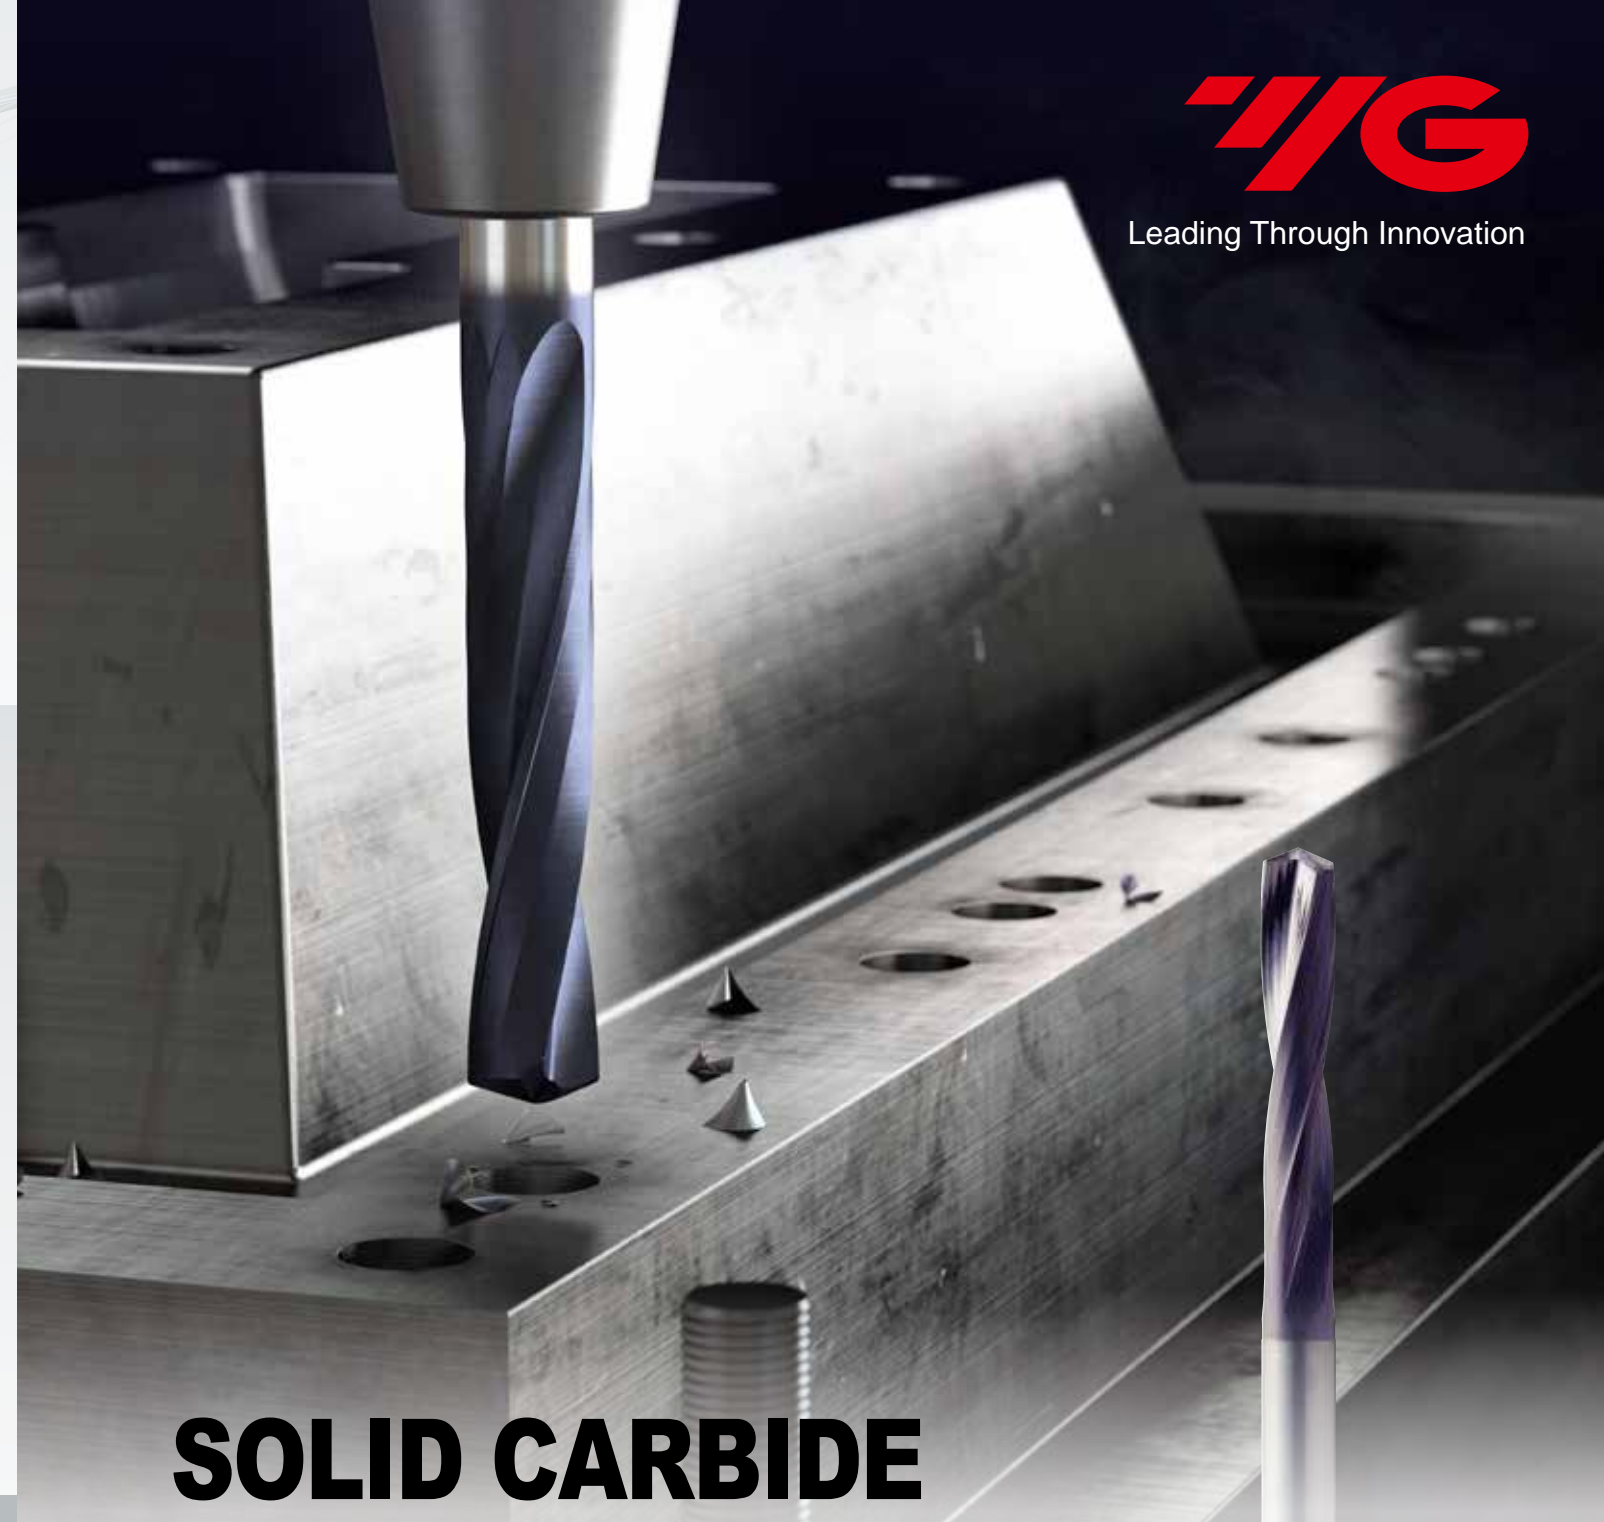

SOLID CARBIDE

DREAM DRILLS

- for HIGH HARDENED STEELS

DREAM DRILLS - FÜR HOCHGEHÄRTETE STÄHLE

- For High Hardened Steels (HRc50 to HRc70)

- Für hochgehärtete Stähle (HRc50 bis HRc70)

SELECTION GUIDE



SERIES	DH500
DRILLING DEPTH	3XD
LENGTH	SHORT
SIZE MIN	D2.6
SIZE MAX	D14.0
PAGE	159
SURFACE TREATMENT	TiAIN

SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS

For High Hardened Steels (HRc50 to HRc70)



Please visit global.yg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.160

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	
P	1	Non-alloy steel	About 0.15% C Annealed	125		
	2		About 0.45% C Annealed	190	13	
	3		About 0.45% C Quenched & Tempered	250	25	
	4		About 0.75% C Annealed	270	28	
	5		About 0.75% C Quenched & Tempered	300	32	
	6	Low alloy steel	Annealed	180	10	
	7		Quenched & Tempered	275	29	
	8		Quenched & Tempered	300	32	
	9		Quenched & Tempered	350	38	
	10		High alloyed steel, and tool steel	Annealed	200	15
	11		Quenched & Tempered	325	35	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	
	13		Martensitic Quenched & Tempered	240	23	
	14		Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	
	16		Pearlitic (Martensitic)	260	26	
	17	Nodular cast iron	Ferritic	160	3	
	18		Pearlitic	250	25	
	19	Malleable cast iron	Ferritic	130		
	20		Pearlitic	230	21	
N	21	Aluminum-wrought alloy	Not Curable	60		
	22		Curable Hardened	100		
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		
	24		≤ 12% Si, Curable Hardened	90		
	25		> 12% Si, Not Curable	130		
	26		Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27	Non Metallic Materials	CuZn, CuSnZn (Brass)	90		
	28		CuSn, lead-free copper and electrolytic copper	100		
	29		Duroplastic, Fiber Reinforced Plastic			
	30	Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	
	32		Cured	280	30	
	33		Annealed	250	25	
	34		Ni or Co Based Cured	350	38	
	35		Cast	320	34	
	36		Titanium Alloys	Pure Titanium	400 Rm	
	37			Alpha + Beta Alloys Hardened	1050 Rm	
H	38	Hardened steel	Hardened	550	55	
	39.1		Hardened	630	60	
	39.3		Hardened	70		
	40		Chilled Cast Iron	Cast	400	42
41	Hardened Cast Iron	Hardened	550	55		

DREAM DRILLS for HIGH HARDENED STEELS

DH500 SERIES

CARBIDE, DREAM DRILLS for HIGH HARDENED STEELS (HRc50~HRc70)



SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER FÜR HOCHGEHARTETE STAHL
- Forets DREAM DRILLS carbure pour Aciers Trempés (50 HRc ~ 70 HRc)
- PUNTE ELICOIDALI IN MD, DREAM DRILL - ACCIAI HRC 50 - 70

KURZ
COURTE
CORTA

- ▶ Drilling for High Hardened Steels; Quenched Steels, Tempered Steels (under HRc 70)
- ▶ Special geometry design for Hardened Steels
- ▶ Minimum of cutting load through special thinning
- ▶ Performing good chip removal and powerful drilling

- ▶ Bohren von hoch gehärteten Stählen, Vergütungsstähle, angelassenen Stählen bis HRc 70
- ▶ Spezielle Bohrergeometrie für gehärtete Stähle
- ▶ Minimaler Schnedendruck durch spezielle Ausspitzung
- ▶ Gute Spanabfuhr und Hochleistungsbohren

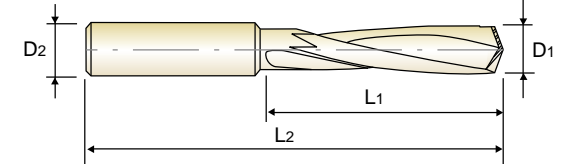

3 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH500026	2.6	3	14	44
DH500030	3.0	3	16	46
DH500033	3.3	4	18	48
DH500034	3.4	4	20	50
DH500035	3.5	4	20	50
DH500040	4.0	4	22	52
DH500042	4.2	6	25	65
DH500043	4.3	6	28	68
DH500044	4.4	6	28	68
DH500045	4.5	6	28	68
DH500050	5.0	6	32	72
DH500051	5.1	6	32	72
DH500052	5.2	6	32	72
DH500055	5.5	6	35	75
DH500060	6.0	6	35	75
DH500065	6.5	8	40	80
DH500068	6.8	8	45	85
DH500069	6.9	8	45	85

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH500070	7.0	8	45	85
DH500075	7.5	8	45	85
DH500080	8.0	8	50	98
DH500085	8.5	10	50	98
DH500086	8.6	10	57	105
DH500088	8.8	10	57	105
DH500090	9.0	10	57	105
DH500095	9.5	10	57	105
DH500100	10.0	10	63	111
DH500102	10.2	12	63	111
DH500103	10.3	12	63	111
DH500105	10.5	12	63	111
DH500108	10.8	12	71	119
DH500110	11.0	12	71	119
DH500115	11.5	12	71	119
DH500120	12.0	12	71	119
DH500140	14.0	14	77	125

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	230		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended																						
ISO	N							S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	630
Recommended																						

◎ : Excellent ○ : Good



DREAM DRILLS
for HIGH HARDENED STEELS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DH500 SERIES

DREAM DRILLS for HIGH HARDENED STEELS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0
P	1	Non-alloy steel										
	2											
	3											
	4											
	5											
	6	Low alloy steel										
	7											
	8											
	9											
	10											
	11	High alloyed steel, and tool steel										
M	12	Stainless steel										
	13											
	14											
K	15	Grey cast iron										
	16	Nodular cast iron										
	17											
	18											
	19	Malleable cast iron										
	20											
N	21	Aluminum-wrought alloy										
	22											
	23	Aluminum-cast, alloyed										
	24											
	25											
	26											
	27	Copper and Copper Alloys (Bronze / Brass)										
	28											
	29											
	30	Non Metallic Materials										
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35											
	36	Titanium Alloys										
	37											
H	38	Hardened steel	20	RPM	2120	1590	1270	1060	800	640	530	450
			FEED	0.01-0.03	0.01-0.04	0.01-0.04	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.06	0.01-0.06	
	39.1		RPM	1590	1190	950	800	600	480	400	340	
	FEED	0.01-0.03	0.01-0.04	0.01-0.04	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.06	0.01-0.06		
39.3	RPM	1270	950	760	640	480	380	320	270			
	FEED	0.01-0.03	0.01-0.04	0.01-0.04	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.05	0.01-0.06	0.01-0.06		
40	Chilled Cast Iron											
41	Hardened Cast Iron											



Leading Through Innovation



SOLID CARBIDE

GENERAL CARBIDE DRILLS
UNIVERSELLE VHM - BOHRER

- For General Purpose, DIN338 & DIN6539
- Für allgemeine Anwendungen, DIN 338 & DIN 6539

SELECTION GUIDE



SERIES	D5405	D5407
STANDARD	DIN6539	DIN338
LENGTH	STUB	JOBBER
SIZE MIN	D1.0	D1.0
SIZE MAX	D13.0	D13.0
PAGE	163	165

SURFACE TREATMENT

Bright

SOLID CARBIDE GENERAL CARBIDE DRILLS

For General Purpose, DIN338 & DIN6539



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.167

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	
	2		About 0.45% C Annealed	190	13	○	○	
	3		About 0.45% C Quenched & Tempered	250	25			
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	○	○	
	7		Quenched & Tempered	275	29			
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11	Quenched & Tempered	325	35				
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	
	13		Martensitic Quenched & Tempered	240	23			
	14	Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19		Ferritic	130				
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	
	22		Curable Hardened	100		◎	◎	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		◎	◎	
	24		≤ 12% Si, Curable Hardened	90		◎	◎	
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15		
	32			Cured	280	30		
	33		Annealed	250	25			
	34		Cured	350	38			
	35	Titanium Alloys	Alpha + Beta Alloys	Cast	320	34		
	36			400 Rm		○	○	
	37			1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39			630	60			
	40	Hardened Cast Iron	Cast	400	42			
	41			550	55			



D5405 SERIES

CARBIDE DRILLS



- VOLLHARTMETALL-SPIRALBOHRER
- Forets carbure, série extra-courte
- PUNTE IN METALLO DURO

STUB

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

Application : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

Verwendung : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.

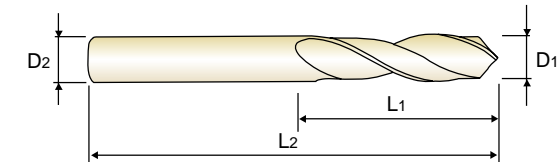

D1=D2

Unit : mm

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
D5405010	1.0	6	26	D5405034	3.4	20	52		
D5405011	1.1	7	28	D5405035	3.5	20	52		
D5405012	1.2	8	30	D5405036	3.6	20	52		
D5405013	1.3	8	30	D5405037	3.7	20	52		
D5405014	1.4	9	32	D5405038	3.8	22	55		
D5405015	1.5	9	32	D5405039	3.9	22	55		
D5405016	1.6	10	34	D5405040	4.0	22	55		
D5405017	1.7	10	34	D5405041	4.1	22	55		
D5405018	1.8	11	36	D5405042	4.2	22	55		
D5405019	1.9	11	36	D5405043	4.3	24	58		
D5405020	2.0	12	38	D5405044	4.4	24	58		
D5405021	2.1	12	38	D5405045	4.5	24	58		
D5405022	2.2	13	40	D5405046	4.6	24	58		
D5405023	2.3	13	40	D5405047	4.7	24	58		
D5405024	2.4	14	43	D5405048	4.8	26	62		
D5405025	2.5	14	43	D5405049	4.9	26	62		
D5405026	2.6	14	43	D5405050	5.0	26	62		
D5405027	2.7	16	46	D5405051	5.1	26	62		
D5405028	2.8	16	46	D5405052	5.2	26	62		
D5405029	2.9	16	46	D5405053	5.3	26	62		
D5405030	3.0	16	46	D5405054	5.4	28	66		
D5405031	3.1	18	49	D5405055	5.5	28	66		
D5405032	3.2	18	49	D5405056	5.6	28	66		
D5405033	3.3	18	49	D5405057	5.7	28	66		

TIN(D6405), TICN(DG405) and TiAIN(DH405) are available on your request.

NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323																				
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	○				○					○				○					

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc	15	30	25	38	34						15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	200	280	250	350	320						200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎												○					

GENERAL CARBIDE DRILLS

D5405 SERIES

CARBIDE DRILLS



- VOLLHARTMETALL-SPIRALBOHRER
- Forets carbure, série extra-courte
- PUNTE IN METALLO DURO

STUB

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

►Verwendung : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.

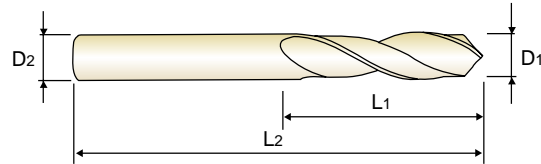

D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5405058	5.8	28	66
D5405059	5.9	28	66
D5405060	6.0	28	66
D5405061	6.1	31	70
D5405062	6.2	31	70
D5405063	6.3	31	70
D5405064	6.4	31	70
D5405065	6.5	31	70
D5405066	6.6	31	70
D5405067	6.7	31	70
D5405068	6.8	34	74
D5405069	6.9	34	74
D5405070	7.0	34	74
D5405071	7.1	34	74
D5405072	7.2	34	74
D5405073	7.3	34	74
D5405074	7.4	34	74
D5405075	7.5	34	74
D5405076	7.6	37	79
D5405077	7.7	37	79
D5405078	7.8	37	79
D5405079	7.9	37	79
D5405080	8.0	37	79
D5405081	8.1	37	79
D5405082	8.2	37	79

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5405083	8.3	37	79
D5405084	8.4	37	79
D5405085	8.5	37	79
D5405086	8.6	40	84
D5405087	8.7	40	84
D5405088	8.8	40	84
D5405089	8.9	40	84
D5405090	9.0	40	84
D5405091	9.1	40	84
D5405092	9.2	40	84
D5405093	9.3	40	84
D5405094	9.4	40	84
D5405095	9.5	40	84
D5405096	9.6	43	89
D5405097	9.7	43	89
D5405098	9.8	43	89
D5405099	9.9	43	89
D5405100	10.0	43	89
D5405102	10.2	43	89
D5405105	10.5	43	89
D5405110	11.0	47	95
D5405115	11.5	47	95
D5405120	12.0	51	102
D5405130	13.0	51	102

Unit : mm

► TiN(D6405), TiCN(DG405) and TiAlN(DH405) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	○				○				○					○					

ISO	N										S						H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎												○					

GENERAL CARBIDE DRILLS

D5407 SERIES

CARBIDE DRILLS



- VOLLHARTMETALL-SPIRALBOHRER
- Forets carbure, série courte
- PUNTE IN METALLO DURO

JOBBER

KURZ
COURTE
CORTA

►Application : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

►Verwendung : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.

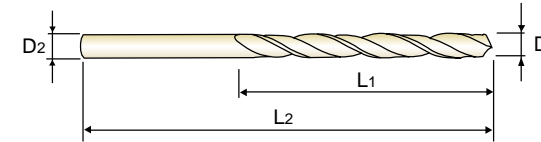

D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5407010	1.0	12	34
D5407011	1.1	14	36
D5407012	1.2	16	38
D5407013	1.3	16	38
D5407014	1.4	18	40
D5407015	1.5	18	40
D5407016	1.6	20	43
D5407017	1.7	20	43
D5407018	1.8	22	46
D5407019	1.9	22	46
D5407020	2.0	24	49
D5407021	2.1	24	49
D5407022	2.2	27	53
D5407023	2.3	27	53
D5407024	2.4	30	57
D5407025	2.5	30	57
D5407026	2.6	30	57
D5407027	2.7	33	61
D5407028	2.8	33	61
D5407029	2.9	33	61
D5407030	3.0	33	61
D5407031	3.1	36	65

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5407032	3.2	36	65
D5407033	3.3	36	65
D5407034	3.4	39	70
D5407035	3.5	39	70
D5407036	3.6	39	70
D5407037	3.7	39	70
D5407038	3.8	43	75
D5407039	3.9	43	75
D5407040	4.0	43	75
D5407041	4.1	43	75
D5407042	4.2	43	75
D5407043	4.3	47	80
D5407044	4.4	47	80
D5407045	4.5	47	80
D5407046	4.6	47	80
D5407047	4.7	47	80
D5407048	4.8	52	86
D5407049	4.9	52	86
D5407050	5.0	52	86
D5407051	5.1	52	86
D5407052	5.2	52	86
D5407053	5.3	52	86

Unit : mm

► TiN(D6407), TiCN(DG407) and TiAlN(DH407) are available on your request.

► NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	○				○				○					○					

ISO	N										S						H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎												○					


CARBIDE DRILLS

VOLLHARTMETALL-SPIRALBOHRER
Forets carbure, série courte
MPUNTE IN METALLO DURO

JOBBER
KURZ
COURTE
CORTA

Application : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

Verwendung : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.

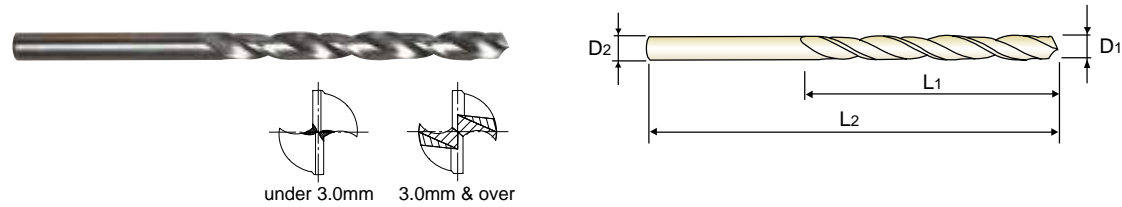

D1=D2

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D5407054	5.4	57	93	D5407070	7.0	69	109
D5407055	5.5	57	93	D5407075	7.5	69	109
D5407056	5.6	57	93	D5407080	8.0	75	117
D5407057	5.7	57	93	D5407085	8.5	75	117
D5407058	5.8	57	93	D5407090	9.0	81	125
D5407059	5.9	57	93	D5407095	9.5	81	125
D5407060	6.0	57	93	D5407100	10.0	87	133
D5407061	6.1	63	101	D5407102	10.2	87	133
D5407062	6.2	63	101	D5407105	10.5	87	133
D5407063	6.3	63	101	D5407110	11.0	94	142
D5407064	6.4	63	101	D5407115	11.5	94	142
D5407065	6.5	63	101	D5407120	12.0	101	151
D5407068	6.8	69	109	D5407130	13.0	101	151

TiN(D6407), TiCN(DG407) and TiAlN(DH407) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

D5405, D5407 SERIES GENERAL CARBIDE DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)		Vc (m/min)	Parameter	Drill Diameter (mm)							
					1.0	2.0			3.0	4.0	5.0	6.0	8.0	10.0	12.0	13.0
P	1	Non-alloy steel	55	RPM FEED	17510	8750	70	RPM FEED	7430	5570	4460	3710	2790	2230	1860	1710
	2		0.02-0.03	0.02-0.04	0.03-0.05	0.03-0.06	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.10-0.14	0.12-0.16				
	3		45	RPM FEED	14320	7160	60	RPM FEED	6370	4770	3820	3180	2390	1910	1590	1470
	4		0.02-0.03	0.02-0.04	0.03-0.05	0.03-0.06	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.10-0.14	0.12-0.16				
	5															
	6	Low alloy steel	35	RPM FEED	11140	5570	50	RPM FEED	5310	3980	3180	2650	1990	1590	1330	1220
	7		0.02-0.03	0.02-0.04	0.03-0.05	0.03-0.06	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.10-0.14	0.12-0.16				
	8															
	9															
	10		High alloyed steel, and tool steel													
	11															
M	12	Stainless steel	15	RPM FEED	4770	2390	25	RPM FEED	2650	1990	1590	1330	990	800	660	610
	13		0.01-0.02	0.01-0.03	0.02-0.04	0.02-0.05	0.03-0.06	0.04-0.07	0.06-0.09	0.07-0.11	0.08-0.12	0.09-0.13				
	14															
K	15	Grey cast iron	25	RPM FEED	7960	3980	45	RPM FEED	4770	3580	2860	2390	1790	1430	1190	1100
	16		0.03-0.04	0.03-0.05	0.04-0.06	0.04-0.07	0.05-0.08	0.06-0.09	0.09-0.12	0.12-0.16	0.14-0.18	0.16-0.20				
	17	Nodular cast iron														
	18															
	19	Malleable cast iron														
	20															
N	21	Aluminum-wrought alloy	100	RPM FEED	31830	15920	140	RPM FEED	14850	11140	8910	7430	5570	4460	3710	3430
	22		0.04-0.05	0.04-0.06	0.05-0.07	0.05-0.08	0.06-0.09	0.08-0.11	0.12-0.15	0.15-0.19	0.19-0.23	0.21-0.25				
	23	Aluminum-cast, alloyed	90	RPM FEED	28650	14320	120	RPM FEED	12730	9550	7640	6370	4770	3820	3180	2940
	24		0.04-0.05	0.04-0.06	0.05-0.07	0.05-0.08	0.06-0.09	0.08-0.11	0.12-0.15	0.15-0.19	0.19-0.23	0.21-0.25				
	25		70	RPM FEED	22280	11140	100	RPM FEED	10610	7960	6370	5310	3980	3180	2650	2450
	26		0.04-0.05	0.04-0.06	0.05-0.07	0.05-0.08	0.06-0.09	0.08-0.11	0.12-0.15	0.15-0.19	0.19-0.23	0.21-0.25				
	27	Copper and Copper Alloys (Bronze / Brass)	60	RPM FEED	19100	9550	80	RPM FEED	8490	6370	5090	4240	3180	2550	2120	1960
	28		0.04-0.05	0.04-0.06	0.05-0.07	0.05-0.08	0.06-0.09	0.08-0.11	0.12-0.15	0.15-0.19	0.19-0.23	0.21-0.25				
	29															
	30	Non Metallic Materials														
S	31	Heat Resistant Super Alloys														
	32															
	33															
	34															
	35															
	36															
	37															
36	Titanium Alloys	10	RPM FEED	3180	1590	20	RPM FEED	2120	1590	1270	1060	800	640	530	490	
37		0.01-0.02	0.01-0.03	0.02-0.04	0.02-0.05	0.03-0.06	0.04-0.07	0.06-0.09	0.07-0.11	0.08-0.12	0.09-0.13					
H	38	Hardened steel														
	39															
	40															
	41															



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING



HSS-PM

MULTI-1 DRILLS

MULTI-1 BOHRER

- Premium HSS-PM Drills
For Wide Range of Applications Particularly Stainless Steels and Titanium
- HSS-PM Bohrer
Für ein breites Anwendungsspektrum, insbesondere Edelstahl und Titan

SELECTION GUIDE



SERIES	CDRA03	CDRA04
TOOL MATERIAL	HSS-PM	
LENGTH	STUB	JOBBER
SIZE MIN	D1.0	D2.0
SIZE MAX	D13.0	D13.0
PAGE	171	174

SURFACE TREATMENT

TiAIN

HSS-PM MULTI-1 DRILLS

Premium HSS-PM Drills for Wide Range of Applications Particularly Stainless Steels and Titanium

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.177



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	CDRA03	CDRA04	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	
	7		Quenched & Tempered	275	29	○	○	
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11			Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10	◎	◎	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19		Ferritic	130				
	20	Malleable cast iron	Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	
	22		Curable Hardened	100		◎	◎	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15		
	32			Cured	280	30		
	33			Annealed	250	25		
	34		Ni or Co Based	Cured	350	38		
	35			Cast	320	34		
	36			Titanium Alloys	Pure Titanium	400 Rm		
	37				Alpha + Beta Alloys Hardened	1050 Rm		○
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40		Cast	400	42			
41	Hardened Cast Iron	Hardened	550	55				

Y&G MULTI-1 DRILLS

CDRA03 SERIES

HSS-PM, MULTI-1 DRILLS



- HSS-PM MULTI-1 BOHRER
- Forets MULTI-1 HSS-PM Premium, série extra-courte
- PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM

STUB

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

- Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.
- Advantage** : Point shape to maximize self-centering. Flute design for the best chip evacuation. Premium powder materials with excellent toughness.

- Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc 30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.
- Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff. Bohrergeometrie für optimale Spanabfuhr. Premium Pulverstahl mit ausgezeichneter Zähigkeit.

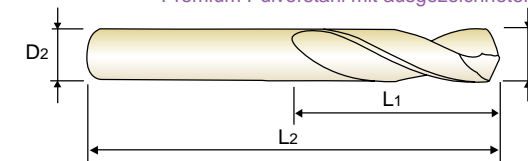

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA03010	1.0	3	6	38
CDRA03011	1.1	3	7	39
CDRA03012	1.2	3	8	40
CDRA03013	1.3	3	8	40
CDRA03014	1.4	3	9	41
CDRA03015	1.5	3	9	41
CDRA03016	1.6	3	10	42
CDRA03017	1.7	3	10	42
CDRA03018	1.8	3	11	43
CDRA03019	1.9	3	11	43
CDRA03020	2.0	3	12	44
CDRA03021	2.1	3	12	44
CDRA03022	2.2	3	13	45
CDRA03023	2.3	3	13	45
CDRA03024	2.4	3	14	46
CDRA03025	2.5	3	14	46
CDRA03026	2.6	3	14	46
CDRA03027	2.7	3	16	48
CDRA03028	2.8	3	16	48
CDRA03029	2.9	3	16	48
CDRA03030	3.0	3	16	48
CDRA03031	3.1	4	18	50
CDRA03032	3.2	4	18	50
CDRA03033	3.3	4	18	50

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA03034	3.4	4	20	52
CDRA03035	3.5	4	20	52
CDRA03036	3.6	4	20	52
CDRA03037	3.7	4	20	52
CDRA03038	3.8	4	22	54
CDRA03039	3.9	4	22	54
CDRA03040	4.0	4	22	54
CDRA03041	4.1	6	22	66
CDRA03042	4.2	6	22	66
CDRA03043	4.3	6	24	68
CDRA03044	4.4	6	24	68
CDRA03045	4.5	6	24	68
CDRA03046	4.6	6	24	68
CDRA03047	4.7	6	24	68
CDRA03048	4.8	6	26	70
CDRA03049	4.9	6	26	70
CDRA03050	5.0	6	26	70
CDRA03051	5.1	6	26	70
CDRA03052	5.2	6	26	70
CDRA03053	5.3	6	26	70
CDRA03054	5.4	6	28	72
CDRA03055	5.5	6	28	72
CDRA03056	5.6	6	28	72
CDRA03057	5.7	6	28	72

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323																				
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	23
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	210
Recommended	◎	◎	○			◎	○				○	◎		○						

ISO	N									S						H					
	Aluminum-wrought alloy			Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc	15	30	25	38	34						15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

Y/G MULTI-1 DRILLS

CDRA03 SERIES

HSS-PM, MULTI-1 DRILLS

STUB

- HSS-PM MULTI-1 BOHRER
- Forets MULTI-1 HSS-PM Premium, série extra-courte
- PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRC30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

► **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

► **Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc 30-45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

► **Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.

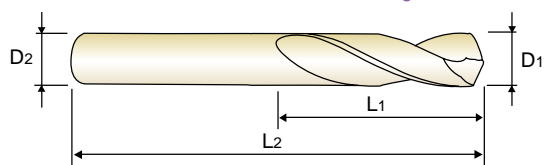

up to 1.4mm over 1.4mm



up to 1.9mm over 1.9mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA03058	5.8	6	28	72
CDRA03059	5.9	6	28	72
CDRA03060	6.0	6	28	72
CDRA03061	6.1	8	31	75
CDRA03062	6.2	8	31	75
CDRA03063	6.3	8	31	75
CDRA03064	6.4	8	31	75
CDRA03065	6.5	8	31	75
CDRA03066	6.6	8	31	75
CDRA03067	6.7	8	31	75
CDRA03068	6.8	8	34	78
CDRA03069	6.9	8	34	78
CDRA03070	7.0	8	34	78
CDRA03071	7.1	8	34	78
CDRA03072	7.2	8	34	78
CDRA03073	7.3	8	34	78
CDRA03074	7.4	8	34	78
CDRA03075	7.5	8	34	78
CDRA03076	7.6	8	37	81
CDRA03077	7.7	8	37	81
CDRA03078	7.8	8	37	81
CDRA03079	7.9	8	37	81
CDRA03080	8.0	8	37	81
CDRA03081	8.1	10	37	87

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA03082	8.2	10	37	87
CDRA03083	8.3	10	37	87
CDRA03084	8.4	10	37	87
CDRA03085	8.5	10	37	87
CDRA03086	8.6	10	40	90
CDRA03087	8.7	10	40	90
CDRA03088	8.8	10	40	90
CDRA03089	8.9	10	40	90
CDRA03090	9.0	10	40	90
CDRA03091	9.1	10	40	90
CDRA03092	9.2	10	40	90
CDRA03093	9.3	10	40	90
CDRA03094	9.4	10	40	90
CDRA03095	9.5	10	40	90
CDRA03096	9.6	10	43	93
CDRA03097	9.7	10	43	93
CDRA03098	9.8	10	43	93
CDRA03099	9.9	10	43	93
CDRA03100	10.0	10	43	93
CDRA03101	10.1	12	43	100
CDRA03102	10.2	12	43	100
CDRA03103	10.3	12	43	100
CDRA03104	10.4	12	43	100
CDRA03105	10.5	12	43	100

► NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S							H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400Rm	1050Rm	630	550	
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y/G MULTI-1 DRILLS

CDRA03 SERIES

HSS-PM, MULTI-1 DRILLS

STUB

- HSS-PM MULTI-1 BOHRER
- Forets MULTI-1 HSS-PM Premium, série extra-courte
- PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRC30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

► **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

► **Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc 30-45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

► **Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.

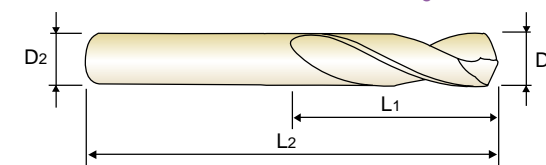

up to 1.4mm over 1.4mm



up to 1.9mm over 1.9mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA03106	10.6	12	43	100
CDRA03107	10.7	12	47	104
CDRA03108	10.8	12	47	104
CDRA03109	10.9	12	47	104
CDRA03110	11.0	12	47	104
CDRA03111	11.1	12	47	104
CDRA03112	11.2	12	47	104
CDRA03113	11.3	12	47	104
CDRA03114	11.4	12	47	104
CDRA03115	11.5	12	47	104
CDRA03116	11.6	12	47	104
CDRA03117	11.7	12	47	104
CDRA03118	11.8	12	47	104

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA03119	11.9	12	51	108
CDRA03120	12.0	12	51	108
CDRA03121	12.1	12	51	108
CDRA03122	12.2	12	51	108
CDRA03123	12.3	12	51	108
CDRA03124	12.4	12	51	108
CDRA03125	12.5	12	51	108
CDRA03126	12.6	12	51	108
CDRA03127	12.7	12	51	108
CDRA03128	12.8	12	51	108
CDRA03129	12.9	12	51	108
CDRA03130	13.0	12	51	108

© : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S							H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400Rm	1050Rm	630	550	
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y/G MULTI-1 DRILLS

CDRA04 SERIES

HSS-PM, MULTI-1 DRILLS

JOBBER

- HSS-PM MULTI-1 BOHRER
- Forets MULTI-1 HSS-PM Premium, série courte
- PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


KURZ
COURTE
CORTA

► **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

► **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

► **Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc 30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

► **Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.

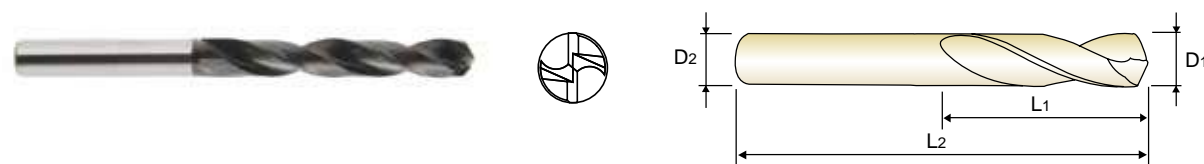

Unit : mm					Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
CDRA04020	2.0	3	24	56	CDRA04044	4.4	6	47	89
CDRA04021	2.1	3	24	56	CDRA04045	4.5	6	47	89
CDRA04022	2.2	3	25	56	CDRA04046	4.6	6	47	89
CDRA04023	2.3	3	25	56	CDRA04047	4.7	6	47	89
CDRA04024	2.4	3	30	61	CDRA04048	4.8	6	52	94
CDRA04025	2.5	3	30	61	CDRA04049	4.9	6	52	94
CDRA04026	2.6	3	30	61	CDRA04050	5.0	6	52	94
CDRA04027	2.7	3	33	64	CDRA04051	5.1	6	52	94
CDRA04028	2.8	3	33	64	CDRA04052	5.2	6	52	94
CDRA04029	2.9	3	33	64	CDRA04053	5.3	6	52	94
CDRA04030	3.0	3	33	64	CDRA04054	5.4	6	57	99
CDRA04031	3.1	4	36	68	CDRA04055	5.5	6	57	99
CDRA04032	3.2	4	36	68	CDRA04056	5.6	6	57	99
CDRA04033	3.3	4	36	68	CDRA04057	5.7	6	57	99
CDRA04034	3.4	4	39	71	CDRA04058	5.8	6	57	99
CDRA04035	3.5	4	39	71	CDRA04059	5.9	6	57	99
CDRA04036	3.6	4	39	71	CDRA04060	6.0	6	57	99
CDRA04037	3.7	4	39	71	CDRA04061	6.1	8	63	107
CDRA04038	3.8	4	43	75	CDRA04062	6.2	8	63	107
CDRA04039	3.9	4	43	75	CDRA04063	6.3	8	63	107
CDRA04040	4.0	4	43	75	CDRA04064	6.4	8	63	107
CDRA04041	4.1	6	43	85	CDRA04065	6.5	8	63	107
CDRA04042	4.2	6	43	85	CDRA04066	6.6	8	63	107
CDRA04043	4.3	6	47	89	CDRA04067	6.7	8	63	107

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H					
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400Rm	1050Rm	400	550	
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y/G MULTI-1 DRILLS

CDRA04 SERIES

HSS-PM, MULTI-1 DRILLS

JOBBER

- HSS-PM MULTI-1 BOHRER
- Forets MULTI-1 HSS-PM Premium, série courte
- PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM


KURZ
COURTE
CORTA

► **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30~45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

► **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

► **Anwendung** : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc 30~45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

► **Vorteile** : Maximale Selbstzentrierung durch besonderen Spitzenanschliff
Bohrergeometrie für optimale Spanabfuhr.
Premium Pulverstahl mit ausgezeichneter Zähigkeit.

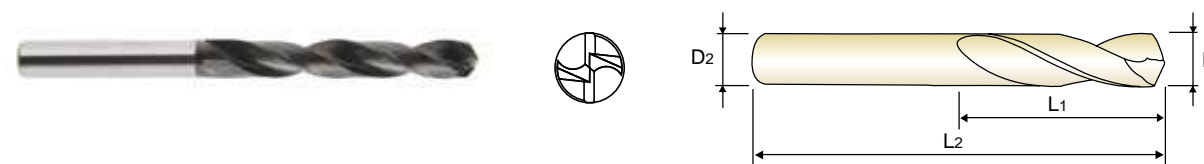

Unit : mm					Unit : mm				
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
CDRA04068	6.8	8	69	113	CDRA04092	9.2	10	81	131
CDRA04069	6.9	8	69	113	CDRA04093	9.3	10	81	131
CDRA04070	7.0	8	69	113	CDRA04094	9.4	10	81	131
CDRA04071	7.1	8	69	113	CDRA04095	9.5	10	81	131
CDRA04072	7.2	8	69	113	CDRA04096	9.6	10	87	137
CDRA04073	7.3	8	69	113	CDRA04097	9.7	10	87	137
CDRA04074	7.4	8	69	113	CDRA04098	9.8	10	87	137
CDRA04075	7.5	8	69	113	CDRA04099	9.9	10	87	137
CDRA04076	7.6	8	75	119	CDRA04100	10.0	10	87	137
CDRA04077	7.7	8	75	119	CDRA04101	10.1	12	87	144
CDRA04078	7.8	8	75	119	CDRA04102	10.2	12	87	144
CDRA04079	7.9	8	75	119	CDRA04103	10.3	12	87	144
CDRA04080	8.0	8	75	119	CDRA04104	10.4	12	87	144
CDRA04081	8.1	10	75	125	CDRA04105	10.5	12	87	144
CDRA04082	8.2	10	75	125	CDRA04106	10.6	12	87	144
CDRA04083	8.3	10	75	125	CDRA04107	10.7	12	94	151
CDRA04084	8.4	10	75	125	CDRA04108	10.8	12	94	151
CDRA04085	8.5	10	75	125	CDRA04109	10.9	12	94	151
CDRA04086	8.6	10	81	131	CDRA04110	11.0	12	94	151
CDRA04087	8.7	10	81	131	CDRA04111	11.1	12	94	151
CDRA04088	8.8	10	81	131	CDRA04112	11.2	12	94	151
CDRA04089	8.9	10	81	131	CDRA04113	11.3	12	94	151
CDRA04090	9.0	10	81	131	CDRA04114	11.4	12	94	151
CDRA04091	9.1	10	81	131	CDRA04115	11.5	12	94	151

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H					
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400Rm	1050Rm	400	550	
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG MULTI-1 DRILLS

CDRA04 SERIES

HSS-PM, MULTI-1 DRILLS

JOBBER

- HSS-PM MULTI-1 BOHRER
- Forets MULTI-1 HSS-PM Premium, série courte
- PUNTA GAMBO CILINDRICO MULTI-1, HSS-PM

KURZ
COURTE
CORTA

Application : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.

Advantage : Point shape to maximize self-centering. Flute design for the best chip evacuation. Premium powder materials with excellent toughness.

Anwendung : Baustähle, Kohlenstoffstähle, legierte Stähle, vorgehärtete Stähle, Formstähle, rostfreie Stähle, gehärtete Stähle (HRc 30-45), Gusseisen, Aluminiumlegierungen, Nichteisen Legierungen, Titan.

Vorteile : Maximale Selbstzentrierung durch besonderen Spitzenanschliff. Bohrergeometrie für optimale Spanabfuhr. Premium Pulverstahl mit ausgezeichneter Zähigkeit.



EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA04116	11.6	12	94	151
CDRA04117	11.7	12	94	151
CDRA04118	11.8	12	94	151
CDRA04119	11.9	12	101	158
CDRA04120	12.0	12	101	158
CDRA04121	12.1	12	101	158
CDRA04122	12.2	12	101	158
CDRA04123	12.3	12	101	158

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA04124	12.4	12	101	158
CDRA04125	12.5	12	101	158
CDRA04126	12.6	12	101	158
CDRA04127	12.7	12	101	158
CDRA04128	12.8	12	101	158
CDRA04129	12.9	12	101	158
CDRA04130	13.0	12	101	158

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	190	250	270	300	180	290	320	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG MULTI-1 DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

CDRA03, CDRA04 SERIES MULTI-1 DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)									
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0		
P	1	Non-alloy steel	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060		
	2		FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30			
	3		RPM	5570	3710	2790	2230	1860	1390	1110	930			
	4		FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30			
	5	Low alloy steel	35	RPM	5570	3710	2790	2230	1860	1390	1110	930		
	6		FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30			
	7		RPM	4770	3180	2390	1910	1590	1190	950	800			
	8		FEED	0.03-0.05	0.06-0.10	0.07-0.13	0.10-0.16	0.12-0.18	0.14-0.20	0.14-0.24	0.16-0.26			
	9	High alloyed steel, and tool steel	30	RPM	5570	3710	2790	2230	1860	1390	1110	930		
	10		FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30			
	11		RPM	4770	3180	2390	1910	1590	1190	950	800			
12	FEED		0.03-0.05	0.06-0.10	0.07-0.13	0.10-0.16	0.12-0.18	0.14-0.20	0.14-0.24	0.16-0.26				
M	12	Stainless steel	20	RPM	3180	2120	1590	1270	1060	800	640	530		
	13		FEED	0.03-0.07	0.05-0.09	0.06-0.12	0.09-0.15	0.12-0.18	0.18-0.24	0.20-0.30	0.26-0.36			
	14	RPM	2390	1590	1190	950	800	600	480	400				
K	15	Grey cast iron	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060		
	16		FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32			
	17		Nodular cast iron											
	18													
	19	Malleable cast iron												
	20													
N	21	Aluminum-wrought alloy	90	RPM	14320	9550	7160	5730	4770	3580	2860	2390		
	22		FEED	0.13-0.17	0.23-0.27	0.27-0.33	0.33-0.39	0.40-0.46	0.45-0.51	0.51-0.61	0.63-0.73			
	23	Aluminum-cast, alloyed	80	RPM	14320	9550	7160	5730	4770	3580	2860	2390		
	24		FEED	0.13-0.17	0.23-0.27	0.27-0.33	0.33-0.39	0.40-0.46	0.45-0.51	0.51-0.61	0.63-0.73			
	25		RPM	12730	8490	6370	5090	4240	3180	2550	2120			
	26		FEED	0.13-0.17	0.23-0.27	0.27-0.33	0.33-0.39	0.40-0.46	0.45-0.51	0.51-0.61	0.63-0.73			
	27	Copper and Copper Alloys (Bronze / Brass)	70	RPM	11140	7430	5570	4460	3710	2790	2230	1860		
	28		FEED	0.10-0.14	0.15-0.19	0.20-0.26	0.24-0.30	0.28-0.34	0.30-0.36	0.34-0.44	0.36-0.46			
	29		Non Metallic Materials											
	30													
S	31	Heat Resistant Super Alloys												
	32													
	33													
	34													
	35													
	36		Titanium Alloys	5	RPM	800	530	400	320	270	200	160	130	
	37			FEED	0.02-0.05	0.03-0.07	0.04-0.08	0.06-0.12	0.07-0.13	0.09-0.15	0.12-0.22	0.14-0.24		
H	38	Hardened steel												
	39		Chilled Cast Iron											
	40													
	41		Hardened Cast Iron											

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING



HSSCo8 & HSS-E

HPD STRAIGHT SHANK DRILLS

HPD BOHRER

- High Precision Drilling for General Steels & Stainless Steels
- Hochpräzises Bohren für allgemeine Stähle und rostfreie Stähle

SELECTION GUIDE



SERIES

D4541

D4542

TOOL MATERIAL

HSSCo8

LENGTH

STUB

JOBBER

SIZE MIN

D2.0

D2.0

SIZE MAX

D13.0

D32.0

PAGE

182

186

SURFACE TREATMENT

TiN

HSSCo8 & HSS-E HPD STRAIGHT SHANK DRILLS

High Precision Drilling for General Steels & Stainless Steels

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.198



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	
	2		About 0.45% C Annealed	190	13
	3		About 0.45% C Quenched & Tempered	250	25
	4		About 0.75% C Annealed	270	28
	5		About 0.75% C Quenched & Tempered	300	32
	6	Low alloy steel	Annealed	180	10
	7		Quenched & Tempered	275	29
	8		Quenched & Tempered	300	32
	9		Quenched & Tempered	350	38
	10	High alloyed steel, and tool steel	Annealed	200	15
	11		Quenched & Tempered	325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15
	13		Martensitic Quenched & Tempered	240	23
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10
	16		Pearlitic (Martensitic)	260	26
	17	Nodular cast iron	Ferritic	160	3
	18		Pearlitic	250	25
	19	Malleable cast iron	Ferritic	130	
	20		Pearlitic	230	21
N	21	Aluminum-wrought alloy	Not Curable	60	
	22		Curable Hardened	100	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	
	24		≤ 12% Si, Curable Hardened	90	
	25		> 12% Si, Not Curable	130	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27		CuZn, CuSnZn (Brass)	90	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100	
	29		Duroplastic, Fiber Reinforced Plastic		
	30	Rubber, Wood, etc.			
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34		Ni or Co Based Cured	350	38
	35	Cast	320	34	
	36	Titanium Alloys	Pure Titanium	400 Rm	
	37		Alpha + Beta Alloys Hardened	1050 Rm	
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41		Hardened	550	55

DJ543	DJ544
HSS-E	
STUB	JOBBER
D2.0	D2.0
D13.0	D20.0
192	195
TiN	



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	
	2		About 0.45% C Annealed	190	13
	3		About 0.45% C Quenched & Tempered	250	25
	4		About 0.75% C Annealed	270	28
	5		About 0.75% C Quenched & Tempered	300	32
	6	Low alloy steel	Annealed	180	10
	7		Quenched & Tempered	275	29
	8		Quenched & Tempered	300	32
	9		Quenched & Tempered	350	38
	10	High alloyed steel, and tool steel	Annealed	200	15
	11		Quenched & Tempered	325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15
	13		Martensitic Quenched & Tempered	240	23
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10
	16		Pearlitic (Martensitic)	260	26
	17	Nodular cast iron	Ferritic	160	3
	18		Pearlitic	250	25
	19	Malleable cast iron	Ferritic	130	
	20		Pearlitic	230	21
N	21	Aluminum-wrought alloy	Not Curable	60	
	22		Curable Hardened	100	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	
	24		≤ 12% Si, Curable Hardened	90	
	25		> 12% Si, Not Curable	130	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27		CuZn, CuSnZn (Brass)	90	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100	
	29		Duroplastic, Fiber Reinforced Plastic		
	30	Rubber, Wood, etc.			
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34		Ni or Co Based Cured	350	38
	35	Cast	320	34	
	36	Titanium Alloys	Pure Titanium	400 Rm	
	37		Alpha + Beta Alloys Hardened	1050 Rm	
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41		Hardened	550	55

HSSCo8, HPD TWIST DRILLS for STEELS



STUB

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série extra-courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

Application : Designed for accurate drilling on NC/CNC machines. Drilling hard and tough materials, alloyed tool steels, inconel, nimonic, cast iron, aluminum die casting, etc.
Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and stub length - increasing rigidity, reducing vibration and deflection. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity

Anwendung : Für präzises Bohren mit NC/CNC Maschinen, geeignet zum Bearbeiten von harten und zähen Werkstücken, Legierungen, Werkzeugstahl, Nimonic, Inconel, Gusseisen, Aluminium-Guss usw.
Vorteile : Durch Kreuzanschliff gute Spanentfernung, reduzierter Druck, verbesserte Genauigkeit, selbstzentriert, extra kurze Ausführung, verbesserte Stabilität, weniger Vibrationen und Abdrängung. Premium Kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

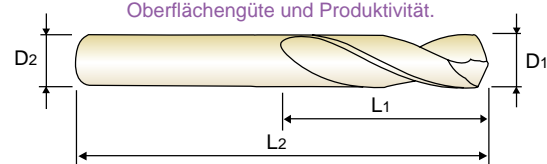

D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
D4541020	2.00	12	44
D4541920	2.05	12	44
D4541021	2.10	12	44
D4541921	2.15	13	45
D4541022	2.20	13	45
D4541922	2.25	13	45
D4541023	2.30	13	45
D4541923	2.35	13	45
D4541024	2.40	14	46
D4541924	2.45	14	46
D4541025	2.50	14	46
D4541925	2.55	14	46
D4541026	2.60	14	46
D4541926	2.65	14	46
D4541027	2.70	16	48
D4541927	2.75	16	48
D4541028	2.80	16	48
D4541928	2.85	16	48
D4541029	2.90	16	48
D4541929	2.95	16	48
D4541030	3.00	16	48
D4541930	3.05	18	50

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
D4541031	3.10	18	50
D4541931	3.15	18	50
D4541032	3.20	18	50
D4541932	3.25	18	50
D4541033	3.30	18	50
D4541933	3.35	18	50
D4541034	3.40	20	52
D4541934	3.45	20	52
D4541035	3.50	20	52
D4541935	3.55	20	52
D4541036	3.60	20	52
D4541936	3.65	20	52
D4541037	3.70	20	52
D4541937	3.75	20	52
D4541038	3.80	22	54
D4541938	3.85	22	54
D4541039	3.90	22	54
D4541939	3.95	22	54
D4541040	4.00	22	54
D4541940	4.05	22	66
D4541041	4.10	22	66
D4541941	4.15	22	66

TiCN(D7541), TiAlN(DQ541) are available on your request.

NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, HPD TWIST DRILLS for STEELS



STUB

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série extra-courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

Application : Designed for accurate drilling on NC/CNC machines. Drilling hard and tough materials, alloyed tool steels, inconel, nimonic, cast iron, aluminum die casting, etc.
Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and stub length - increasing rigidity, reducing vibration and deflection. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity

Anwendung : Für präzises Bohren mit NC/CNC Maschinen, geeignet zum Bearbeiten von harten und zähen Werkstücken, Legierungen, Werkzeugstahl, Nimonic, Inconel, Gusseisen, Aluminium-Guss usw.
Vorteile : Durch Kreuzanschliff gute Spanentfernung, reduzierter Druck, verbesserte Genauigkeit, selbstzentriert, extra kurze Ausführung, verbesserte Stabilität, weniger Vibrationen und Abdrängung. Premium Kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

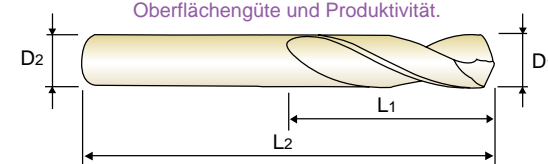

D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
D4541042	4.20	22	66
D4541942	4.25	22	66
D4541043	4.30	24	68
D4541943	4.35	24	68
D4541044	4.40	24	68
D4541944	4.45	24	68
D4541045	4.50	24	68
D4541945	4.55	24	68
D4541046	4.60	24	68
D4541946	4.65	24	68
D4541047	4.70	24	68
D4541947	4.75	24	68
D4541048	4.80	26	70
D4541948	4.85	26	70
D4541049	4.90	26	70
D4541949	4.95	26	70
D4541050	5.00	26	70
D4541950	5.05	26	70
D4541051	5.10	26	70
D4541951	5.15	26	70
D4541052	5.20	26	70
D4541952	5.25	26	70

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
D4541053	5.30	26	70
D4541953	5.35	28	72
D4541054	5.40	28	72
D4541954	5.45	28	72
D4541055	5.50	28	72
D4541955	5.55	28	72
D4541056	5.60	28	72
D4541956	5.65	28	72
D4541057	5.70	28	72
D4541957	5.75	28	72
D4541058	5.80	28	72
D4541958	5.85	28	72
D4541059	5.90	28	72
D4541959	5.95	28	72
D4541060	6.00	28	72
D4541061	6.10	31	75
D4541062	6.20	31	75
D4541063	6.30	31	75
D4541064	6.40	31	75
D4541065	6.50	31	75
D4541965	6.55	31	75
D4541066	6.60	31	75

TiCN(D7541), TiAlN(DQ541) are available on your request.

NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



D4541 SERIES

HSSCo8, HPD TWIST DRILLS for STEELS **STUB**



- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE **EXTRA KURZ**
- Forets HPD HSSCo Premium pour Aciers, série extra-courte **EXTRA-COURTE**
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI **EXTRA CORTA**

► **Application** : Designed for accurate drilling on NC/CNC machines. Drilling hard and tough materials, alloyed tool steels, inconel, nimonic, cast iron, aluminium die casting, etc.

► **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and stub length - increasing rigidity, reducing vibration and deflection. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity

► **Anwendung** : Für präzises Bohren mit NC/CNC Maschinen, geeignet zum Bearbeiten von harten und zähen Werkstücken, Legierungen, Werkzeugstahl, Nimonic, Inconel, Gusseisen, Aluminium-Guss usw.

► **Vorteile** : Durch Kreuzanschliff gute Spanentfernung, reduzierter Druck, verbesserte Genauigkeit, selbstzentriert, extra kurze Ausführung, verbesserte Stabilität, weniger Vibrationen und Abdrängung, Premium Kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

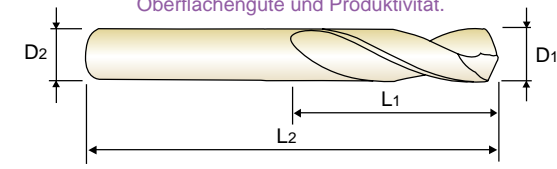

HSS Co8 25° h7 h8 130° P.198-199

D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length	
			D1	L2
TiN				
D4541966	6.65	31	75	
D4541067	6.70	31	75	
D4541068	6.80	34	78	
D4541069	6.90	34	78	
D4541070	7.00	34	78	
D4541071	7.10	34	78	
D4541072	7.20	34	78	
D4541073	7.30	34	78	
D4541973	7.35	34	78	
D4541074	7.40	34	78	
D4541075	7.50	34	78	
D4541975	7.55	37	81	
D4541076	7.60	37	81	
D4541976	7.65	37	81	
D4541077	7.70	37	81	
D4541078	7.80	37	81	
D4541079	7.90	37	81	
D4541080	8.00	37	81	
D4541081	8.10	37	87	
D4541082	8.20	37	87	
D4541083	8.30	37	87	
D4541983	8.35	37	87	

EDP No.	Drill Diameter	Flute Length	Overall Length	
			D1	L2
TiN				
D4541084	8.40	37	87	
D4541085	8.50	37	87	
D4541985	8.55	40	90	
D4541086	8.60	40	90	
D4541986	8.65	40	90	
D4541087	8.70	40	90	
D4541088	8.80	40	90	
D4541089	8.90	40	90	
D4541090	9.00	40	90	
D4541091	9.10	40	90	
D4541092	9.20	40	90	
D4541992	9.25	40	90	
D4541093	9.30	40	90	
D4541993	9.35	40	90	
D4541094	9.40	40	90	
D4541994	9.45	40	90	
D4541095	9.50	40	90	
D4541995	9.55	43	93	
D4541096	9.60	43	93	
D4541996	9.65	43	93	
D4541097	9.70	43	93	
D4541098	9.80	43	93	

► TiCN(D7541), TiAlN(DQ541) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H						
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400Rm	1050Rm	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	



D4541 SERIES

HSSCo8, HPD TWIST DRILLS for STEELS **STUB**



- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE **EXTRA KURZ**
- Forets HPD HSSCo Premium pour Aciers, série extra-courte **EXTRA-COURTE**
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI **EXTRA CORTA**

► **Application** : Designed for accurate drilling on NC/CNC machines. Drilling hard and tough materials, alloyed tool steels, inconel, nimonic, cast iron, aluminium die casting, etc.

► **Advantage** : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and stub length - increasing rigidity, reducing vibration and deflection. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity

► **Anwendung** : Für präzises Bohren mit NC/CNC Maschinen, geeignet zum Bearbeiten von harten und zähen Werkstücken, Legierungen, Werkzeugstahl, Nimonic, Inconel, Gusseisen, Aluminium-Guss usw.

► **Vorteile** : Durch Kreuzanschliff gute Spanentfernung, reduzierter Druck, verbesserte Genauigkeit, selbstzentriert, extra kurze Ausführung, verbesserte Stabilität, weniger Vibrationen und Abdrängung, Premium Kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

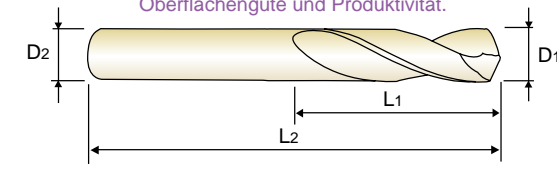

HSS Co8 25° h7 h8 130° P.198-199

D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length	
			D1	L2
TiN				
D4541099	9.90	43	93	
D4541999	9.95	43	93	
D4541100	10.00	43	93	
D4541101	10.10	43	100	
D4541102	10.20	43	100	
D4541802	10.25	43	100	
D4541103	10.30	43	100	
D4541803	10.35	43	100	
D4541104	10.40	43	100	
D4541105	10.50	43	100	
D4541805	10.55	43	100	
D4541106	10.60	43	100	
D4541806	10.65	47	104	
D4541107	10.70	47	104	
D4541108	10.80	47	104	
D4541109	10.90	47	104	
D4541809	10.95	47	104	
D4541110	11.00	47	104	
D4541111	11.10	47	104	
D4541112	11.20	47	104	
D4541812	11.25	47	104	

EDP No.	Drill Diameter	Flute Length	Overall Length	
			D1	L2
TiN				
D4541113	11.30	47	104	
D4541813	11.35	47	104	
D4541114	11.40	47	104	
D4541115	11.50	47	104	
D4541815	11.55	47	104	
D4541116	11.60	47	104	
D4541117	11.70	47	104	
D4541118	11.80	47	104	
D4541119	11.90	51	108	
D4541120	12.00	51	108	
D4541121	12.10	51	108	
D4541122	12.20	51	108	
D4541123	12.30	51	108	
D4541124	12.40	51	108	
D4541125	12.50	51	108	
D4541126	12.60	51	108	
D4541127	12.70	51	108	
D4541128	12.80	51	108	
D4541129	12.90	51	108	
D4541130	13.00	51	108	

► TiCN(D7541), TiAlN(DQ541) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H						
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400Rm	1050Rm	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	



D4542 SERIES

HSSCo8, HPD TWIST DRILLS for STEELS

JOBBER

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI



**KURZ
COURTE
CORTA**

Application : Designed for high speed non-step 4D-5D drilling. Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.

Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and jobbers length - increasing rigidity and suitable for 4D-5D drilling. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

Anwendung : Zum Hochgeschwindigkeitsbohren 4D-5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.

Vorteile : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

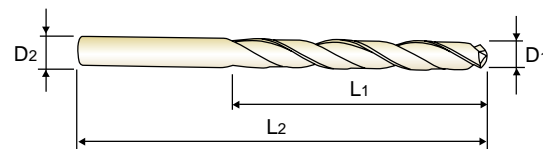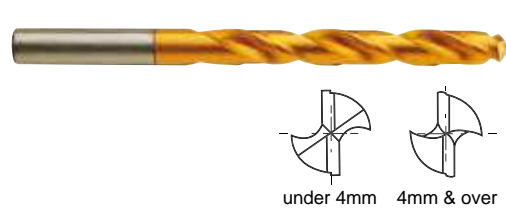

Icons for HSS Co8, 30°, h7, h6, h8, 130°, and P.198-199. Text: up to 13mm over 13mm. Unit: mm.

D1=D2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542020	2.00	24	56
D4542920	2.05	24	56
D4542021	2.10	24	56
D4542921	2.15	27	59
D4542022	2.20	27	59
D4542922	2.25	27	59
D4542023	2.30	27	59
D4542923	2.35	27	59
D4542024	2.40	30	62
D4542924	2.45	30	62
D4542025	2.50	30	62
D4542925	2.55	30	62
D4542026	2.60	30	62
D4542926	2.65	30	62
D4542027	2.70	33	65
D4542927	2.75	33	65
D4542028	2.80	33	65
D4542928	2.85	33	65
D4542029	2.90	33	65
D4542929	2.95	33	65
D4542030	3.00	33	65
D4542930	3.05	36	68

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542031	3.10	36	68
D4542931	3.15	36	68
D4542032	3.20	36	68
D4542932	3.25	36	68
D4542033	3.30	36	68
D4542933	3.35	36	68
D4542034	3.40	39	71
D4542934	3.45	39	71
D4542035	3.50	39	71
D4542935	3.55	39	71
D4542036	3.60	39	71
D4542936	3.65	39	71
D4542037	3.70	39	71
D4542937	3.75	39	71
D4542038	3.80	43	75
D4542938	3.85	43	75
D4542039	3.90	43	75
D4542939	3.95	43	75
D4542040	4.00	43	75
D4542940	4.05	43	87
D4542041	4.10	43	87
D4542941	4.15	43	87

TiCN(D7542), TiAlN(DQ542) are available on your request.

▶ NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



D4542 SERIES

HSSCo8, HPD TWIST DRILLS for STEELS

JOBBER

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI



**KURZ
COURTE
CORTA**

Application : Designed for high speed non-step 4D-5D drilling. Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.

Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and jobbers length - increasing rigidity and suitable for 4D-5D drilling. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

Anwendung : Zum Hochgeschwindigkeitsbohren 4D-5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.

Vorteile : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

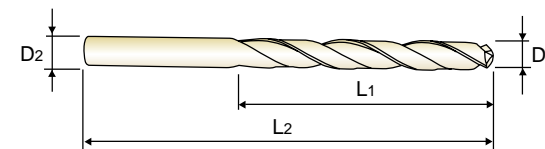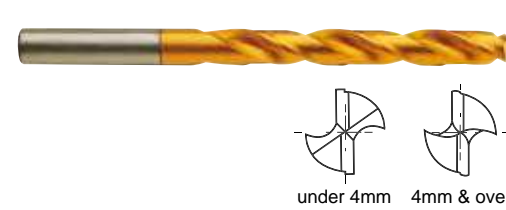

Icons for HSS Co8, 30°, h7, h6, h8, 130°, and P.198-199. Text: up to 13mm over 13mm. Unit: mm.

D1=D2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542042	4.20	43	87
D4542942	4.25	43	87
D4542043	4.30	47	91
D4542943	4.35	47	91
D4542044	4.40	47	91
D4542944	4.45	47	91
D4542045	4.50	47	91
D4542945	4.55	47	91
D4542046	4.60	47	91
D4542946	4.65	47	91
D4542047	4.70	47	91
D4542947	4.75	47	91
D4542048	4.80	52	96
D4542948	4.85	52	96
D4542049	4.90	52	96
D4542949	4.95	52	96
D4542050	5.00	52	96
D4542950	5.05	52	96
D4542051	5.10	52	96
D4542951	5.15	52	96
D4542052	5.20	52	96
D4542952	5.25	52	96

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542053	5.30	52	96
D4542953	5.35	57	101
D4542054	5.40	57	101
D4542954	5.45	57	101
D4542055	5.50	57	101
D4542955	5.55	57	101
D4542056	5.60	57	101
D4542956	5.65	57	101
D4542057	5.70	57	101
D4542957	5.75	57	101
D4542058	5.80	57	101
D4542958	5.85	57	101
D4542059	5.90	57	101
D4542959	5.95	57	101
D4542060	6.00	57	101
D4542960	6.05	63	107
D4542061	6.10	63	107
D4542961	6.15	63	107
D4542062	6.20	63	107
D4542962	6.25	63	107
D4542063	6.30	63	107
D4542963	6.35	63	107

TiCN(D7542), TiAlN(DQ542) are available on your request.

▶ NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA

HSSCo8, HPD TWIST DRILLS for STEELS

JOBBER

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI



**KURZ
COURTE
CORTA**

►Application : Designed for high speed non-step 4D-5D drilling. Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.

►Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and jobbers length - increasing rigidity and suitable for 4D-5D drilling. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

►Anwendung : Zum Hochgeschwindigkeitsbohren 4D-5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.

►Vorteile : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

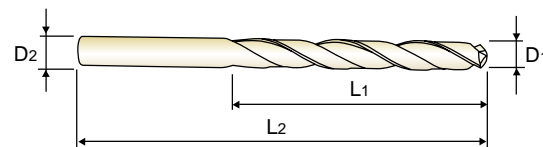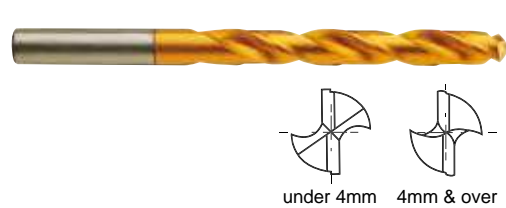

HSS Co8 30° h7 h6 h8 130° P.198-199

up to 13mm over 13mm

D1=D2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	Unit : mm			
				TiN	D1	L1	L2
D4542064	6.40	63	107	TiN	D1	L1	L2
D4542964	6.45	63	107	TiN	D1	L1	L2
D4542065	6.50	63	107	TiN	D1	L1	L2
D4542965	6.55	63	107	TiN	D1	L1	L2
D4542066	6.60	63	107	TiN	D1	L1	L2
D4542966	6.65	63	107	TiN	D1	L1	L2
D4542067	6.70	63	107	TiN	D1	L1	L2
D4542967	6.75	69	113	TiN	D1	L1	L2
D4542068	6.80	69	113	TiN	D1	L1	L2
D4542968	6.85	69	113	TiN	D1	L1	L2
D4542069	6.90	69	113	TiN	D1	L1	L2
D4542969	6.95	69	113	TiN	D1	L1	L2
D4542070	7.00	69	113	TiN	D1	L1	L2
D4542970	7.05	69	113	TiN	D1	L1	L2
D4542071	7.10	69	113	TiN	D1	L1	L2
D4542971	7.15	69	113	TiN	D1	L1	L2
D4542072	7.20	69	113	TiN	D1	L1	L2
D4542972	7.25	69	113	TiN	D1	L1	L2
D4542073	7.30	69	113	TiN	D1	L1	L2
D4542973	7.35	69	113	TiN	D1	L1	L2
D4542074	7.40	69	113	TiN	D1	L1	L2
D4542974	7.45	69	113	TiN	D1	L1	L2

► TiCN(D7542), TiAlN(DQ542) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, HPD TWIST DRILLS for STEELS

JOBBER

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI



**KURZ
COURTE
CORTA**

►Application : Designed for high speed non-step 4D-5D drilling. Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.

►Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and jobbers length - increasing rigidity and suitable for 4D-5D drilling. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

►Anwendung : Zum Hochgeschwindigkeitsbohren 4D-5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.

►Vorteile : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

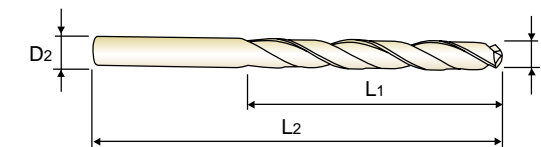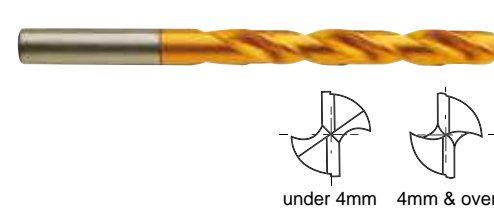

HSS Co8 30° h7 h6 h8 130° P.198-199

up to 13mm over 13mm

D1=D2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	Unit : mm			
				TiN	D1	L1	L2
D4542086	8.60	81	131	TiN	D1	L1	L2
D4542986	8.65	81	131	TiN	D1	L1	L2
D4542087	8.70	81	131	TiN	D1	L1	L2
D4542987	8.75	81	131	TiN	D1	L1	L2
D4542088	8.80	81	131	TiN	D1	L1	L2
D4542988	8.85	81	131	TiN	D1	L1	L2
D4542089	8.90	81	131	TiN	D1	L1	L2
D4542989	8.95	81	131	TiN	D1	L1	L2
D4542090	9.00	81	131	TiN	D1	L1	L2
D4542990	9.05	81	131	TiN	D1	L1	L2
D4542091	9.10	81	131	TiN	D1	L1	L2
D4542991	9.15	81	131	TiN	D1	L1	L2
D4542092	9.20	81	131	TiN	D1	L1	L2
D4542992	9.25	81	131	TiN	D1	L1	L2
D4542093	9.30	81	131	TiN	D1	L1	L2
D4542993	9.35	81	131	TiN	D1	L1	L2
D4542094	9.40	81	131	TiN	D1	L1	L2
D4542994	9.45	81	131	TiN	D1	L1	L2
D4542095	9.50	81	131	TiN	D1	L1	L2
D4542995	9.55	87	137	TiN	D1	L1	L2
D4542096	9.60	87	137	TiN	D1	L1	L2
D4542996	9.65	87	137	TiN	D1	L1	L2

► TiCN(D7542), TiAlN(DQ542) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, HPD TWIST DRILLS for STEELS

JOBBER

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI



**KURZ
COURTE
CORTA**

►Application : Designed for high speed non-step 4D-5D drilling. Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.

►Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and jobbers length - increasing rigidity and suitable for 4D-5D drilling. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

►Anwendung : Zum Hochgeschwindigkeitsbohren 4D-5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.

►Vorteile : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

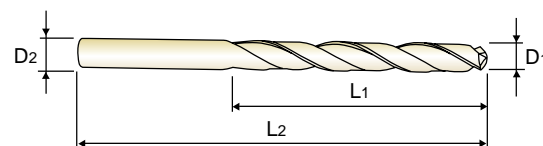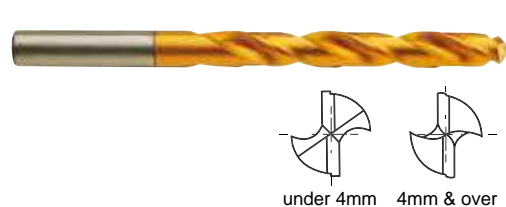

Icons for HSS Co8, 30°, h7, h6, h8, 130°, and P.198-199. Text: up to 13mm over 13mm. Unit: mm.

D1=D2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542108	10.80	94	151
D4542808	10.85	94	151
D4542109	10.90	94	151
D4542809	10.95	94	151
D4542110	11.00	94	151
D4542810	11.05	94	151
D4542111	11.10	94	151
D4542811	11.15	94	151
D4542112	11.20	94	151
D4542812	11.25	94	151
D4542113	11.30	94	151
D4542813	11.35	94	151
D4542114	11.40	94	151
D4542814	11.45	94	151
D4542115	11.50	94	151
D4542815	11.55	94	151
D4542116	11.60	94	151
D4542816	11.65	94	151
D4542117	11.70	94	151
D4542817	11.75	94	151
D4542118	11.80	94	151
D4542818	11.85	101	158

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542119	11.90	101	158
D4542819	11.95	101	158
D4542120	12.00	101	158
D4542121	12.10	101	158
D4542122	12.20	101	158
D4542123	12.30	101	158
D4542124	12.40	101	158
D4542125	12.50	101	158
D4542126	12.60	101	158
D4542127	12.70	101	158
D4542128	12.80	101	158
D4542129	12.90	101	158
D4542130	13.00	101	158
D4542135	13.50	90	150
D4542140	14.00	90	150
D4542141	14.10	95	155
D4542145	14.50	95	155
D4542150	15.00	95	161
D4542155	15.50	100	166
D4542156	15.60	100	166
D4542160	16.00	100	166
D4542165	16.50	106	172

► TICN(D7542), TiAIN(DQ542) are available on your request.

► NEXT PAGE

©: Excellent ○: Good

ISO Material Description	P									M						K				
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, HPD TWIST DRILLS for STEELS

JOBBER

- PREMIUM HSS KOBALT, HPD SPIRALBOHRER für STÄHLE
- Forets HPD HSSCo Premium pour Aciers, série courte
- PUNTE ELICOIDALI HPD IN PREMIUM HSS Co, PER ACCIAI



**KURZ
COURTE
CORTA**

►Application : Designed for high speed non-step 4D-5D drilling. Drilling mild steels, cast iron, aluminum, alloyed tool steels, etc.

►Advantage : Helical thinning - good chip removal, self-centering, reducing thrust and improving accuracy. Reinforced web and jobbers length - increasing rigidity and suitable for 4D-5D drilling. Premium Cobalt HSS with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

►Anwendung : Zum Hochgeschwindigkeitsbohren 4D-5D Bohrtiefe geeignet zum Bearbeiten von Stahl, Gusseisen, Aluminium, Legierungen, Werkzeugstahl, usw.

►Vorteile : Gute Spanabfuhr, selbstzentriert, geringere Abdrängung und verbesserte Genauigkeit, kurze Ausführung, verbesserte Stabilität, zum Bearbeiten von Premium kobalt HSS mit hochwertiger TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

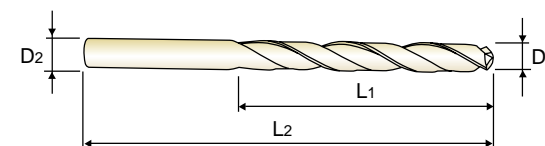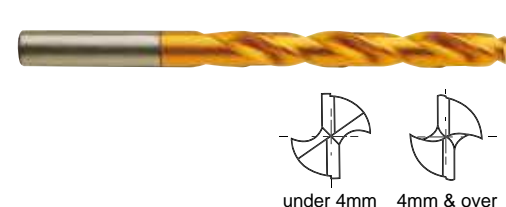

Icons for HSS Co8, 30°, h7, h6, h8, 130°, and P.198-199. Text: up to 13mm over 13mm. Unit: mm.

D1=D2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542170	17.00	106	172
D4542175	17.50	112	178
D4542176	17.60	112	178
D4542180	18.00	112	178
D4542185	18.50	118	184
D4542190	19.00	118	194
D4542195	19.50	125	201
D4542196	19.60	125	201
D4542200	20.00	125	201
D4542205	20.50	128	204
D4542210	21.00	128	204
D4542211	21.10	128	204
D4542215	21.50	132	208
D4542220	22.00	132	208
D4542225	22.50	136	212

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D4542230	23.00	136	212
D4542235	23.50	136	212
D4542240	24.00	140	220
D4542245	24.50	140	220
D4542250	25.00	140	220
D4542255	25.50	145	225
D4542260	26.00	145	225
D4542265	26.50	145	225
D4542270	27.00	150	230
D4542280	28.00	150	230
D4542290	29.00	155	235
D4542300	30.00	155	235
D4542310	31.00	160	240
D4542320	32.00	165	245

► TICN(D7542), TiAIN(DQ542) are available on your request.

©: Excellent ○: Good

ISO Material Description	P									M						K				
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA



DJ543 SERIES



HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS *STUB*

- HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
- Forets HPD-SUS HSS-E pour INOX, série extra-courte
- PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Designed for drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.
►Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling. Wide flute and stub length-increasing chip removal and reducing vibration and deflection. High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

►Anwendung : Geeignet zum Bearbeiten von rostfreier stähle, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierungen usw.
►Vorteile : Durch hohen Helix wird Spanstau vermieden, geeignet zum Hochleistungsbohren, durch die breiten Schneiden und die kurze Ausführung wird die Spanabfuhr erhöht und Vibrationen und Stoß reduziert. Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

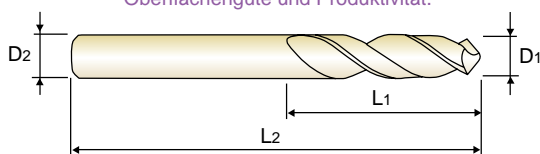

four facet

for STAINLESS STEELS
für rostfreier Stäle

Icons for HSS-E, 38°, h7, h8, 130°, 120°, and P.200-201. Text: up to 4mm over 4mm. Unit: mm. D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
DJ543020	2.00	12	44
DJ543021	2.10	12	44
DJ543022	2.20	13	45
DJ543023	2.30	13	45
DJ543024	2.40	14	46
DJ543025	2.50	14	46
DJ543026	2.60	14	46
DJ543027	2.70	16	48
DJ543028	2.80	16	48
DJ543029	2.90	16	48
DJ543030	3.00	16	48
DJ543031	3.10	18	50
DJ543032	3.20	18	50
DJ543033	3.30	18	50
DJ543034	3.40	20	52
DJ543035	3.50	20	52
DJ543036	3.60	20	52
DJ543037	3.70	20	52
DJ543038	3.80	22	54
DJ543039	3.90	22	54
DJ543040	4.00	22	54
DJ543041	4.10	22	66

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
DJ543042	4.20	22	66
DJ543043	4.30	24	68
DJ543044	4.40	24	68
DJ543045	4.50	24	68
DJ543046	4.60	24	68
DJ543047	4.70	24	68
DJ543048	4.80	26	70
DJ543049	4.90	26	70
DJ543050	5.00	26	70
DJ543051	5.10	26	70
DJ543052	5.20	26	70
DJ543053	5.30	26	70
DJ543054	5.40	28	72
DJ543055	5.50	28	72
DJ543056	5.60	28	72
DJ543057	5.70	28	72
DJ543058	5.80	28	72
DJ543059	5.90	28	72
DJ543060	6.00	28	72
DJ543061	6.10	31	75
DJ543062	6.20	31	75
DJ543063	6.30	31	75

► TiCN(DW543), TiAlN(DY543) are available on your request.

► NEXT PAGE

©: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○									◎	○	◎								

ISO	N					S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				○															



DJ543 SERIES



HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS *STUB*

- HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
- Forets HPD-SUS HSS-E pour INOX, série extra-courte
- PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Designed for drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.
►Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling. Wide flute and stub length-increasing chip removal and reducing vibration and deflection. High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life. High quality & good surface finish, high productivity.

►Anwendung : Geeignet zum Bearbeiten von rostfreier stähle, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierungen usw.
►Vorteile : Durch hohen Helix wird Spanstau vermieden, geeignet zum Hochleistungsbohren, durch die breiten Schneiden und die kurze Ausführung wird die Spanabfuhr erhöht und Vibrationen und Stoß reduziert. Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

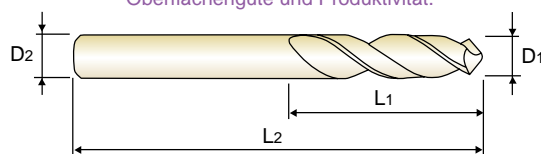

four facet

for STAINLESS STEELS
für rostfreier Stäle

Icons for HSS-E, 38°, h7, h8, 130°, 120°, and P.200-201. Text: up to 4mm over 4mm. Unit: mm. D1=D2

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
DJ543064	6.40	31	75
DJ543065	6.50	31	75
DJ543066	6.60	31	75
DJ543067	6.70	31	75
DJ543068	6.80	34	78
DJ543069	6.90	34	78
DJ543070	7.00	34	78
DJ543071	7.10	34	78
DJ543072	7.20	34	78
DJ543073	7.30	34	78
DJ543074	7.40	34	78
DJ543075	7.50	34	78
DJ543076	7.60	37	81
DJ543077	7.70	37	81
DJ543078	7.80	37	81
DJ543079	7.90	37	81
DJ543080	8.00	37	81
DJ543081	8.10	37	87
DJ543082	8.20	37	87
DJ543083	8.30	37	87
DJ543084	8.40	37	87
DJ543085	8.50	37	87

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
DJ543086	8.60	40	90
DJ543087	8.70	40	90
DJ543088	8.80	40	90
DJ543089	8.90	40	90
DJ543090	9.00	40	90
DJ543091	9.10	40	90
DJ543092	9.20	40	90
DJ543093	9.30	40	90
DJ543094	9.40	40	90
DJ543095	9.50	40	90
DJ543096	9.60	43	93
DJ543097	9.70	43	93
DJ543098	9.80	43	93
DJ543099	9.90	43	93
DJ543100	10.00	43	93
DJ543101	10.10	43	100
DJ543102	10.20	43	100
DJ543103	10.30	43	100
DJ543104	10.40	43	100
DJ543105	10.50	43	100
DJ543106	10.60	43	100
DJ543107	10.70	47	104

► TiCN(DW543), TiAlN(DY543) are available on your request.

► NEXT PAGE

©: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○									◎	○	◎								

ISO	N					S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				○															

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA

HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

STUB

- HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
- Forets HPD-SUS HSS-E pour INOX, série extra-courte
- PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX


**EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA**

Application : Designed for drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.

Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Wide flute and stub length-increasing chip removal and reducing vibration and deflection.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

Anwendung : Geeignet zum Bearbeiten von rostfreier stähle, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierungen usw.

Vorteile : Durch hohen Helix wird Spanstau vermieden, geeignet zum Hochleistungsbohren, durch die breiten Schneiden und die kurze Ausführung wird die Spanabfuhr erhöht und Vibrationen und Stoß reduziert. Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.

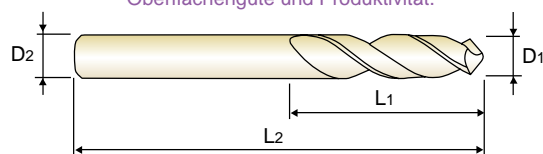

four facet

for STAINLESS STEELS für rostfreier Stäle

HSS-E 38° h7 h8 130° 120° P.200-201

D1=D2

EDP No.	Drill Diameter D1	Flute Length		Overall Length L2
		L1	L2	
TiN				
DJ543108	10.80	47	104	
DJ543109	10.90	47	104	
DJ543110	11.00	47	104	
DJ543111	11.10	47	104	
DJ543112	11.20	47	104	
DJ543113	11.30	47	104	
DJ543114	11.40	47	104	
DJ543115	11.50	47	104	
DJ543116	11.60	47	104	
DJ543117	11.70	47	104	
DJ543118	11.80	47	104	
DJ543119	11.90	51	108	

EDP No.	Drill Diameter D1	Flute Length		Overall Length L2
		L1	L2	
TiN				
DJ543120	12.00	51	108	
DJ543121	12.10	51	108	
DJ543122	12.20	51	108	
DJ543123	12.30	51	108	
DJ543124	12.40	51	108	
DJ543125	12.50	51	108	
DJ543126	12.60	51	108	
DJ543127	12.70	51	108	
DJ543128	12.80	51	108	
DJ543129	12.90	51	108	
DJ543130	13.00	51	108	

TiCN(DW543), TiAlN(DY543) are available on your request.

HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

JOBBER

- HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
- Forets HPD-SUS HSS-E pour INOX, série courte
- PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX



**KURZ
COURTE
CORTA**

Application : Designed for 4D-5D drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.

Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Reinforced web and jobbers length-increasing rigidity and suitable for 4D-5D drilling.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

Anwendung : Für 4D-5D Bohrtiefe, geeignet für rostfreier stähle, Stahl, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierung usw.

Vorteile : Helixwinkel, durch scharfe Hauptschneide wird Spanstau vermieden, geeignet zum Hochleistungsbohren, verstärkte Kerndicke, kurze Ausführung, Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Stabilität, Oberflächengüte und Produktivität.

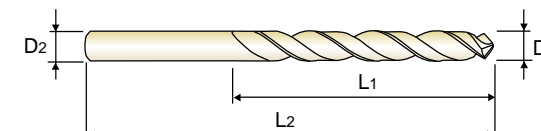

up to 13mm over 13mm

for STAINLESS STEELS für rostfreier Stäle

HSS-E 38° h7 h8 130° 120° P.200-201

D1=D2

EDP No.	Drill Diameter D1	Flute Length		Overall Length L2
		L1	L2	
TiN				
DJ544020	2.00	24	56	
DJ544021	2.10	24	56	
DJ544022	2.20	27	59	
DJ544023	2.30	27	59	
DJ544024	2.40	30	62	
DJ544025	2.50	30	62	
DJ544026	2.60	30	62	
DJ544027	2.70	33	65	
DJ544028	2.80	33	65	
DJ544029	2.90	33	65	
DJ544030	3.00	33	65	
DJ544031	3.10	36	68	
DJ544032	3.20	36	68	
DJ544033	3.30	36	68	
DJ544034	3.40	39	71	
DJ544035	3.50	39	71	
DJ544036	3.60	39	71	
DJ544037	3.70	39	71	
DJ544038	3.80	43	75	
DJ544039	3.90	43	75	
DJ544040	4.00	43	75	
DJ544041	4.10	43	87	

EDP No.	Drill Diameter D1	Flute Length		Overall Length L2
		L1	L2	
TiN				
DJ544042	4.20	43	87	
DJ544043	4.30	47	91	
DJ544044	4.40	47	91	
DJ544045	4.50	47	91	
DJ544046	4.60	47	91	
DJ544047	4.70	47	91	
DJ544048	4.80	52	96	
DJ544049	4.90	52	96	
DJ544050	5.00	52	96	
DJ544051	5.10	52	96	
DJ544052	5.20	52	96	
DJ544053	5.30	52	96	
DJ544054	5.40	57	101	
DJ544055	5.50	57	101	
DJ544056	5.60	57	101	
DJ544057	5.70	57	101	
DJ544058	5.80	57	101	
DJ544059	5.90	57	101	
DJ544060	6.00	57	101	
DJ544061	6.10	63	107	
DJ544062	6.20	63	107	
DJ544063	6.30	63	107	

TiCN(DW544), TiAlN(DY544) are available on your request.

NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	15	30	25	38
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	180	260	160	250
Recommended	○									◎	○	◎												

◎ : Excellent ○ : Good

ISO	P										M				K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	15	30	25	38
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	180	260	160	250
Recommended	○									◎	○	◎												

HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

JOBBER

- HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
- Forets HPD-SUS HSS-E pour INOX, série courte
- PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX


**KURZ
COURTE
CORTA**

► **Application** : Designed for 4D-5D drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.


► **Advantage** : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Reinforced web and jobbers length-increasing rigidity and suitable for 4D-5D drilling.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

► **Anwendung** : Für 4D-5D Bohrtiefe, geeignet für rostfreier stähle, Stahl, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierung usw.

► **Vorteile** : Helixwinkel, durch scharfe Hauptschneide wird Spanstau vermieden, geeignet zum Hochleistungsbohren, verstärkte Kerndicke, kurze Ausführung, Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Stabilität, Oberflächengüte und Produktivität.



up to 13mm over 13mm

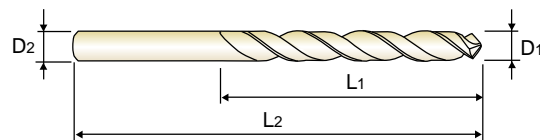

for STAINLESS STEELS
für rostfreier Stäle

HSS-E
38°
h7
h8
130°
120°
P.200-201

D₁=D₂

EDP No.	Drill Diameter	Flute Length	Overall Length	
			L ₁	L ₂
TiN	D ₁	L ₁		
DJ544064	6.40	63	107	
DJ544065	6.50	63	107	
DJ544066	6.60	63	107	
DJ544067	6.70	63	107	
DJ544068	6.80	69	113	
DJ544069	6.90	69	113	
DJ544070	7.00	69	113	
DJ544071	7.10	69	113	
DJ544072	7.20	69	113	
DJ544073	7.30	69	113	
DJ544074	7.40	69	113	
DJ544075	7.50	69	113	
DJ544076	7.60	75	119	
DJ544077	7.70	75	119	
DJ544078	7.80	75	119	
DJ544079	7.90	75	119	
DJ544080	8.00	75	119	
DJ544081	8.10	75	125	
DJ544082	8.20	75	125	
DJ544083	8.30	75	125	
DJ544084	8.40	75	125	
DJ544085	8.50	75	125	

► TiCN(DW544), TiAlN(DY544) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

JOBBER

- HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
- Forets HPD-SUS HSS-E pour INOX, série courte
- PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX


**KURZ
COURTE
CORTA**

► **Application** : Designed for 4D-5D drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.


► **Advantage** : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Reinforced web and jobbers length-increasing rigidity and suitable for 4D-5D drilling.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

► **Anwendung** : Für 4D-5D Bohrtiefe, geeignet für rostfreier stähle, Stahl, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierung usw.

► **Vorteile** : Helixwinkel, durch scharfe Hauptschneide wird Spanstau vermieden, geeignet zum Hochleistungsbohren, verstärkte Kerndicke, kurze Ausführung, Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Stabilität, Oberflächengüte und Produktivität.



up to 13mm over 13mm

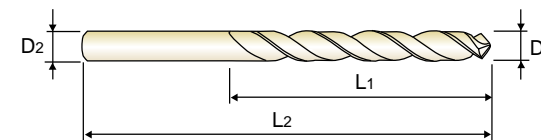

for STAINLESS STEELS
für rostfreier Stäle

HSS-E
38°
h7
h8
130°
120°
P.200-201

D₁=D₂

EDP No.	Drill Diameter	Flute Length	Overall Length	
			L ₁	L ₂
TiN	D ₁	L ₁		
DJ544108	10.80	94	151	
DJ544109	10.90	94	151	
DJ544110	11.00	94	151	
DJ544111	11.10	94	151	
DJ544112	11.20	94	151	
DJ544113	11.30	94	151	
DJ544114	11.40	94	151	
DJ544115	11.50	94	151	
DJ544116	11.60	94	151	
DJ544117	11.70	94	151	
DJ544118	11.80	94	151	
DJ544119	11.90	101	158	
DJ544120	12.00	101	158	
DJ544121	12.10	101	158	
DJ544122	12.20	101	158	
DJ544123	12.30	101	158	
DJ544124	12.40	101	158	
DJ544125	12.50	101	158	
DJ544126	12.60	101	158	
DJ544127	12.70	101	158	
DJ544128	12.80	101	158	

► TiCN(DW544), TiAlN(DY544) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

D4541, D4542 SERIES HPD DRILLS for STEELS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)													
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0						
P	1	Non-alloy steel	35	RPM	5570	3710	2790	2230	1860	1390	1110	930						
				FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32						
				25	RPM	3980	2650	1990	1590	1330	990	800	660					
					FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32					
					RPM	3980	2650	1990	1590	1330	990	800	660					
	FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32									
	25	Low alloy steel	30	RPM	4770	3180	2390	1910	1590	1190	950	800						
				FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32						
				25	RPM	3980	2650	1990	1590	1330	990	800	660					
					FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32					
				15	High alloyed steel, and tool steel	RPM	2390	1590	1190	950	800	600	480	400				
FEED						0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32					
M	12	Stainless steel	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060						
				FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38						
				K	Grey cast iron	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060			
FEED	0.06-0.12	0.09-0.15	0.12-0.18				0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38							
17	Nodular cast iron	40	RPM				6370	4240	3180	2550	2120	1590	1270	1060				
			FEED				0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38				
			18	Malleable cast iron	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060				
FEED	0.06-0.12	0.09-0.15				0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38							
N	21	Aluminum-wrought alloy	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060						
				FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38						
				23	Aluminum-cast, alloyed	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060			
							FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38			
							26	Copper and Copper Alloys (Bronze / Brass)	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060
										FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38
										29	Non Metallic Materials	40	RPM	6370	4240	3180	2550	2120
							FEED	0.06-0.12	0.09-0.15				0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38
							S	Heat Resistant Super Alloys	40				RPM	6370	4240	3180	2550	2120
										FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38
36	Titanium Alloys	40	RPM							6370	4240	3180	2550	2120	1590	1270	1060	
			FEED	0.06-0.12	0.09-0.15	0.12-0.18				0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38				
			H	Hardened steel	40	RPM				6370	4240	3180	2550	2120	1590	1270	1060	
FEED	0.06-0.12	0.09-0.15				0.12-0.18				0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38				
40	Chilled Cast Iron	40				RPM				6370	4240	3180	2550	2120	1590	1270	1060	
						FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38				
41	Hardened Cast Iron	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060							
			FEED	0.06-0.12	0.09-0.15	0.12-0.18	0.15-0.21	0.16-0.22	0.22-0.28	0.26-0.36	0.28-0.38							

Please decrease the feed rate (15~20%) in D4542 SERIES HPD drills.
Den Vorschub in der D4542 Gruppe HPD Bohrer bitte verringern.

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm)									
		14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0
1	RPM	800	700	620	560	510	460	430	400	370	350
	FEED	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45	0.40-0.50	0.44-0.54	0.48-0.58	0.52-0.62	0.56-0.66	0.60-0.70
2	RPM	570	500	440	400	360	330	310	280	270	250
	FEED	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45	0.40-0.50	0.44-0.54	0.48-0.58	0.52-0.62	0.56-0.66	0.60-0.70
3	RPM	570	500	440	400	360	330	310	280	270	250
	FEED	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45	0.40-0.50	0.44-0.54	0.48-0.58	0.52-0.62	0.56-0.66	0.60-0.70
6	RPM	680	600	530	480	430	400	370	340	320	300
	FEED	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45	0.40-0.50	0.44-0.54	0.48-0.58	0.52-0.62	0.56-0.66	0.60-0.70
7	RPM	570	500	440	400	360	330	310	280	270	250
	FEED	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45	0.40-0.50	0.44-0.54	0.48-0.58	0.52-0.62	0.56-0.66	0.60-0.70
10	RPM	340	300	270	240	220	200	180	170	160	150
	FEED	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45	0.40-0.50	0.44-0.54	0.48-0.58	0.52-0.62	0.56-0.66	0.60-0.70
15	RPM	910	800	710	640	580	530	490	450	420	400
	FEED	0.32-0.42	0.35-0.45	0.42-0.52	0.44-0.54	0.50-0.60	0.54-0.64	0.59-0.69	0.64-0.74	0.69-0.79	0.74-0.84

Please decrease the feed rate (15~20%) in D4542 SERIES HPD drills.
Den Vorschub in der D4542 Gruppe HPD Bohrer bitte verringern.

DJ543, DJ544 SERIES HPD-SUS DRILLS for STAINLESS STEELS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)				
					2.0	3.0	4.0	5.0	6.0
P	1	Non-alloy steel	35	RPM	5570	3710	2790	2230	1860
	2			FEED	0.04-0.1	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19
	3								
	4								
	5								
	6	Low alloy steel							
	7								
	8								
	9								
	10								
	11	High alloyed steel, and tool steel							
M	12	Stainless steel	20	RPM	3180	2120	1590	1270	1060
	13		FEED	0.03-0.07	0.05-0.09	0.06-0.12	0.09-0.15	0.12-0.18	
	14		RPM	2860	1910	1430	1150	950	
K	15	Grey cast iron	15	RPM	2390	1590	1190	950	800
	16		FEED	0.02-0.05	0.03-0.07	0.04-0.10	0.06-0.12	0.07-0.13	
	17	Nodular cast iron							
	18								
	19								
	20	Malleable cast iron							
	N	21	Aluminum-wrought alloy	90	RPM	14320	9550	7160	5730
22		FEED		0.05-0.12	0.10-0.18	0.12-0.22	0.15-0.25	0.17-0.27	
23		Aluminum-cast, alloyed	90	RPM	14320	9550	7160	5730	4770
24			FEED	0.05-0.12	0.10-0.18	0.12-0.22	0.15-0.25	0.17-0.27	
25									
26		Copper and Copper Alloys (Bronze / Brass)	35	RPM	5570	3710	2790	2230	1860
27			FEED	0.03-0.06	0.05-0.09	0.05-0.11	0.08-0.14	0.11-0.17	
28									
29		Non Metallic Materials							
30									
S	31	Heat Resistant Super Alloys							
	32								
	33								
	34								
	35	Titanium Alloys							
	36								
	37								
H	38	Hardened steel		Please decrease the feed rate (15~20%) in DJ544 SERIES HPD-SUS drills. Den Vorschub in der DJ544 Gruppe HPD-SUS Bohrer bitte verringern					
	39								
	40		Chilled Cast Iron						
	41		Hardened Cast Iron						

VDI 3323	Parameter	Drill Diameter (mm)						
		8.0	10.0	12.0	14.0	16.0	18.0	20.0
1	RPM	1390	1110	930	800	700	620	560
1	FEED	0.18-0.24	0.20-0.30	0.22-0.32	0.25-0.35	0.28-0.38	0.34-0.44	0.35-0.45
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12	RPM	800	640	530	450	400	350	320
12	FEED	0.18-0.24	0.20-0.30	0.26-0.36	0.34-0.44	0.38-0.48	0.40-0.50	0.43-0.53
13	RPM	720	570	480	410	360	320	290
13	FEED	0.18-0.24	0.20-0.30	0.26-0.36	0.34-0.44	0.38-0.48	0.40-0.50	0.43-0.53
14	RPM	600	480	400	340	300	270	240
14	FEED	0.10-0.160	0.12-0.22	0.14-0.24	0.24-0.34	0.28-0.38	0.30-0.40	0.33-0.43
15								
16								
17								
18								
19								
20								
21	RPM	3580	2860	2390	2050	1790	1590	1430
21	FEED	0.25-0.35	0.35-0.45	0.40-0.55	0.45-0.60	0.55-0.70	0.60-0.75	0.65-0.80
22	RPM	3580	2860	2390	2050	1790	1590	1430
22	FEED	0.25-0.35	0.35-0.45	0.40-0.55	0.45-0.60	0.55-0.70	0.60-0.75	0.65-0.80
23								
24								
25								
26	RPM	1390	1110	930	800	700	620	560
26	FEED	0.14-0.20	0.16-0.26	0.18-0.28	0.22-0.32	0.26-0.36	0.28-0.38	0.30-0.40
27								
28								
29								
30								
31								
32								
33								
34								
35								
36								
37								
38		Please decrease the feed rate (15~20%) in DJ544 SERIES HPD-SUS drills. Den Vorschub in der DJ544 Gruppe HPD-SUS Bohrer bitte verringern						
39								
40								
41								



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING



HSS & HSS-E

GOLD-P DRILLS

GOLD-P BOHRER

- Same Performance as Full TiN-coated Drills
- Gleiche Leistung, wie bei voll TiN-beschichteten Bohrern

SELECTION GUIDE



SERIES	D1GP125	D1GP165
STANDARD	DIN338	DIN338
LENGTH	JOBBER	JOBBER
SIZE MIN	D1.0	D1.6
SIZE MAX	D13.0	D13.0
PAGE	206	209

SURFACE TREATMENT

TiN

HSS & HSS-E GOLD-P DRILLS

Same Performance as Full TiN-coated Drills



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.219

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	13
	2		About 0.45% C Annealed	190	25
	3		About 0.45% C Quenched & Tempered	250	28
	4		About 0.75% C Annealed	270	32
	5		About 0.75% C Quenched & Tempered	300	10
	6	Low alloy steel	Annealed	180	29
	7		Quenched & Tempered	275	32
	8		Quenched & Tempered	300	38
	9		Quenched & Tempered	350	15
	10	High alloyed steel, and tool steel	Annealed	200	35
	11		Quenched & Tempered	325	15
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	23
	13		Martensitic Quenched & Tempered	240	10
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	26
	16		Pearlitic (Martensitic)	260	3
	17	Nodular cast iron	Ferritic	160	25
	18		Pearlitic	250	21
	19	Malleable cast iron	Ferritic	130	60
20	Pearlitic		230	100	
N	21	Aluminum-wrought alloy	Not Curable	60	75
	22		Curable Hardened	100	90
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	130
	24		≤ 12% Si, Curable Hardened	90	110
	25		> 12% Si, Not Curable	130	90
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	100
	27		CuZn, CuSnZn (Brass)	90	100
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100	○
	29		Duroplastic, Fiber Reinforced Plastic	○	○
	30	Rubber, Wood, etc.	○	○	
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34		Ni or Co Based Cured	350	38
	35		Cast	320	34
	36	Titanium Alloys	Pure Titanium	400 Rm	○
	37		Alpha + Beta Alloys Hardened	1050 Rm	○
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41		Hardened	550	55

SERIES	DLGP195	DLGP506
STANDARD	DIN338	DIN338
LENGTH	JOBBER	JOBBER
SIZE MIN	D1.0	D2.0
SIZE MAX	D13.0	D13.0
PAGE	212	215

TiN



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	13
	2		About 0.45% C Annealed	190	25
	3		About 0.45% C Quenched & Tempered	250	28
	4		About 0.75% C Annealed	270	32
	5		About 0.75% C Quenched & Tempered	300	10
	6	Low alloy steel	Annealed	180	29
	7		Quenched & Tempered	275	32
	8		Quenched & Tempered	300	38
	9		Quenched & Tempered	350	15
	10	High alloyed steel, and tool steel	Annealed	200	35
	11		Quenched & Tempered	325	15
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	23
	13		Martensitic Quenched & Tempered	240	10
	14	Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	26
	16		Pearlitic (Martensitic)	260	3
	17	Nodular cast iron	Ferritic	160	25
	18		Pearlitic	250	21
	19	Malleable cast iron	Ferritic	130	60
20	Pearlitic		230	100	
N	21	Aluminum-wrought alloy	Not Curable	60	75
	22		Curable Hardened	100	90
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	130
	24		≤ 12% Si, Curable Hardened	90	110
	25		> 12% Si, Not Curable	130	90
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	100
	27		CuZn, CuSnZn (Brass)	90	100
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100	○
	29		Duroplastic, Fiber Reinforced Plastic	○	○
	30	Rubber, Wood, etc.	○	○	
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34		Ni or Co Based Cured	350	38
	35		Cast	320	34
	36	Titanium Alloys	Pure Titanium	400 Rm	○
	37		Alpha + Beta Alloys Hardened	1050 Rm	○
H	38	Hardened steel	Hardened	550	55
	39		Hardened	630	60
	40	Chilled Cast Iron	Cast	400	42
	41		Hardened	550	55

GOLD-P DRILL SETS

SET1	SET2	SET3	SET4
19pcs	25pcs	24pcs	91pcs
1.0mm ~ 10.0mm × 0.5mm step	1.0mm ~ 13.0mm × 0.5mm step	1.0mm ~ 10.5mm × 0.5mm step +3.3 +4.2 +6.8 +10.2	1.0mm ~ 10.0mm × 0.1mm step



D1GP125 SERIES

HSS, STRAIGHT SHANK DRILLS, GOLD-P COATED


JOBBER

- HSS SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS queue cylindrique revêtus, série courte
- PUNTE IN HSS, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 118°, Normal point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron

- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 118° Normalanschliff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

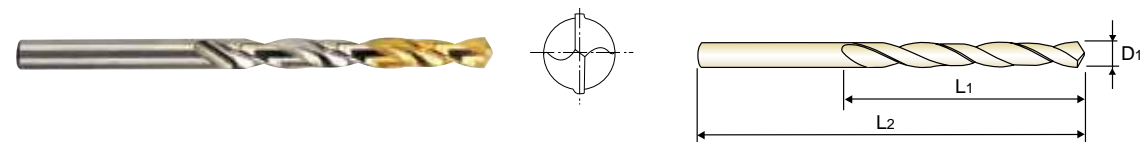

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1GP125011	1.1	14	36	D1GP125037	3.7	39	70
D1GP125012	1.2	16	38	D1GP125038	3.8	43	75
D1GP125013	1.3	16	38	D1GP125039	3.9	43	75
D1GP125014	1.4	18	40	D1GP125040	4.0	43	75
D1GP125015	1.5	18	40	D1GP125041	4.1	43	75
D1GP125016	1.6	20	43	D1GP125042	4.2	43	75
D1GP125017	1.7	20	43	D1GP125043	4.3	47	80
D1GP125018	1.8	22	46	D1GP125044	4.4	47	80
D1GP125019	1.9	22	46	D1GP125045	4.5	47	80
D1GP125020	2.0	24	49	D1GP125046	4.6	47	80
D1GP125021	2.1	24	49	D1GP125047	4.7	47	80
D1GP125022	2.2	27	53	D1GP125048	4.8	52	86
D1GP125023	2.3	27	53	D1GP125049	4.9	52	86
D1GP125024	2.4	30	57	D1GP125050	5.0	52	86
D1GP125025	2.5	30	57	D1GP125051	5.1	52	86
D1GP125026	2.6	30	57	D1GP125052	5.2	52	86
D1GP125027	2.7	33	61	D1GP125053	5.3	52	86
D1GP125028	2.8	33	61	D1GP125054	5.4	57	93
D1GP125029	2.9	33	61	D1GP125055	5.5	57	93
D1GP125030	3.0	33	61	D1GP125056	5.6	57	93
D1GP125031	3.1	36	65	D1GP125057	5.7	57	93
D1GP125032	3.2	36	65	D1GP125058	5.8	57	93
D1GP125033	3.3	36	65	D1GP125059	5.9	57	93
D1GP125034	3.4	39	70	D1GP125060	6.0	57	93
D1GP125035	3.5	39	70	D1GP125061	6.1	63	101

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○						○							○					



D1GP125 SERIES

HSS, STRAIGHT SHANK DRILLS, GOLD-P COATED


JOBBER

- HSS SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS queue cylindrique revêtus, série courte
- PUNTE IN HSS, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 118°, Normal point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron

- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 118° Normalanschliff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

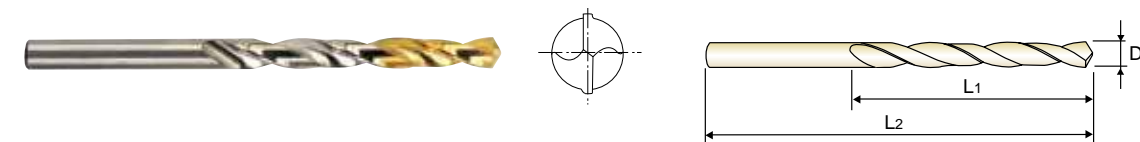

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1GP125063	6.3	63	101	D1GP125089	8.9	81	125
D1GP125064	6.4	63	101	D1GP125090	9.0	81	125
D1GP125065	6.5	63	101	D1GP125091	9.1	81	125
D1GP125066	6.6	63	101	D1GP125092	9.2	81	125
D1GP125067	6.7	63	101	D1GP125093	9.3	81	125
D1GP125068	6.8	69	109	D1GP125094	9.4	81	125
D1GP125069	6.9	69	109	D1GP125095	9.5	81	125
D1GP125070	7.0	69	109	D1GP125096	9.6	87	133
D1GP125071	7.1	69	109	D1GP125097	9.7	87	133
D1GP125072	7.2	69	109	D1GP125098	9.8	87	133
D1GP125073	7.3	69	109	D1GP125099	9.9	87	133
D1GP125074	7.4	69	109	D1GP125100	10.0	87	133
D1GP125075	7.5	69	109	D1GP125101	10.1	87	133
D1GP125076	7.6	75	117	D1GP125102	10.2	87	133
D1GP125077	7.7	75	117	D1GP125103	10.3	87	133
D1GP125078	7.8	75	117	D1GP125104	10.4	87	133
D1GP125079	7.9	75	117	D1GP125105	10.5	87	133
D1GP125080	8.0	75	117	D1GP125106	10.6	87	133
D1GP125081	8.1	75	117	D1GP125107	10.7	94	142
D1GP125082	8.2	75	117	D1GP125108	10.8	94	142
D1GP125083	8.3	75	117	D1GP125109	10.9	94	142
D1GP125084	8.4	75	117	D1GP125110	11.0	94	142
D1GP125085	8.5	75	117	D1GP125111	11.1	94	142
D1GP125086	8.6	81	125	D1GP125112	11.2	94	142
D1GP125087	8.7	81	125	D1GP125113	11.3	94	142

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○						○							○					


HSS, STRAIGHT SHANK DRILLS, GOLD-P COATED

JOBBER

- HSS SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS queue cylindrique revêtus, série courte
- PUNTE IN HSS, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 118°, Normal point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron
- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 118° Normalanschiff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

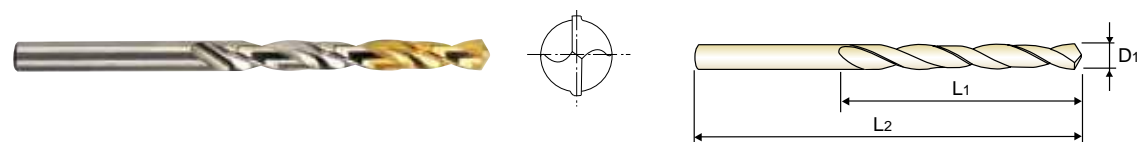

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1GP125114	11.4	94	142	D1GP125123	12.3	101	151
D1GP125115	11.5	94	142	D1GP125124	12.4	101	151
D1GP125116	11.6	94	142	D1GP125125	12.5	101	151
D1GP125117	11.7	94	142	D1GP125126	12.6	101	151
D1GP125118	11.8	94	142	D1GP125127	12.7	101	151
D1GP125119	11.9	101	151	D1GP125128	12.8	101	151
D1GP125120	12.0	101	151	D1GP125129	12.9	101	151
D1GP125121	12.1	101	151	D1GP125130	13.0	101	151
D1GP125122	12.2	101	151				

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○						○							○					


HSS, STRAIGHT SHANK DRILLS, GOLD-P COATED

JOBBER

- HSS SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS queue cylindrique revêtus, série courte
- PUNTE IN HSS, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 118°, Split point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron
- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 118° Kreuzanschiff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

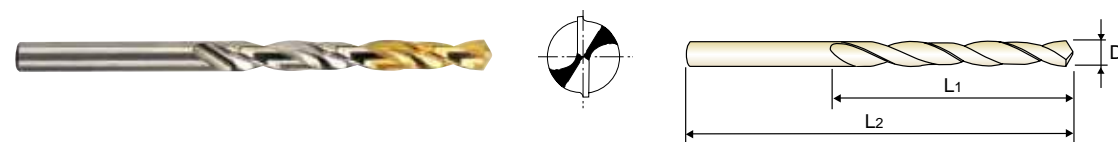

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1GP165016	1.6	20	43	D1GP165042	4.2	43	75
D1GP165017	1.7	20	43	D1GP165043	4.3	47	80
D1GP165018	1.8	22	46	D1GP165044	4.4	47	80
D1GP165019	1.9	22	46	D1GP165045	4.5	47	80
D1GP165020	2.0	24	49	D1GP165046	4.6	47	80
D1GP165021	2.1	24	49	D1GP165047	4.7	47	80
D1GP165022	2.2	27	53	D1GP165048	4.8	52	86
D1GP165023	2.3	27	53	D1GP165049	4.9	52	86
D1GP165024	2.4	30	57	D1GP165050	5.0	52	86
D1GP165025	2.5	30	57	D1GP165051	5.1	52	86
D1GP165026	2.6	30	57	D1GP165052	5.2	52	86
D1GP165027	2.7	33	61	D1GP165053	5.3	52	86
D1GP165028	2.8	33	61	D1GP165054	5.4	57	93
D1GP165029	2.9	33	61	D1GP165055	5.5	57	93
D1GP165030	3.0	33	61	D1GP165056	5.6	57	93
D1GP165031	3.1	36	65	D1GP165057	5.7	57	93
D1GP165032	3.2	36	65	D1GP165058	5.8	57	93
D1GP165033	3.3	36	65	D1GP165059	5.9	57	93
D1GP165034	3.4	39	70	D1GP165060	6.0	57	93
D1GP165035	3.5	39	70	D1GP165061	6.1	63	101
D1GP165036	3.6	39	70	D1GP165062	6.2	63	101
D1GP165037	3.7	39	70	D1GP165063	6.3	63	101
D1GP165038	3.8	43	75	D1GP165064	6.4	63	101
D1GP165039	3.9	43	75	D1GP165065	6.5	63	101
D1GP165040	4.0	43	75	D1GP165066	6.6	63	101
D1GP165041	4.1	43	75	D1GP165067	6.7	63	101

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○						○							○					


HSS, STRAIGHT SHANK DRILLS, GOLD-P COATED

JOBBER

- HSS SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS queue cylindrique revêtus, série courte
- PUNTE IN HSS, GAMBO CILINDRICO, GOLD-P

**KURZ
COURTE
CORTA**

- Flute Geometry** : Right hand helix
- Point Angle** : 118°, Split point
- Surface treatment** : Bright body, TiN coating on working area
- Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron
- Nutenform** : Rechtsspirale
- Spitzenwinkel** : 118° Kreuzanschliff
- Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

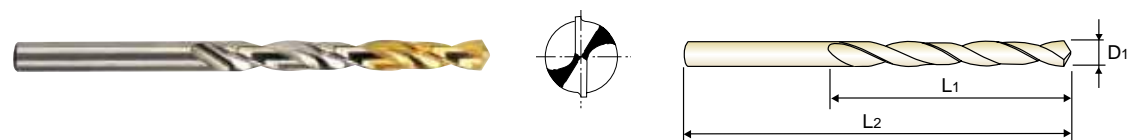

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1GP165069	6.9	69	109	D1GP165095	9.5	81	125
D1GP165070	7.0	69	109	D1GP165096	9.6	87	133
D1GP165071	7.1	69	109	D1GP165097	9.7	87	133
D1GP165072	7.2	69	109	D1GP165098	9.8	87	133
D1GP165073	7.3	69	109	D1GP165099	9.9	87	133
D1GP165074	7.4	69	109	D1GP165100	10.0	87	133
D1GP165075	7.5	69	109	D1GP165101	10.1	87	133
D1GP165076	7.6	75	117	D1GP165102	10.2	87	133
D1GP165077	7.7	75	117	D1GP165103	10.3	87	133
D1GP165078	7.8	75	117	D1GP165104	10.4	87	133
D1GP165079	7.9	75	117	D1GP165105	10.5	87	133
D1GP165080	8.0	75	117	D1GP165106	10.6	87	133
D1GP165081	8.1	75	117	D1GP165107	10.7	94	142
D1GP165082	8.2	75	117	D1GP165108	10.8	94	142
D1GP165083	8.3	75	117	D1GP165109	10.9	94	142
D1GP165084	8.4	75	117	D1GP165110	11.0	94	142
D1GP165085	8.5	75	117	D1GP165111	11.1	94	142
D1GP165086	8.6	81	125	D1GP165112	11.2	94	142
D1GP165087	8.7	81	125	D1GP165113	11.3	94	142
D1GP165088	8.8	81	125	D1GP165114	11.4	94	142
D1GP165089	8.9	81	125	D1GP165115	11.5	94	142
D1GP165090	9.0	81	125	D1GP165116	11.6	94	142
D1GP165091	9.1	81	125	D1GP165117	11.7	94	142
D1GP165092	9.2	81	125	D1GP165118	11.8	94	142
D1GP165093	9.3	81	125	D1GP165119	11.9	101	151

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc						15	30	25	38	34						55	60	42	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○						○							○					


HSS, STRAIGHT SHANK DRILLS, GOLD-P COATED

JOBBER

- HSS SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS queue cylindrique revêtus, série courte
- PUNTE IN HSS, GAMBO CILINDRICO, GOLD-P

**KURZ
COURTE
CORTA**

- Flute Geometry** : Right hand helix
- Point Angle** : 118°, Split point
- Surface treatment** : Bright body, TiN coating on working area
- Application** : Drilling steels, Cast steels alloyed and Non-alloyed, Grey cast iron, Graphite, Malleable cast iron
- Nutenform** : Rechtsspirale
- Spitzenwinkel** : 118° Kreuzanschliff
- Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- Anwendung** : Stahl, legierter und unlegierter Stahlguss, Grauguss, Graphit, Temperguss

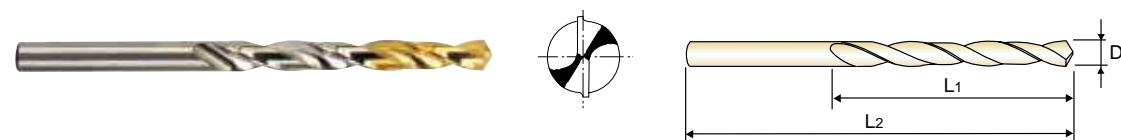

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1GP165121	12.1	101	151	D1GP165127	12.7	101	151
D1GP165122	12.2	101	151	D1GP165128	12.8	101	151
D1GP165123	12.3	101	151	D1GP165129	12.9	101	151
D1GP165124	12.4	101	151	D1GP165130	13.0	101	151
D1GP165125	12.5	101	151				



DLGP195 SERIES

HSS-E, STRAIGHT SHANK DRILLS, GOLD-P COATED



JOBBER

- HSS-E SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS-E queue cylindrique revêtus, série courte
- PUNTE IN HSS-E, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 135°, under 1.6mm : Normal point
1.6mm & over : Split point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling stainless steels, difficult to cut materials such as titanium alloys and inconel.

- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 135°, unter 1.6mm : Normalanschliff
1.6mm & über : Kreuzanschliff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Tiefe Bohrungen in unlegierten und legierten Stählen, Grauguss, Temperguss, Aluminium- und Magnesiumlegierungen

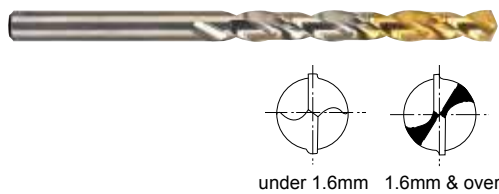

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
DLGP195010	1.0	12	34	DLGP195036	3.6	39	70		
DLGP195011	1.1	14	36	DLGP195037	3.7	39	70		
DLGP195012	1.2	16	38	DLGP195038	3.8	43	75		
DLGP195013	1.3	16	38	DLGP195039	3.9	43	75		
DLGP195014	1.4	18	40	DLGP195040	4.0	43	75		
DLGP195015	1.5	18	40	DLGP195041	4.1	43	75		
DLGP195016	1.6	20	43	DLGP195042	4.2	43	75		
DLGP195017	1.7	20	43	DLGP195043	4.3	47	80		
DLGP195018	1.8	22	46	DLGP195044	4.4	47	80		
DLGP195019	1.9	22	46	DLGP195045	4.5	47	80		
DLGP195020	2.0	24	49	DLGP195046	4.6	47	80		
DLGP195021	2.1	24	49	DLGP195047	4.7	47	80		
DLGP195022	2.2	27	53	DLGP195048	4.8	52	86		
DLGP195023	2.3	27	53	DLGP195049	4.9	52	86		
DLGP195024	2.4	30	57	DLGP195050	5.0	52	86		
DLGP195025	2.5	30	57	DLGP195051	5.1	52	86		
DLGP195026	2.6	30	57	DLGP195052	5.2	52	86		
DLGP195027	2.7	33	61	DLGP195053	5.3	52	86		
DLGP195028	2.8	33	61	DLGP195054	5.4	57	93		
DLGP195029	2.9	33	61	DLGP195055	5.5	57	93		
DLGP195030	3.0	33	61	DLGP195056	5.6	57	93		
DLGP195031	3.1	36	65	DLGP195057	5.7	57	93		
DLGP195032	3.2	36	65	DLGP195058	5.8	57	93		
DLGP195033	3.3	36	65	DLGP195059	5.9	57	93		
DLGP195034	3.4	39	70	DLGP195060	6.0	57	93		
DLGP195035	3.5	39	70	DLGP195061	6.1	63	101		

► NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○			○					○					○		○			



DLGP195 SERIES

HSS-E, STRAIGHT SHANK DRILLS, GOLD-P COATED



JOBBER

- HSS-E SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS-E queue cylindrique revêtus, série courte
- PUNTE IN HSS-E, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 135°, under 1.6mm : Normal point
1.6mm & over : Split point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling stainless steels, difficult to cut materials such as titanium alloys and inconel.

- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 135°, unter 1.6mm : Normalanschliff
1.6mm & über : Kreuzanschliff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Tiefe Bohrungen in unlegierten und legierten Stählen, Grauguss, Temperguss, Aluminium- und Magnesiumlegierungen

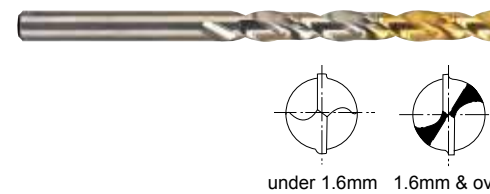

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
DLGP195062	6.2	63	101	DLGP195088	8.8	81	125		
DLGP195063	6.3	63	101	DLGP195089	8.9	81	125		
DLGP195064	6.4	63	101	DLGP195090	9.0	81	125		
DLGP195065	6.5	63	101	DLGP195091	9.1	81	125		
DLGP195066	6.6	63	101	DLGP195092	9.2	81	125		
DLGP195067	6.7	63	101	DLGP195093	9.3	81	125		
DLGP195068	6.8	69	109	DLGP195094	9.4	81	125		
DLGP195069	6.9	69	109	DLGP195095	9.5	81	125		
DLGP195070	7.0	69	109	DLGP195096	9.6	87	133		
DLGP195071	7.1	69	109	DLGP195097	9.7	87	133		
DLGP195072	7.2	69	109	DLGP195098	9.8	87	133		
DLGP195073	7.3	69	109	DLGP195099	9.9	87	133		
DLGP195074	7.4	69	109	DLGP195100	10.0	87	133		
DLGP195075	7.5	69	109	DLGP195101	10.1	87	133		
DLGP195076	7.6	75	117	DLGP195102	10.2	87	133		
DLGP195077	7.7	75	117	DLGP195103	10.3	87	133		
DLGP195078	7.8	75	117	DLGP195104	10.4	87	133		
DLGP195079	7.9	75	117	DLGP195105	10.5	87	133		
DLGP195080	8.0	75	117	DLGP195106	10.6	87	133		
DLGP195081	8.1	75	117	DLGP195107	10.7	94	142		
DLGP195082	8.2	75	117	DLGP195108	10.8	94	142		
DLGP195083	8.3	75	117	DLGP195109	10.9	94	142		
DLGP195084	8.4	75	117	DLGP195110	11.0	94	142		
DLGP195085	8.5	75	117	DLGP195111	11.1	94	142		
DLGP195086	8.6	81	125	DLGP195112	11.2	94	142		
DLGP195087	8.7	81	125	DLGP195113	11.3	94	142		

► NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○			○					○					○		○			

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA

HSS-E, STRAIGHT SHANK DRILLS, GOLD-P COATED


JOBBER

- HSS-E SPIRALBOHRER, GOLD-P BESCHICHTET
- Forets GOLD-P HSS-E queue cylindrique revêtus, série courte
- PUNTE IN HSS-E, GAMBO CILINDRICO, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand helix
- **Point Angle** : 135°, under 1.6mm : Normal point
1.6mm & over : Split point
- **Surface treatment** : Bright body, TiN coating on working area
- **Application** : Drilling stainless steels, difficult to cut materials such as titanium alloys and inconel.

- **Nutenform** : Rechtsspirale
- **Spitzenwinkel** : 135°, unter 1.6mm : Normalanschliff
1.6mm & über : Kreuzanschliff
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Tiefe Bohrungen in unlegierten und legierten Stählen, Grauguss, Temperguss, Aluminium- und Magnesiumlegierungen

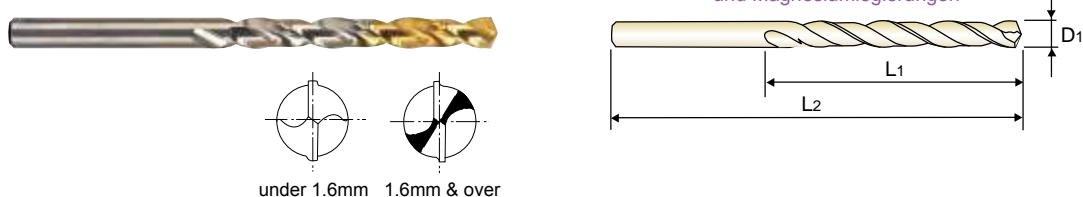

under 1.6mm 1.6mm & over



EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
DLGP195114	11.4	94	142
DLGP195115	11.5	94	142
DLGP195116	11.6	94	142
DLGP195117	11.7	94	142
DLGP195118	11.8	94	142
DLGP195119	11.9	101	151
DLGP195120	12.0	101	151
DLGP195121	12.1	101	151
DLGP195122	12.2	101	151

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
DLGP195123	12.3	101	151
DLGP195124	12.4	101	151
DLGP195125	12.5	101	151
DLGP195126	12.6	101	151
DLGP195127	12.7	101	151
DLGP195128	12.8	101	151
DLGP195129	12.9	101	151
DLGP195130	13.0	101	151

HSS-E, DH100 STRAIGHT SHANK DRILLS for DEEP HOLES, GOLD-P COATED


JOBBER

- HSS-E DH100 SPIRALBOHRER, für TIEFLOCH mit ZYLINDERSCHAFT, GOLD-P BESCHICHTET
- Forets GOLD-P HSS-E queue cylindrique revêtus, DH100 pour perçage profond, série courte
- PUNTE GAMBO CILINDRICO DH100 IN HSS-E, PER FORI PROFONDI, GOLD-P

KURZ
COURTE
CORTA

- **Flute Geometry** : Right hand, 38° helix, DH100 worm pattern type.
- **Point Angle** : 130°, Split point giving higher chip removal.
- **Surface treatment** : Bright body, TiN coating on working area.
- **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, or magnesium alloys.

- **Nutenform** : 38° Rechtsspirale, DH 100 Flachnut
- **Spitzenwinkel** : Durch 130° Kreuzanschliff Gute Spanabfuhr
- **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
- **Anwendung** : Tiefe Bohrungen in unlegierten und legierten Stählen, Grauguss, Temperguss, Aluminium- und Magnesiumlegierungen

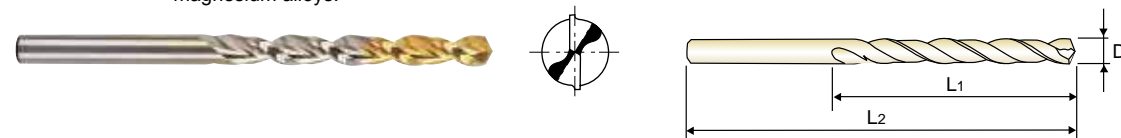

► **DH100** worm pattern drills

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
DLGP506020	2.0	24	49
DLGP506021	2.1	24	49
DLGP506022	2.2	27	53
DLGP506023	2.3	27	53
DLGP506024	2.4	30	57
DLGP506025	2.5	30	57
DLGP506026	2.6	30	57
DLGP506027	2.7	33	61
DLGP506028	2.8	33	61
DLGP506029	2.9	33	61
DLGP506030	3.0	33	61
DLGP506031	3.1	36	65
DLGP506032	3.2	36	65
DLGP506033	3.3	36	65
DLGP506034	3.4	39	70
DLGP506035	3.5	39	70
DLGP506036	3.6	39	70
DLGP506037	3.7	39	70
DLGP506038	3.8	43	75
DLGP506039	3.9	43	75
DLGP506040	4.0	43	75
DLGP506041	4.1	43	75
DLGP506042	4.2	43	75
DLGP506043	4.3	47	80
DLGP506044	4.4	47	80
DLGP506045	4.5	47	80

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
DLGP506046	4.6	47	80
DLGP506047	4.7	47	80
DLGP506048	4.8	52	86
DLGP506049	4.9	52	86
DLGP506050	5.0	52	86
DLGP506051	5.1	52	86
DLGP506052	5.2	52	86
DLGP506053	5.3	52	86
DLGP506054	5.4	57	93
DLGP506055	5.5	57	93
DLGP506056	5.6	57	93
DLGP506057	5.7	57	93
DLGP506058	5.8	57	93
DLGP506059	5.9	57	93
DLGP506060	6.0	57	93
DLGP506061	6.1	63	101
DLGP506062	6.2	63	101
DLGP506063	6.3	63	101
DLGP506064	6.4	63	101
DLGP506065	6.5	63	101
DLGP506066	6.6	63	101
DLGP506067	6.7	63	101
DLGP506068	6.8	69	109
DLGP506069	6.9	69	109
DLGP506070	7.0	69	109
DLGP506071	7.1	69	109

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	◎	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	55	60	42	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○								○					○					

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	◎	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	55	60	42	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○								○					○					

HSS-E, DH100 STRAIGHT SHANK DRILLS for DEEP HOLES, GOLD-P COATED **JOBBER**

● HSS-E DH100 SPIRALBOHRER, für TIEFLOCH mit ZYLINDERSCHAFT, GOLD-P BESCHICHTET **KURZ**
● Forets GOLD-P HSS-E queue cylindrique revêtus, DH100 pour perçage profond, série courte **COURTE**
● PUNTE GAMBO CILINDRICO DH100 IN HSS-E, PER FORI PROFONDI, GOLD-P **CORTA**

- ▶ **Flute Geometry** : Right hand, 38° helix, DH100 worm pattern type.
 - ▶ **Point Angle** : 130°, Split point giving higher chip removal.
 - ▶ **Surface treatment** : Bright body, TiN coating on working area.
 - ▶ **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, or magnesium alloys.
- ▶ **Nutenform** : 38° Rechtsspirale, DH 100 Flachnut
 - ▶ **Spitzenwinkel** : Durch 130° Kreuzanschliff Gute Spanabfuhr
 - ▶ **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
 - ▶ **Anwendung** : Tiefe Bohrungen in unlegierten und legierten Stählen, Grauguss, Temperguss, Aluminium- und Magnesiumlegierungen

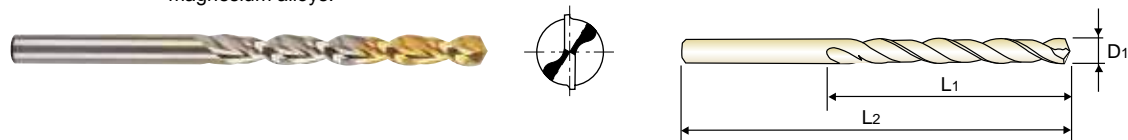

▶ DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
DLGP506072	7.2	69	109	DLGP506098	9.8	87	133		
DLGP506073	7.3	69	109	DLGP506099	9.9	87	133		
DLGP506074	7.4	69	109	DLGP506100	10.0	87	133		
DLGP506075	7.5	69	109	DLGP506101	10.1	87	133		
DLGP506076	7.6	75	117	DLGP506102	10.2	87	133		
DLGP506077	7.7	75	117	DLGP506103	10.3	87	133		
DLGP506078	7.8	75	117	DLGP506104	10.4	87	133		
DLGP506079	7.9	75	117	DLGP506105	10.5	87	133		
DLGP506080	8.0	75	117	DLGP506106	10.6	87	133		
DLGP506081	8.1	75	117	DLGP506107	10.7	94	142		
DLGP506082	8.2	75	117	DLGP506108	10.8	94	142		
DLGP506083	8.3	75	117	DLGP506109	10.9	94	142		
DLGP506084	8.4	75	117	DLGP506110	11.0	94	142		
DLGP506085	8.5	75	117	DLGP506111	11.1	94	142		
DLGP506086	8.6	81	125	DLGP506112	11.2	94	142		
DLGP506087	8.7	81	125	DLGP506113	11.3	94	142		
DLGP506088	8.8	81	125	DLGP506114	11.4	94	142		
DLGP506089	8.9	81	125	DLGP506115	11.5	94	142		
DLGP506090	9.0	81	125	DLGP506116	11.6	94	142		
DLGP506091	9.1	81	125	DLGP506117	11.7	94	142		
DLGP506092	9.2	81	125	DLGP506118	11.8	94	142		
DLGP506093	9.3	81	125	DLGP506119	11.9	101	151		
DLGP506094	9.4	81	125	DLGP506120	12.0	101	151		
DLGP506095	9.5	81	125	DLGP506121	12.1	101	151		
DLGP506096	9.6	87	133	DLGP506122	12.2	101	151		
DLGP506097	9.7	87	133	DLGP506123	12.3	101	151		

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

HSS-E, DH100 STRAIGHT SHANK DRILLS for DEEP HOLES, GOLD-P COATED **JOBBER**

● HSS-E DH100 SPIRALBOHRER, für TIEFLOCH mit ZYLINDERSCHAFT, GOLD-P BESCHICHTET **KURZ**
● Forets GOLD-P HSS-E queue cylindrique revêtus, DH100 pour perçage profond, série courte **COURTE**
● PUNTE GAMBO CILINDRICO DH100 IN HSS-E, PER FORI PROFONDI, GOLD-P **CORTA**

- ▶ **Flute Geometry** : Right hand, 38° helix, DH100 worm pattern type.
 - ▶ **Point Angle** : 130°, Split point giving higher chip removal.
 - ▶ **Surface treatment** : Bright body, TiN coating on working area.
 - ▶ **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, or magnesium alloys.
- ▶ **Nutenform** : 38° Rechtsspirale, DH 100 Flachnut
 - ▶ **Spitzenwinkel** : Durch 130° Kreuzanschliff Gute Spanabfuhr
 - ▶ **Oberfläche** : Blank mit TiN-Beschichtung im Arbeitsbereich
 - ▶ **Anwendung** : Tiefe Bohrungen in unlegierten und legierten Stählen, Grauguss, Temperguss, Aluminium- und Magnesiumlegierungen

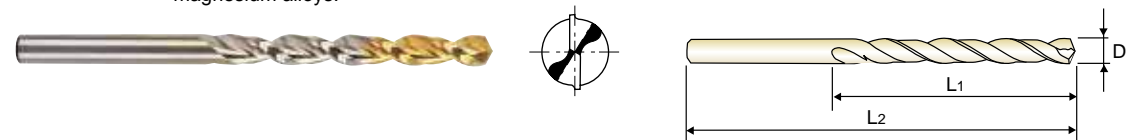

▶ DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
DLGP506124	12.4	101	151	DLGP506128	12.8	101	151		
DLGP506125	12.5	101	151	DLGP506129	12.9	101	151		
DLGP506126	12.6	101	151	DLGP506130	13.0	101	151		
DLGP506127	12.7	101	151						

GOLD-P COATED DRILL SETS

- GOLD-P BESCHICHTET BOHRER SATS
- Coffrets de Forets GOLD-P revêtus
- SET DI PUNTE GOLD-P



DIN338 DRILL SETS JOBBER LENGTH Gold-P coated Drills

EDP No.	DESCRIPTON	SIZE	Q'TY
D1GP165SET1	HSS Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-10.0x0.5mm step	19 pcs
D1GP165SET2	HSS Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-13.0x0.5mm step	25 pcs
D1GP165SET3	HSS Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-10.5x0.5mm step +3.3 +4.2 +6.8 +10.2	24 pcs
DLGP195SET1	HSS-E Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-10.0x0.5mm step	19 pcs
DLGP195SET2	HSS-E Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-13.0x0.5mm step	25 pcs
DLGP195SET3	HSS-E Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-10.5x0.5mm step +3.3 +4.2 +6.8 +10.2	24 pcs
DLGPSET982	HSS-E Straight Shank, Split Point (Ø1.0 & Ø1.5 : NORMAL point)	1.0-10.0x0.1mm step	91 pcs

**RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER**

D1GP125, D1GP165, DLGP195, DLGP506 SERIES HSS & HSS-E GOLD-P DRILLS RPM = rev./min. FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					2.0	3.0	4.0	6.0	8.0	10.0	13.0	
P	1	Non-alloy steel	40	RPM	6370	4240	3180	2120	1590	1270	980	
	2		FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24		
	3		RPM	5570	3710	2790	1860	1390	1110	860		
	4		FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24		
	5		RPM	4770	3180	2390	1590	1190	950	730		
	6	Low alloy steel	30	FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24	
	7		RPM	4770	3180	2390	1590	1190	950	730		
	8		FEED	0.02-0.05	0.02-0.06	0.04-0.08	0.04-0.10	0.06-0.12	0.08-0.14	0.12-0.18		
	9		RPM	3180	2120	1590	1060	800	640	490		
	10	High alloyed steel, and tool steel	20	FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24	
	11		RPM	3180	2120	1590	1060	800	640	490		
M	12	Stainless steel	25	RPM	3980	2650	1990	1330	990	800	610	
	13		FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24		
	14		RPM	3180	2120	1590	1060	800	640	490		
K	15	Grey cast iron	40	RPM	2390	1590	1190	800	600	480	370	
	16		FEED	0.02-0.05	0.02-0.06	0.04-0.08	0.04-0.10	0.06-0.12	0.08-0.14	0.12-0.18		
	17	Nodular cast iron	40	RPM	6370	4240	3180	2120	1590	1270	980	
	18		FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24		
	19	Malleable cast iron	35	RPM	5570	3710	2790	1860	1390	1110	860	
	20		FEED	0.02-0.05	0.02-0.06	0.04-0.08	0.04-0.10	0.06-0.12	0.08-0.14	0.12-0.18		
	21		RPM	6370	4240	3180	2120	1590	1270	980		
	22		FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24		
N	23	Aluminum-wrought alloy	65	RPM	6370	4240	3180	2120	1590	1270	980	
	24		FEED	0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24		
	25	Aluminum-cast, alloyed	65	RPM	10350	6900	5170	3450	2590	2070	1590	
	26		FEED	0.05-0.09	0.07-0.11	0.12-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.22-0.28		
	27	Copper and Copper Alloys (Bronze / Brass)	50	RPM	10350	6900	5170	3450	2590	2070	1590	
	28		FEED	0.05-0.09	0.07-0.11	0.12-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.22-0.28		
	29	Non Metallic Materials	30	RPM	7960	5310	3980	2650	1990	1590	1220	
	30		FEED	0.05-0.09	0.07-0.11	0.12-0.16	0.12-0.18	0.14-0.20	0.16-0.22	0.22-0.28		
	S	31	Heat Resistant Super Alloys									
		32										
33												
34												
35												
36		Titanium Alloys		20	RPM	4770	3180	2390	1590	1190	950	730
37	FEED		0.04-0.08	0.06-0.10	0.08-0.12	0.12-0.16	0.12-0.18	0.16-0.22	0.18-0.24			
H	38	Hardened steel										
	39											
	40		Chilled Cast Iron									
	41			Hardened Cast Iron								



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



SUPER HSS

**SUPER-GP
DRILLS**

SUPER-GP DRILLS

- All Applications Regardless of Machining Conditions; Good or Poor
- Für alle Anwendungen unabhängig von den Bearbeitungsbedingungen; gut oder schlecht

HOLEMAKING

SELECTION GUIDE



SERIES	DSH105
STANDARD	DIN338
LENGTH	JOBBER
SIZE MIN	D2.0
SIZE MAX	D13.0
PAGE	223
SURFACE TREATMENT	Steam Tempered

**SUPER HSS
SUPER-GP DRILLS**

All Applications Regardless of Machining Conditions; Good or Poor



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.226

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc		
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	
	2		About 0.45% C Annealed	190	13	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	
	4		About 0.75% C Annealed	270	28	○	
	5	About 0.75% C Quenched & Tempered	300	32	○		
	6	Low alloy steel	Annealed	180	10	◎	
	7		Quenched & Tempered	275	29	○	
	8		Quenched & Tempered	300	32	○	
	9		Quenched & Tempered	350	38	○	
	10		High alloyed steel, and tool steel	Annealed	200	15	○
	M	11		Quenched & Tempered	325	35	○
12		Stainless steel	Ferritic / Martensitic Annealed	200	15	○	
13			Martensitic Quenched & Tempered	240	23	○	
14			Austenitic	180	10	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	
	16		Pearlitic (Martensitic)	260	26	○	
	17	Nodular cast iron	Ferritic	160	3	○	
	18		Pearlitic	250	25	○	
	19		Ferritic	130		○	
	20	Malleable cast iron	Pearlitic	230	21	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	
	22		Curable Hardened	100		○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	
	24		≤ 12% Si, Curable Hardened	90		○	
	25		> 12% Si, Not Curable	130		○	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	
	27		CuZn, CuSnZn (Brass)	90		○	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100		○	
	29		Duroplastic, Fiber Reinforced Plastic			○	
	30		Rubber, Wood, etc.			○	
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	
	32		Cured	280	30	○	
	33		Annealed	250	25	○	
	34		Ni or Co Based Cured	350	38	○	
	35	Cast	320	34	○		
H	36	Titanium Alloys	Pure Titanium	400 Rm		○	
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	
	38	Hardened steel	Hardened	550	55	○	
	39		Hardened	630	60	○	
	40		Chilled Cast Iron	Cast	400	42	○
	41		Hardened Cast Iron	Hardened	550	55	○



DSH105 SERIES

SUPER HSS, SUPER-GP DRILLS (DIN338)

- SUPER HSS, SUPER-GP DRILLS (DIN338)
- Forets SUPER-GP Super HSS, queue cylindrique (DIN338)
- PUNTA SUPER-GP DRILL, IN SUPER-HSS, GAMBO CILINDRICO (DIN338)

JOBBER
KURZ
COURTE
CORTA

- ▶ Surface treatment: Steam Tempered (Black Oxide Finish)
- ▶ Applications: Excellent tool performance in steels, cast iron, alloy steels and malleable cast iron.
- ▶ Special HSS improves toughness, wear resistance as well as extends dramatically the tool life.
- ▶ All applications regardless of machine condition: Good or Poor.

- ▶ Oberflächenbehandlung: Dampfgehärtet (Schwarze Oxydschicht)
- ▶ Anwendungen: Ausgezeichnete Leistung bei Stählen, Gusseisen, legierten Stählen und Temperguss.
- ▶ Spezial-HSS verbessert Zähigkeit, Verschleißfestigkeit und verlängert drastisch die Standzeit.
- ▶ Alle Anwendungen unabhängig vom Maschinenzustand: Gut oder schlecht.



EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
*DSH105020	2.0	24	49	*DSH105044	4.4	47	80
*DSH105021	2.1	24	49	*DSH105045	4.5	47	80
*DSH105022	2.2	27	53	*DSH105046	4.6	47	80
*DSH105023	2.3	27	53	*DSH105047	4.7	47	80
*DSH105024	2.4	30	57	*DSH105048	4.8	52	86
*DSH105025	2.5	30	57	*DSH105049	4.9	52	86
*DSH105026	2.6	30	57	*DSH105050	5.0	52	86
*DSH105027	2.7	33	61	*DSH105051	5.1	52	86
*DSH105028	2.8	33	61	*DSH105052	5.2	52	86
*DSH105029	2.9	33	61	*DSH105053	5.3	52	86
*DSH105030	3.0	33	61	*DSH105054	5.4	57	93
*DSH105031	3.1	36	65	*DSH105055	5.5	57	93
*DSH105032	3.2	36	65	*DSH105056	5.6	57	93
*DSH105033	3.3	36	65	*DSH105057	5.7	57	93
*DSH105034	3.4	39	70	*DSH105058	5.8	57	93
*DSH105035	3.5	39	70	*DSH105059	5.9	57	93
*DSH105036	3.6	39	70	*DSH105060	6.0	57	93
*DSH105037	3.7	39	70	*DSH105061	6.1	63	101
*DSH105038	3.8	43	75	*DSH105062	6.2	63	101
*DSH105039	3.9	43	75	*DSH105063	6.3	63	101
*DSH105040	4.0	43	75	*DSH105064	6.4	63	101
*DSH105041	4.1	43	75	*DSH105065	6.5	63	101
*DSH105042	4.2	43	75	*DSH105066	6.6	63	101
*DSH105043	4.3	47	80	*DSH105067	6.7	63	101

* 10pcs per package
** 5pcs per package

▶ NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	10	26	3	25	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S					H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

SUPER HSS, SUPER-GP DRILLS (DIN338)

JOBBER

- SUPER HSS, SUPER-GP DRILLS (DIN338)
- Forets SUPER-GP Super HSS, queue cylindrique (DIN338)
- PUNTA SUPER-GP DRILL, IN SUPER-HSS, GAMBO CILINDRICO (DIN338)

KURZ
COURTE
CORTA

- ▶Surface treatment: Steam Tempered (Black Oxide Finish)
- ▶Applications: Excellent tool performance in steels, cast iron, alloy steels and malleable cast iron.
- ▶Special HSS improves toughness, wear resistance as well as extends dramatically the tool life.
- ▶All applications regardless of machine condition: Good or Poor.

- ▶Oberflächenbehandlung: Dampfgehärtet (Schwarze Oxydschicht)
- ▶Anwendungen: Ausgezeichnete Leistung bei Stählen, Gusseisen, legierten Stählen und Temperguss.
- ▶Spezial-HSS verbessert Zähigkeit, Verschleissfestigkeit und verlängert drastisch die Standzeit.
- ▶Alle Anwendungen unabhängig vom Maschinenzustand: Gut oder schlecht.



EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
*DSH105068	6.8	69	109	**DSH105092	9.2	81	125
*DSH105069	6.9	69	109	**DSH105093	9.3	81	125
*DSH105070	7.0	69	109	**DSH105094	9.4	81	125
*DSH105071	7.1	69	109	**DSH105095	9.5	81	125
*DSH105072	7.2	69	109	**DSH105096	9.6	87	133
*DSH105073	7.3	69	109	**DSH105097	9.7	87	133
*DSH105074	7.4	69	109	**DSH105098	9.8	87	133
*DSH105075	7.5	69	109	**DSH105099	9.9	87	133
*DSH105076	7.6	75	117	**DSH105100	10.0	87	133
*DSH105077	7.7	75	117	**DSH105101	10.1	87	133
*DSH105078	7.8	75	117	**DSH105102	10.2	87	133
*DSH105079	7.9	75	117	**DSH105103	10.3	87	133
*DSH105080	8.0	75	117	**DSH105104	10.4	87	133
*DSH105081	8.1	75	117	**DSH105105	10.5	87	133
*DSH105082	8.2	75	117	**DSH105106	10.6	87	133
*DSH105083	8.3	75	117	**DSH105107	10.7	94	142
**DSH105084	8.4	75	117	**DSH105108	10.8	94	142
**DSH105085	8.5	75	117	**DSH105109	10.9	94	142
**DSH105086	8.6	81	125	**DSH105110	11.0	94	142
**DSH105087	8.7	81	125	**DSH105111	11.1	94	142
**DSH105088	8.8	81	125	**DSH105112	11.2	94	142
**DSH105089	8.9	81	125	**DSH105113	11.3	94	142
**DSH105090	9.0	81	125	**DSH105114	11.4	94	142
**DSH105091	9.1	81	125	**DSH105115	11.5	94	142

* 10pcs per package
** 5pcs per package

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○					○					

SUPER HSS, SUPER-GP DRILLS (DIN338)

JOBBER

- SUPER HSS, SUPER-GP DRILLS (DIN338)
- Forets SUPER-GP Super HSS, queue cylindrique (DIN338)
- PUNTA SUPER-GP DRILL, IN SUPER-HSS, GAMBO CILINDRICO (DIN338)

KURZ
COURTE
CORTA

- ▶Surface treatment: Steam Tempered (Black Oxide Finish)
- ▶Applications: Excellent tool performance in steels, cast iron, alloy steels and malleable cast iron.
- ▶Special HSS improves toughness, wear resistance as well as extends dramatically the tool life.
- ▶All applications regardless of machine condition: Good or Poor.

- ▶Oberflächenbehandlung: Dampfgehärtet (Schwarze Oxydschicht)
- ▶Anwendungen: Ausgezeichnete Leistung bei Stählen, Gusseisen, legierten Stählen und Temperguss.
- ▶Spezial-HSS verbessert Zähigkeit, Verschleissfestigkeit und verlängert drastisch die Standzeit.
- ▶Alle Anwendungen unabhängig vom Maschinenzustand: Gut oder schlecht.



EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
**DSH105116	11.6	94	142	**DSH105124	12.4	101	151
**DSH105117	11.7	94	142	**DSH105125	12.5	101	151
**DSH105118	11.8	94	142	**DSH105126	12.6	101	151
**DSH105119	11.9	101	151	**DSH105127	12.7	101	151
**DSH105120	12.0	101	151	**DSH105128	12.8	101	151
**DSH105121	12.1	101	151	**DSH105129	12.9	101	151
**DSH105122	12.2	101	151	**DSH105130	13.0	101	151
**DSH105123	12.3	101	151				

* 10pcs per package
** 5pcs per package

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○					○					



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DSH105 SERIES SUPER HSS, SUPER-GP DRILLS (DIN338)

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)					
					2.0	3.0	4.0	6.0	8.0	
P	1	Non-alloy steel	30	RPM FEED	4770 0.02-0.04	3180 0.03-0.05	2390 0.04-0.06	1590 0.05-0.08	1190 0.10-0.13	
	2		25	RPM FEED	3980 0.02-0.04	2650 0.03-0.05	1990 0.04-0.06	1330 0.05-0.08	990 0.10-0.13	
	3		20	RPM FEED	3180 0.02-0.04	2120 0.03-0.05	1590 0.04-0.06	1060 0.05-0.08	800 0.10-0.13	
	4		20	RPM FEED	3180 0.01-0.02	2120 0.01-0.03	1590 0.02-0.04	1060 0.02-0.05	800 0.03-0.06	
	5									
	6	Low alloy steel	25	RPM FEED	3980 0.02-0.04	2650 0.03-0.05	1990 0.04-0.06	1330 0.05-0.08	990 0.10-0.13	
	7		20	RPM FEED	3180 0.02-0.04	2120 0.03-0.05	1590 0.04-0.06	1060 0.05-0.08	800 0.10-0.13	
	8		20	RPM FEED	3180 0.01-0.02	2120 0.01-0.03	1590 0.02-0.04	1060 0.02-0.05	800 0.03-0.06	
	9									
	10		High alloyed steel, and tool steel	15	RPM FEED	2390 0.02-0.04	1590 0.03-0.05	1190 0.04-0.06	800 0.05-0.08	600 0.10-0.13
	11									
M	12	Stainless steel	20	RPM FEED	3180 0.02-0.04	2120 0.03-0.05	1590 0.04-0.06	1060 0.05-0.08	800 0.10-0.13	
	13		15	RPM FEED	2390 0.02-0.04	1590 0.03-0.05	1190 0.04-0.06	800 0.05-0.08	600 0.10-0.13	
	14		10	RPM FEED	1590 0.01-0.02	1060 0.01-0.03	800 0.02-0.04	530 0.02-0.05	400 0.03-0.06	
K	15	Grey cast iron	30	RPM FEED	4770 0.02-0.04	3180 0.03-0.05	2390 0.04-0.06	1590 0.05-0.08	1190 0.10-0.13	
	16		25	RPM FEED	3980 0.01-0.02	2650 0.01-0.03	1990 0.02-0.04	1330 0.02-0.05	990 0.03-0.06	
	17	Nodular cast iron	30	RPM FEED	4770 0.02-0.04	3180 0.03-0.05	2390 0.04-0.06	1590 0.05-0.08	1190 0.10-0.13	
	18									
	19		Malleable cast iron	25	RPM FEED	3980 0.02-0.04	2650 0.03-0.05	1990 0.04-0.06	1330 0.05-0.08	990 0.1-0.13
20										
N	21	Aluminum-wrought alloy	55	RPM FEED	8750 0.03-0.06	5840 0.05-0.09	4380 0.07-0.11	2920 0.12-0.16	2190 0.12-0.18	
	22		55	RPM FEED	8750 0.03-0.06	5840 0.05-0.09	4380 0.07-0.11	2920 0.12-0.16	2190 0.12-0.18	
	23	Aluminum-cast, alloyed	40	RPM FEED	6370 0.03-0.06	4240 0.05-0.09	3180 0.07-0.11	2120 0.12-0.16	1590 0.12-0.18	
	24									
	25									
	26									
	27		Copper and Copper Alloys (Bronze / Brass)							
	28									
	29		Non Metallic Materials	20	RPM FEED	3180 0.02-0.04	2120 0.03-0.05	1590 0.04-0.06	1060 0.05-0.08	800 0.10-0.13
	30									
S	31	Heat Resistant Super Alloys								
	32									
	33									
	34									
	35									
	36	Titanium Alloys	10	RPM FEED	1590 0.01-0.03	1060 0.02-0.04	800 0.03-0.05	530 0.04-0.07	400 0.05-0.08	
	37									
H	38	Hardened steel								
	39									
	40	Chilled Cast Iron								
	41	Hardened Cast Iron								



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm)	
		10.0	13.0
1	RPM FEED	950 0.11-0.15	730 0.11-0.17
2	RPM FEED	800 0.11-0.15	610 0.11-0.17
3	RPM FEED	640 0.11-0.15	490 0.11-0.17
4	RPM FEED	640 0.03-0.06	490 0.04-0.10
5			
6	RPM FEED	800 0.11-0.15	610 0.11-0.17
7	RPM FEED	640 0.11-0.15	490 0.11-0.17
8	RPM FEED	640 0.03-0.06	490 0.04-0.10
9			
10	RPM FEED	480 0.11-0.15	370 0.11-0.17
11			
12	RPM FEED	640 0.11-0.15	490 0.11-0.17
13	RPM FEED	480 0.11-0.15	370 0.11-0.17
14	RPM FEED	320 0.03-0.06	240 0.04-0.10
15	RPM FEED	950 0.11-0.15	730 0.11-0.17
16	RPM FEED	800 0.03-0.06	610 0.04-0.10
17	RPM FEED	950 0.11-0.15	730 0.11-0.17
18			
19	RPM FEED	800 0.11-0.15	610 0.11-0.17
20			
21	RPM FEED	1750 0.14-0.20	1350 0.16-0.22
22	RPM FEED	1750 0.14-0.20	1350 0.16-0.22
23	RPM FEED	1270 0.14-0.20	980 0.16-0.22
24			
25			
26			
27			
28			
29	RPM FEED	640 0.11-0.15	490 0.11-0.17
30			
31			
32			
33			
34			
35			
36	RPM FEED	320 0.05-0.09	240 0.06-0.10
37			
38			
39			
40			
41			



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING

HSS, HSS-E & HSSCo8

STRAIGHT SHANK DRILLS

BOHRER MIT ZYLINDERSCHAFT

- For General Purpose (Soft & Tough Materials)
- Für allgemeine Anwendungen (weiche & zähe Materialien)

SELECTION GUIDE



SERIES	D2107	D1107	D2105
STANDARD	DIN1897	DIN1897	DIN338
LENGTH	STUB	STUB	JOBBER
SIZE MIN	D1.0	D1.0	D1.0
SIZE MAX	D31.0	D13.0	D20.0
PAGE	234	238	241

SURFACE TREATMENT	Gold Coloring	Steam Tempered	Gold Coloring
-------------------	---------------	----------------	---------------

HSS, HSS-E & HSSCo8 STRAIGHT SHANK DRILLS

For General Purpose (Soft & Tough Materials)

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.276

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	
	4		About 0.75% C Annealed	270	28	○	○	○	
	5		About 0.75% C Quenched & Tempered	300	32				
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	
	7		Quenched & Tempered	275	29	○	○	○	
	8		Quenched & Tempered	300	32	○	○	○	
	9		Quenched & Tempered	350	38				
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○
	11		Quenched & Tempered	325	35				
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	○	◎	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	
	14	Austenitic	180	10	○	○	○		
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	
	16		Pearlitic (Martensitic)	260	26	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	
	18		Pearlitic	250	25				
	19		Ferritic	130					
20	Malleable cast iron	Pearlitic	230	21	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	
	22		Curable Hardened	100		○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			○	○	○	
30	Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15				
	32		Cured	280	30				
	33		Annealed	250	25				
	34		Ni or Co Based Cured	350	38				
	35		Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	
37		Alpha + Beta Alloys	Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55				
	39		Hardened	630	60				
	40		Chilled Cast Iron	Cast	400	42			
	41		Hardened Cast Iron	Hardened	550	55			



DL105	D1105	D1125	D2104	D1121	DL109	D1100	D1106
DIN338	DIN338	DIN338	DIN340	DIN1869/1	DIN338	DIN338	DIN338
JOBBER	JOBBER	JOBBER	LONG	EXTRA LONG	JOBBER	JOBBER	JOBBER
D1.0	D0.3	D2.0	D2.0	D2.0	D1.5	D1.5	D1.5
D20.0	D20.0	D20.0	D12.0	D13.0	D13.0	D13.0	D13.0
244	247	252	255	257	258	259	261
Gold Coloring	Steam Tempered	Bright	Gold Coloring	Steam Tempered	Bright		



◎	◎	◎	◎	◎	◎			1
◎	◎	◎	◎	◎	◎			2
◎	◎	◎	◎	◎	◎			3
○	○	○	○	○	○			4
								5
◎	◎	◎	◎	◎	◎			6
○	○	○	○	○	○			7
○	○	○	○	○	○			8
								9
○	○	○	○	○	○			10
								11
◎	○	○	◎	○	◎			12
○	○	○	○	○	○			13
○	○	○	○	○	○			14
○	○	○	○	○	○			15
○	○	○	○	○	○			16
○	○	○	○	○	○			17
○	○	○	○	○	○			18
○	○	○	○	○	○			19
○	○	○	○	○	○			20
○	○	○	○	○	○			21
○	○	○	○	○	○			22
○	○	○	○	○	○			23
○	○	○	○	○	○			24
								25
								26
								27
○	○	○	○	○	○			28
								29
								30
								31
								32
								33
								34
○	○	○	○	○	○			35
								36
								37
								38
								39
								40
								41

SELECTION GUIDE



SERIES	DH100 DL510	DH100 DL508	DH100 DL509
STANDARD	DIN1897	DIN338	DIN340
LENGTH	STUB	JOBBER	LONG
SIZE MIN	D2.0	D2.0	D2.0
SIZE MAX	D20.0	D16.0	D12.0
PAGE	263	265	267

SURFACE TREATMENT

Bright

HSS-E STRAIGHT SHANK DRILLS

For General Purpose (Soft & Tough Materials)



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.276


ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C Annealed	270	28	○	○	○
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	○	○	○
	8		Quenched & Tempered	300	32	○	○	○
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○
	11		Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15			
	13		Martensitic Quenched & Tempered	240	23			
	14	Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○
	18		Pearlitic	250	25	○	○	○
	19		Ferritic	130		○	○	○
20	Malleable cast iron	Pearlitic	230	21	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60				◎
	22		Curable Hardened	100				◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				○
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
28		CuSn, lead-free copper and electrolytic copper	100					
29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35		Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm				
37		Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

DH100 DL505	DH100 DL504	DH100 DT600	DH100 DT692	DH100 DT693	DH100 DL608	DH50 DL507
DIN338	DIN340	DIN1869/1	DIN1869/2	DIN1869/3	DIN341	-
JOBBER	LONG	EXTRA LONG			LONG	EXTRA LONG
D2.0	D2.0	D2.0	D3.0	D4.0	D13.0	D2.0
D13.0	D13.0	D10.5	D10.2	D10.0	D30.0	D13.0
269	271	272			273	274

Steam Tempered

TiAIN

Bright

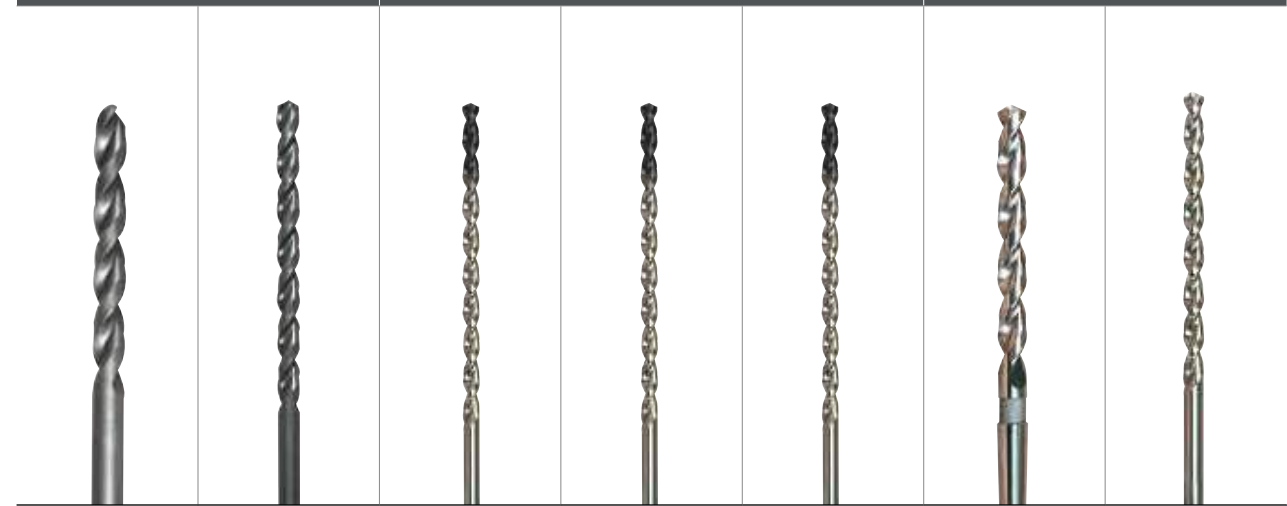

◎	◎	◎	◎	◎	◎	○	1
◎	◎	◎	◎	◎	◎		2
◎	◎	◎	◎	◎	◎		3
○	○	○	○	○	○		4
							5
◎	◎	◎	◎	◎	◎		6 P
○	○	○	○	○	○		7
○	○	○	○	○	○		8
○	○	○	○	○	○		9
○	○	○	○	○	○		10
							11
							12
							13 M
							14
○	○	○	○	○	○		15
○	○	○	○	○	○		16
○	○	○	○	○	○		17 K
○	○	○	○	○	○		18
○	○	○	○	○	○		19
○	○	○	○	○	○		20
						◎	21
						◎	22
						○	23
							24
							25 N
							26
							27
							28
							29
							30
							31
							32
							33
							34 S
							35
							36
							37
							38
							39 H
							40
							41

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS


STUB

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

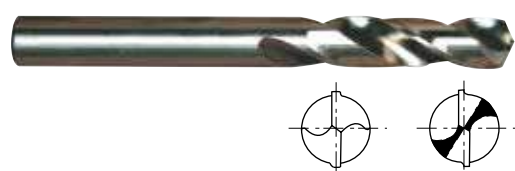

under 1.6mm 1.6mm & over

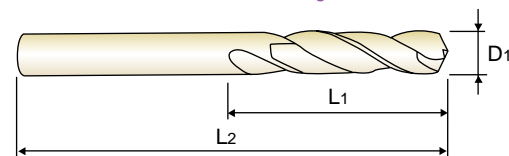

DIN 1897 HSS Co8 33° h8 135° P.276-277

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2107010	1.0	6	26	D2107032	3.2	18	49
D2107011	1.1	7	28	D2107932	3.25	18	49
D2107012	1.2	8	30	D2107033	3.3	18	49
D2107912	1.25	8	30	D2107034	3.4	20	52
D2107013	1.3	8	30	D2107035	3.5	20	52
D2107014	1.4	9	32	D2107036	3.6	20	52
D2107015	1.5	9	32	D2107037	3.7	20	52
D2107016	1.6	10	34	D2107937	3.75	20	52
D2107017	1.7	10	34	D2107038	3.8	22	55
D2107917	1.75	11	36	D2107039	3.9	22	55
D2107018	1.8	11	36	D2107040	4.0	22	55
D2107019	1.9	11	36	D2107041	4.1	22	55
D2107020	2.0	12	38	D2107042	4.2	22	55
D2107021	2.1	12	38	D2107942	4.25	22	55
D2107022	2.2	13	40	D2107043	4.3	24	58
D2107922	2.25	13	40	D2107044	4.4	24	58
D2107023	2.3	13	40	D2107045	4.5	24	58
D2107024	2.4	14	43	D2107046	4.6	24	58
D2107025	2.5	14	43	D2107946	4.65	24	58
D2107026	2.6	14	43	D2107047	4.7	24	58
D2107027	2.7	16	46	D2107947	4.75	24	58
D2107927	2.75	16	46	D2107048	4.8	26	62
D2107028	2.8	16	46	D2107049	4.9	26	62
D2107029	2.9	16	46	D2107050	5.0	26	62
D2107030	3.0	16	46	D2107051	5.1	26	62
D2107031	3.1	18	49	D2107052	5.2	26	62

► HSS-E(DL107) is available on your request.
► TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P									M					K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS


STUB

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

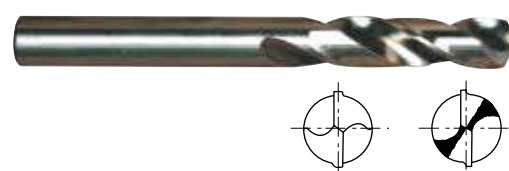

under 1.6mm 1.6mm & over

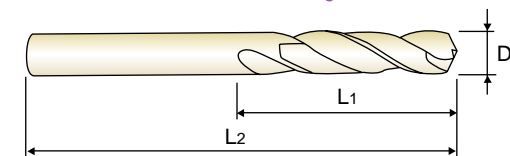

DIN 1897 HSS Co8 33° h8 135° P.276-277

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2107952	5.25	26	62	D2107073	7.3	34	74
D2107053	5.3	26	62	D2107074	7.4	34	74
D2107054	5.4	28	66	D2107974	7.45	34	74
D2107055	5.5	28	66	D2107075	7.5	34	74
D2107955	5.55	28	66	D2107076	7.6	37	79
D2107056	5.6	28	66	D2107077	7.7	37	79
D2107057	5.7	28	66	D2107977	7.75	37	79
D2107957	5.75	28	66	D2107078	7.8	37	79
D2107058	5.8	28	66	D2107079	7.9	37	79
D2107059	5.9	28	66	D2107080	8.0	37	79
D2107060	6.0	28	66	D2107081	8.1	37	79
D2107061	6.1	31	70	D2107082	8.2	37	79
D2107062	6.2	31	70	D2107982	8.25	37	79
D2107962	6.25	31	70	D2107083	8.3	37	79
D2107063	6.3	31	70	D2107084	8.4	37	79
D2107064	6.4	31	70	D2107085	8.5	37	79
D2107065	6.5	31	70	D2107086	8.6	40	84
D2107066	6.6	31	70	D2107087	8.7	40	84
D2107067	6.7	31	70	D2107987	8.75	40	84
D2107967	6.75	34	74	D2107088	8.8	40	84
D2107068	6.8	34	74	D2107089	8.9	40	84
D2107069	6.9	34	74	D2107090	9.0	40	84
D2107070	7.0	34	74	D2107091	9.1	40	84
D2107071	7.1	34	74	D2107092	9.2	40	84
D2107072	7.2	34	74	D2107992	9.25	40	84
D2107972	7.25	34	74	D2107093	9.3	40	84

► HSS-E(DL107) is available on your request.
► TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P									M					K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS



STUB

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

▶ **Surface treatment** : Coloring(Gold color)
▶ **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

▶ **Oberflächenbehandlung** : Coloring(Goldfarbe)
▶ **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

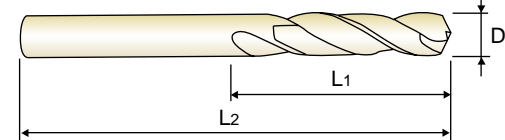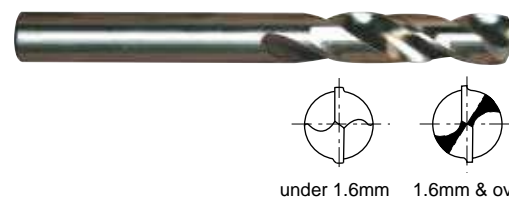

DIN 1897 HSS Co8 33° h8 135° P.276-277

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2107993	9.35	40	84	D2107138	13.8	54	107
D2107094	9.4	40	84	D2107140	14.0	54	107
D2107095	9.5	40	84	D2107842	14.25	56	111
D2107096	9.6	43	89	D2107145	14.5	56	111
D2107097	9.7	43	89	D2107847	14.75	56	111
D2107997	9.75	43	89	D2107150	15.0	56	111
D2107098	9.8	43	89	D2107852	15.25	58	115
D2107099	9.9	43	89	D2107155	15.5	58	115
D2107100	10.0	43	89	D2107857	15.75	58	115
D2107102	10.2	43	89	D2107160	16.0	58	115
D2107802	10.25	43	89	D2107862	16.25	60	119
D2107105	10.5	43	89	D2107165	16.5	60	119
D2107807	10.75	47	95	D2107867	16.75	60	119
D2107110	11.0	47	95	D2107170	17.0	60	119
D2107812	11.25	47	95	D2107872	17.25	62	123
D2107115	11.5	47	95	D2107175	17.5	62	123
D2107817	11.75	47	95	D2107877	17.75	62	123
D2107118	11.8	47	95	D2107180	18.0	62	123
D2107120	12.0	51	102	D2107882	18.25	64	127
D2107822	12.25	51	102	D2107185	18.5	64	127
D2107125	12.5	51	102	D2107887	18.75	64	127
D2107827	12.75	51	102	D2107190	19.0	64	127
D2107130	13.0	51	102	D2107892	19.25	66	131
D2107832	13.25	54	107	D2107195	19.5	66	131
D2107135	13.5	54	107	D2107897	19.75	66	131
D2107837	13.75	54	107	D2107200	20.0	66	131

▶ HSS-E(DL107) is available on your request.
▶ TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P									M					K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	55	60	42	55	55	60	42	55	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS



STUB

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

▶ **Surface treatment** : Coloring(Gold color)
▶ **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

▶ **Oberflächenbehandlung** : Coloring(Goldfarbe)
▶ **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

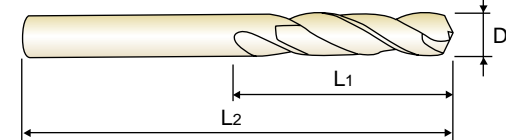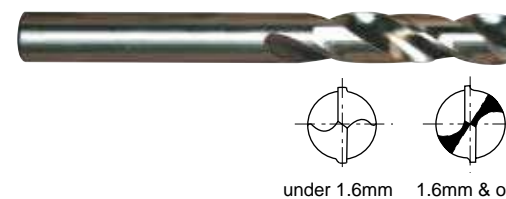

DIN 1897 HSS Co8 33° h8 135° P.276-277

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2107205	20.5	68	136	D2107245	24.5	75	151
D2107210	21.0	68	136	D2107250	25.0	75	151
D2107215	21.5	70	141	D2107260	26.0	78	156
D2107220	22.0	70	141	D2107270	27.0	81	162
D2107225	22.5	72	146	D2107280	28.0	81	162
D2107230	23.0	72	146	D2107290	29.0	84	168
D2107235	23.5	72	146	D2107300	30.0	84	168
D2107240	24.0	75	151	D2107310	31.0	87	174

▶ HSS-E(DL107) is available on your request.
▶ TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

◎ : Excellent ○ : Good

ISO	P									M					K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	55	60	42	55	55	60	42	55	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D1107 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

STUB

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm

► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm

► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

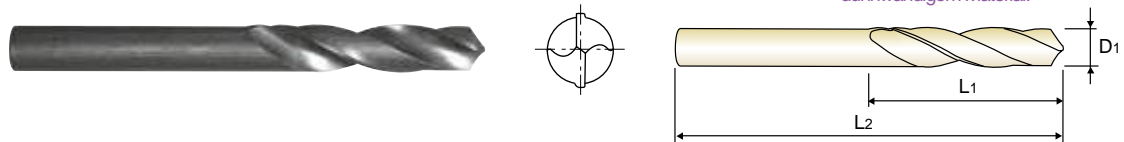

EDP No.	Drill Diameter		Flute Length		Overall Length			
	D1	L1	L1	L2	D1	L1	L2	
D1107010	1.0	6	6	26	D1107032	3.2	18	49
D1107011	1.1	7	7	28	D1107033	3.25	18	49
D1107012	1.2	8	8	30	D1107034	3.3	18	49
D1107912	1.25	8	8	30	D1107035	3.4	20	52
D1107013	1.3	8	8	30	D1107036	3.5	20	52
D1107014	1.4	9	9	32	D1107037	3.6	20	52
D1107015	1.5	9	9	32	D1107038	3.7	20	52
D1107016	1.6	9	9	34	D1107039	3.75	20	52
D1107017	1.7	10	10	34	D1107040	3.8	22	55
D1107917	1.75	11	11	36	D1107041	3.9	22	55
D1107018	1.8	11	11	36	D1107042	4.0	22	55
D1107019	1.9	11	11	36	D1107043	4.1	22	55
D1107020	2.0	12	12	38	D1107044	4.2	22	55
D1107021	2.1	12	12	38	D1107045	4.25	22	55
D1107022	2.2	13	13	40	D1107046	4.3	24	58
D1107922	2.25	13	13	40	D1107047	4.3	24	58
D1107023	2.3	13	13	40	D1107048	4.4	24	58
D1107024	2.4	14	14	43	D1107049	4.4	24	58
D1107025	2.5	14	14	43	D1107050	4.5	24	58
D1107026	2.6	14	14	43	D1107051	4.6	24	58
D1107027	2.7	16	16	46	D1107052	4.7	24	58
D1107927	2.75	16	16	46	D1107053	4.75	24	58
D1107028	2.8	16	16	46	D1107054	4.8	26	62
D1107029	2.9	16	16	46	D1107055	4.8	26	62
D1107030	3.0	16	16	46	D1107056	4.9	26	62
D1107031	3.1	18	18	49	D1107057	4.9	26	62
					D1107058	5.0	26	62
					D1107059	5.1	26	62
					D1107060	5.2	26	62
					D1107061	5.2	26	62
					D1107062	5.25	26	62

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○																		

YG STRAIGHT SHANK DRILLS

D1107 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

STUB

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)

► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)

► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

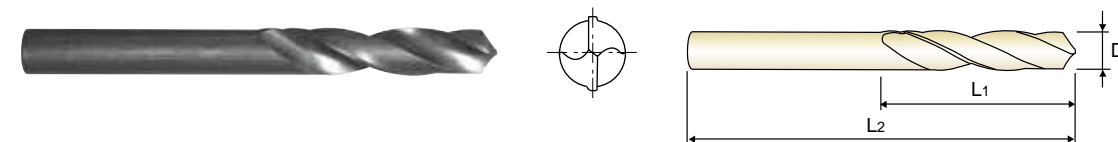

EDP No.	Drill Diameter		Flute Length		Overall Length			
	D1	L1	L1	L2	D1	L1	L2	
D1107053	5.3	26	26	62	D1107075	7.5	34	74
D1107054	5.4	28	28	66	D1107076	7.6	37	79
D1107055	5.5	28	28	66	D1107077	7.7	37	79
D1107056	5.6	28	28	66	D1107977	7.75	37	79
D1107057	5.7	28	28	66	D1107078	7.8	37	79
D1107957	5.75	28	28	66	D1107079	7.9	37	79
D1107058	5.8	28	28	66	D1107080	8.0	37	79
D1107059	5.9	28	28	66	D1107081	8.1	37	79
D1107060	6.0	28	28	66	D1107082	8.2	37	79
D1107061	6.1	31	31	70	D1107982	8.25	37	79
D1107062	6.2	31	31	70	D1107083	8.3	37	79
D1107962	6.25	31	31	70	D1107084	8.4	37	79
D1107063	6.3	31	31	70	D1107085	8.5	37	79
D1107064	6.4	31	31	70	D1107086	8.6	40	84
D1107065	6.5	31	31	70	D1107087	8.7	40	84
D1107066	6.6	31	31	70	D1107987	8.75	40	84
D1107067	6.7	31	31	70	D1107088	8.8	40	84
D1107967	6.75	34	34	74	D1107089	8.9	40	84
D1107068	6.8	34	34	74	D1107090	9.0	40	84
D1107069	6.9	34	34	74	D1107091	9.1	40	84
D1107070	7.0	34	34	74	D1107092	9.2	40	84
D1107071	7.1	34	34	74	D1107992	9.25	40	84
D1107072	7.2	34	34	74	D1107093	9.3	40	84
D1107972	7.25	34	34	74	D1107094	9.4	40	84
D1107073	7.3	34	34	74	D1107095	9.5	40	84
D1107074	7.4	34	34	74	D1107096	9.6	43	89

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○																		

YG STRAIGHT SHANK DRILLS

D1107 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


STUB

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série extra-courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
► **Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
► **Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken.
Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.

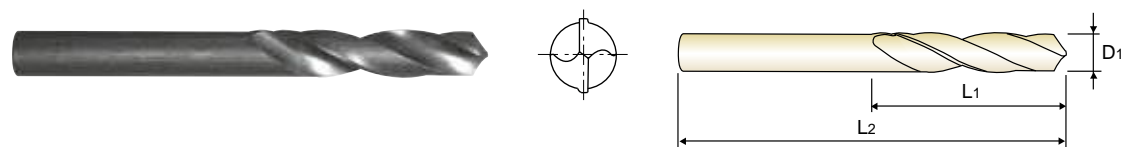

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
D1107097	9.7	43	89						
D1107997	9.75	43	89						
D1107098	9.8	43	89						
D1107099	9.9	43	89						
D1107100	10.0	43	89						
D1107802	10.25	43	89						
D1107105	10.5	43	89						
D1107807	10.75	47	95						
D1107110	11.0	47	95						
D1107812	11.25	47	95						
D1107115	11.5	47	95						
D1107817	11.75	47	95						
D1107120	12.0	51	102						
D1107822	12.25	51	102						
D1107125	12.5	51	102						
D1107827	12.75	51	102						
D1107130	13.0	51	102						

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D2105 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

KURZ
COURTE
CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspannbaren Werkstoffen wie Titan und Inconel.

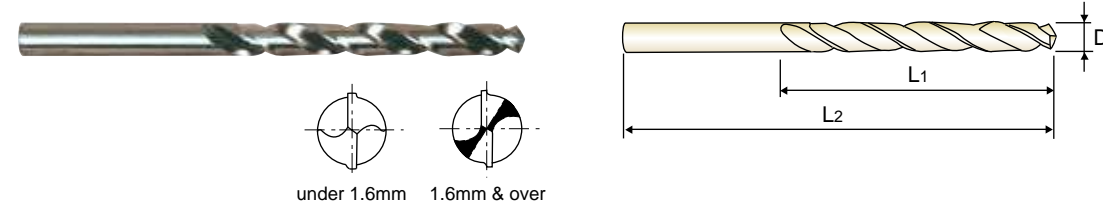

EDP No.	Drill Diameter			Flute Length			Overall Length		
	D1	L1	L2	D1	L1	L2	D1	L1	L2
D2105010	1.0	12	34						
D2105011	1.1	14	36						
D2105012	1.2	16	38						
D2105912	1.25	16	38						
D2105013	1.3	16	38						
D2105014	1.4	18	40						
D2105015	1.5	18	40						
D2105016	1.6	20	43						
D2105017	1.7	20	43						
D2105917	1.75	22	46						
D2105018	1.8	22	46						
D2105019	1.9	22	46						
D2105020	2.0	24	49						
D2105021	2.1	24	49						
D2105022	2.2	27	53						
D2105922	2.25	27	53						
D2105023	2.3	27	53						
D2105024	2.4	30	57						
D2105025	2.5	30	57						
D2105026	2.6	30	57						
D2105027	2.7	33	61						
D2105927	2.75	33	61						
D2105028	2.8	33	61						
D2105029	2.9	33	61						
D2105030	3.0	33	61						
D2105031	3.1	36	65						
D2105032	3.2	36	65						
D2105932	3.25	36	65						
D2105033	3.3	36	65						
D2105034	3.4	39	70						
D2105035	3.5	39	70						
D2105036	3.6	39	70						
D2105037	3.7	39	70						
D2105937	3.75	39	70						
D2105038	3.8	43	75						
D2105039	3.9	43	75						
D2105040	4.0	43	75						
D2105041	4.1	43	75						
D2105042	4.2	43	75						
D2105942	4.25	43	75						
D2105043	4.3	47	80						
D2105044	4.4	47	80						
D2105045	4.5	47	80						
D2105046	4.6	47	80						
D2105047	4.7	47	80						
D2105947	4.75	47	80						
D2105048	4.8	52	86						
D2105049	4.9	52	86						
D2105050	5.0	52	86						
D2105051	5.1	52	86						
D2105052	5.2	52	86						
D2105952	5.25	52	86						

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D2105 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS



JOBBER

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

- KURZ
- COURTE
- CORTA

► **Surface treatment** : Coloring(Gold color)
 ► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
 ► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

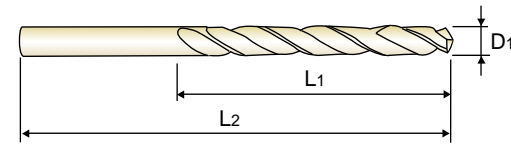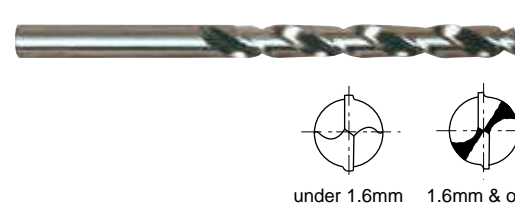

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2105053	5.3	52	86	D2105075	7.5	69	109
D2105054	5.4	57	93	D2105076	7.6	75	117
D2105055	5.5	57	93	D2105077	7.7	75	117
D2105056	5.6	57	93	D2105078	7.8	75	117
D2105057	5.7	57	93	D2105079	7.9	75	117
D2105058	5.8	57	93	D2105080	8.0	75	117
D2105059	5.9	57	93	D2105081	8.1	75	117
D2105060	6.0	57	93	D2105082	8.2	75	117
D2105061	6.1	63	101	D2105083	8.3	75	117
D2105062	6.2	63	101	D2105084	8.4	75	117
D2105063	6.3	63	101	D2105085	8.5	75	117
D2105064	6.4	63	101	D2105086	8.6	81	125
D2105065	6.5	63	101	D2105087	8.7	81	125
D2105066	6.6	63	101	D2105088	8.8	81	125
D2105067	6.7	63	101	D2105089	8.9	81	125
D2105068	6.8	69	109	D2105090	9.0	81	125
D2105069	6.9	69	109	D2105091	9.1	81	125
D2105070	7.0	69	109	D2105092	9.2	81	125
D2105071	7.1	69	109	D2105093	9.3	81	125
D2105072	7.2	69	109	D2105094	9.4	81	125
D2105073	7.3	69	109	D2105095	9.5	81	125
D2105074	7.4	69	109	D2105096	9.6	87	133

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○			○					○					○		○			

YG STRAIGHT SHANK DRILLS

D2105 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS



JOBBER

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

- KURZ
- COURTE
- CORTA

► **Surface treatment** : Coloring(Gold color)
 ► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
 ► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

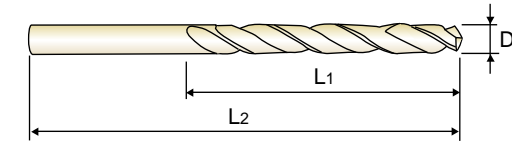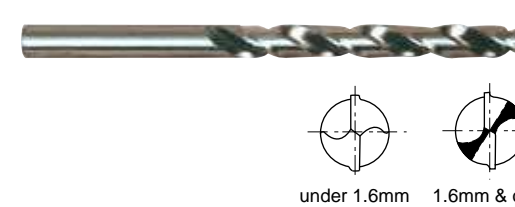

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2105097	9.7	87	133	D2105140	14.0	108	160
D2105097	9.75	87	133	D2105145	14.5	114	169
D2105098	9.8	87	133	D2105150	15.0	114	169
D2105099	9.9	87	133	D2105155	15.5	120	178
D2105100	10.0	87	133	D2105160	16.0	120	178
D2105102	10.2	87	133	D2105165	16.5	125	184
D2105105	10.5	87	133	D2105170	17.0	125	184
D2105110	11.0	94	142	D2105175	17.5	130	191
D2105115	11.5	94	142	D2105180	18.0	130	191
D2105120	12.0	101	151	D2105185	18.5	135	198
D2105125	12.5	101	151	D2105190	19.0	135	198
D2105130	13.0	101	151	D2105195	19.5	140	205
D2105135	13.5	108	160	D2105200	20.0	140	205

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○			○					○					○		○			

YG STRAIGHT SHANK DRILLS

DL105 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS



JOBBER

- HSS-E, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS - E

KURZ
COURTE
CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

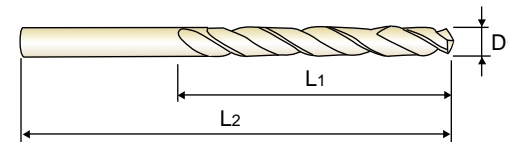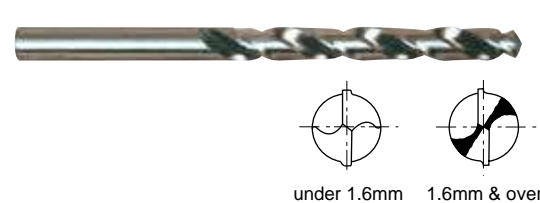

DIN 338 HSS-E 33° h8 135° P.276-277

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL105010	1.0	12	34	DL105032	3.2	36	65
DL105011	1.1	14	36	DL105033	3.25	36	65
DL105012	1.2	16	38	DL105034	3.3	36	65
DL105013	1.25	16	38	DL105035	3.4	39	70
DL105014	1.3	16	38	DL105036	3.5	39	70
DL105015	1.4	18	40	DL105037	3.6	39	70
DL105016	1.5	18	40	DL105038	3.7	39	70
DL105017	1.6	20	43	DL105039	3.75	39	70
DL105018	1.7	20	43	DL105040	3.8	43	75
DL105019	1.75	22	46	DL105041	3.9	43	75
DL105020	1.8	22	46	DL105042	4.0	43	75
DL105021	1.9	22	46	DL105043	4.1	43	75
DL105022	2.0	24	49	DL105044	4.2	43	75
DL105023	2.1	24	49	DL105045	4.25	43	75
DL105024	2.2	27	53	DL105046	4.3	47	80
DL105025	2.25	27	53	DL105047	4.3	47	80
DL105026	2.3	27	53	DL105048	4.4	47	80
DL105027	2.4	30	57	DL105049	4.4	47	80
DL105028	2.5	30	57	DL105050	4.5	47	80
DL105029	2.6	30	57	DL105051	4.6	47	80
DL105030	2.7	33	61	DL105052	4.7	47	80
DL105031	2.75	33	61	DL105053	4.75	47	80
	2.8	33	61	DL105054	4.8	52	86
	2.9	33	61	DL105055	4.8	52	86
	3.0	33	61	DL105056	4.9	52	86
	3.1	36	65	DL105057	5.0	52	86
				DL105058	5.1	52	86
				DL105059	5.2	52	86
				DL105060	5.2	52	86
				DL105061	5.25	52	86

► TiN(DN105), TiCN(DX105) and TiAlN(DT105) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○													○						

YG STRAIGHT SHANK DRILLS

DL105 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS



JOBBER

- HSS-E, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS - E

KURZ
COURTE
CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

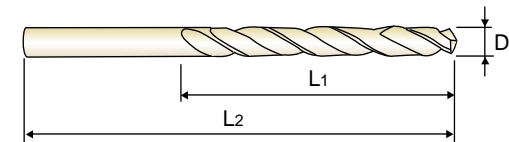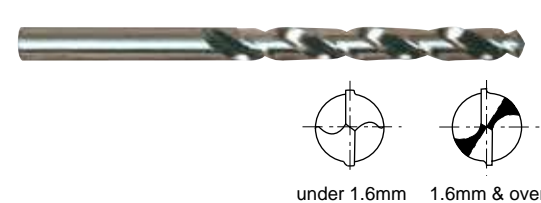

DIN 338 HSS-E 33° h8 135° P.276-277

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL105053	5.3	52	86	DL105075	7.5	69	109
DL105054	5.4	57	93	DL105076	7.6	75	117
DL105055	5.5	57	93	DL105077	7.7	75	117
DL105056	5.6	57	93	DL105078	7.8	75	117
DL105057	5.7	57	93	DL105079	7.9	75	117
DL105058	5.75	57	93	DL105080	8.0	75	117
DL105059	5.8	57	93	DL105081	8.1	75	117
DL105060	5.9	57	93	DL105082	8.2	75	117
DL105061	6.0	57	93	DL105083	8.25	75	117
DL105062	6.1	63	101	DL105084	8.3	75	117
DL105063	6.2	63	101	DL105085	8.4	75	117
DL105064	6.25	63	101	DL105086	8.5	75	117
DL105065	6.3	63	101	DL105087	8.6	81	125
DL105066	6.4	63	101	DL105088	8.7	81	125
DL105067	6.5	63	101	DL105089	8.8	81	125
DL105068	6.6	63	101	DL105090	8.9	81	125
DL105069	6.7	63	101	DL105091	9.0	81	125
DL105070	6.75	69	109	DL105092	9.1	81	125
DL105071	6.8	69	109	DL105093	9.2	81	125
DL105072	6.9	69	109	DL105094	9.3	81	125
DL105073	7.0	69	109	DL105095	9.4	81	125
DL105074	7.1	69	109	DL105096	9.5	81	125
	7.2	69	109		9.6	87	133
	7.25	69	109				
	7.3	69	109				
	7.4	69	109				

► TiN(DN105), TiCN(DX105) and TiAlN(DT105) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○													○						

YTG STRAIGHT SHANK DRILLS

DL105 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS



JOBBER

- HSS-E, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS - E

KURZ
COURTE
CORTA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

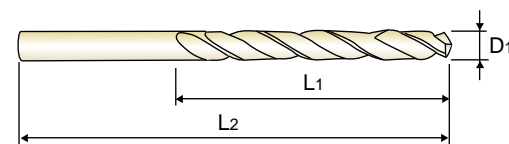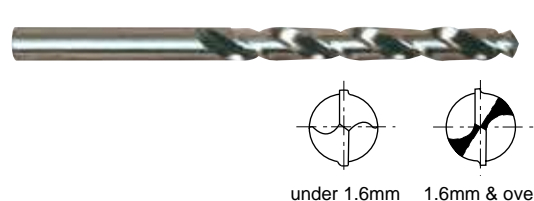

under 1.6mm 1.6mm & over



EDP No.	Drill Diameter		Flute Length		Overall Length	
	D1	D2	L1	L2	L1	L2
DL105097	9.7		87		133	
DL105997	9.75		87		133	
DL105098	9.8		87		133	
DL105099	9.9		87		133	
DL105100	10.0		87		133	
DL105102	10.2		87		133	
DL105105	10.5		87		133	
DL105110	11.0		94		142	
DL105115	11.5		94		142	
DL105120	12.0		101		151	
DL105125	12.5		101		151	
DL105130	13.0		101		151	
DL105135	13.5		108		160	
DL105140	14.0		108		160	
DL105145	14.5		114		169	
DL105150	15.0		114		169	
DL105155	15.5		120		178	
DL105160	16.0		120		178	
DL105165	16.5		125		184	
DL105170	17.0		125		184	
DL105175	17.5		130		191	
DL105180	18.0		130		191	
DL105185	18.5		135		198	
DL105190	19.0		135		198	
DL105195	19.5		140		205	
DL105200	20.0		140		205	

Unit : mm

► TiN(DN105), TiCN(DX105) and TiAlN(DT105) are available on your request.

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

YTG STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

KURZ
COURTE
CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
► **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm
► **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.

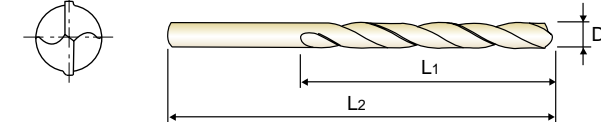

EDP No.	Drill Diameter		Flute Length		Overall Length	
	D1	D2	L1	L2	L1	L2
D1105003	0.3		3		19	
D1105004	0.4		5		20	
D1105005	0.5		6		22	
D1105006	0.6		7		24	
D1105007	0.7		9		28	
D1105008	0.8		10		30	
D1105009	0.9		11		32	
D1105010	1.0		12		34	
D1105910	1.05		12		34	
D1105011	1.1		14		36	
D1105911	1.15		14		36	
D1105012	1.2		16		38	
D1105912	1.25		16		38	
D1105013	1.3		16		38	
D1105913	1.35		18		40	
D1105014	1.4		18		40	
D1105914	1.45		18		40	
D1105015	1.5		18		40	
D1105915	1.55		20		43	
D1105016	1.6		20		43	
D1105916	1.65		20		43	
D1105017	1.7		20		43	
D1105917	1.75		22		46	
D1105018	1.8		22		46	
D1105918	1.85		22		46	
D1105019	1.9		22		46	
D1105919	1.95		24		49	
D1105020	2.0		24		49	
D1105920	2.05		24		49	
D1105021	2.1		24		49	
D1105921	2.15		27		53	
D1105022	2.2		27		53	
D1105922	2.25		27		53	
D1105023	2.3		27		53	
D1105923	2.35		27		53	
D1105024	2.4		30		57	
D1105924	2.45		30		57	
D1105025	2.5		30		57	
D1105925	2.55		30		57	
D1105026	2.6		30		57	
D1105926	2.65		30		57	
D1105027	2.7		33		61	
D1105927	2.75		33		61	
D1105028	2.8		33		61	
D1105928	2.85		33		61	
D1105029	2.9		33		61	
D1105929	2.95		33		61	
D1105030	3.0		33		61	
D1105930	3.05		36		65	
D1105031	3.1		36		65	
D1105931	3.15		36		65	
D1105032	3.2		36		65	

Unit : mm

► NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

YG STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


KURZ
COURTE
CORTA

Surface treatment : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm

Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

Oberflächenbehandlung : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm

Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphite.

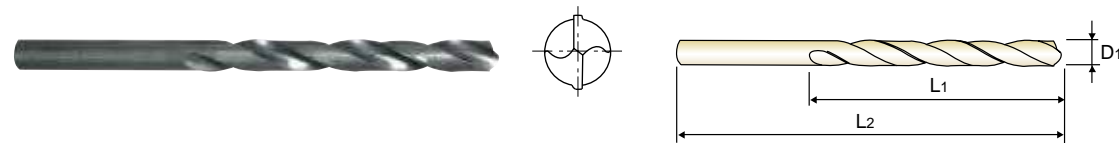

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105932	3.25	36	65	D1105945	4.55	47	80
D1105033	3.3	36	65	D1105046	4.6	47	80
D1105933	3.35	36	65	D1105946	4.65	47	80
D1105034	3.4	39	70	D1105047	4.7	47	80
D1105934	3.45	39	70	D1105947	4.75	47	80
D1105035	3.5	39	70	D1105048	4.8	52	86
D1105935	3.55	39	70	D1105948	4.85	52	86
D1105036	3.6	39	70	D1105049	4.9	52	86
D1105936	3.65	39	70	D1105949	4.95	52	86
D1105037	3.7	39	70	D1105050	5.0	52	86
D1105937	3.75	39	70	D1105950	5.05	52	86
D1105038	3.8	43	75	D1105051	5.1	52	86
D1105938	3.85	43	75	D1105951	5.15	52	86
D1105039	3.9	43	75	D1105052	5.2	52	86
D1105939	3.95	43	75	D1105952	5.25	52	86
D1105040	4.0	43	75	D1105053	5.3	52	86
D1105940	4.05	43	75	D1105953	5.35	57	93
D1105041	4.1	43	75	D1105054	5.4	57	93
D1105941	4.15	43	75	D1105954	5.45	57	93
D1105042	4.2	43	75	D1105055	5.5	57	93
D1105942	4.25	43	75	D1105955	5.55	57	93
D1105043	4.3	47	80	D1105056	5.6	57	93
D1105943	4.35	47	80	D1105956	5.65	57	93
D1105044	4.4	47	80	D1105057	5.7	57	93
D1105944	4.45	47	80	D1105957	5.75	57	93
D1105045	4.5	47	80	D1105058	5.8	57	93

▶ NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


KURZ
COURTE
CORTA

Surface treatment : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm

Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

Oberflächenbehandlung : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm

Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphite.

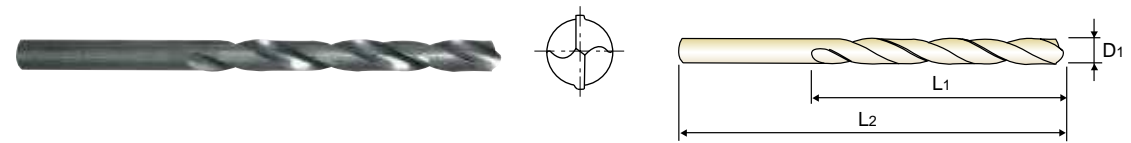

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105958	5.85	57	93	D1105971	7.15	69	109
D1105059	5.9	57	93	D1105072	7.2	69	109
D1105959	5.95	57	93	D1105972	7.25	69	109
D1105060	6.0	57	93	D1105073	7.3	69	109
D1105960	6.05	63	101	D1105973	7.35	69	109
D1105061	6.1	63	101	D1105074	7.4	69	109
D1105961	6.15	63	101	D1105974	7.45	69	109
D1105062	6.2	63	101	D1105075	7.5	69	109
D1105962	6.25	63	101	D1105975	7.55	75	117
D1105063	6.3	63	101	D1105076	7.6	75	117
D1105963	6.35	63	101	D1105976	7.65	75	117
D1105064	6.4	63	101	D1105077	7.7	75	117
D1105964	6.45	63	101	D1105977	7.75	75	117
D1105065	6.5	63	101	D1105078	7.8	75	117
D1105965	6.55	63	101	D1105978	7.85	75	117
D1105066	6.6	63	101	D1105079	7.9	75	117
D1105966	6.65	63	101	D1105979	7.95	75	117
D1105067	6.7	63	101	D1105080	8.0	75	117
D1105967	6.75	69	109	D1105081	8.1	75	117
D1105068	6.8	69	109	D1105082	8.2	75	117
D1105968	6.85	69	109	D1105982	8.25	75	117
D1105069	6.9	69	109	D1105083	8.3	75	117
D1105969	6.95	69	109	D1105084	8.4	75	117
D1105070	7.0	69	109	D1105085	8.5	75	117
D1105970	7.05	69	109	D1105086	8.6	81	125
D1105071	7.1	69	109	D1105087	8.7	81	125

▶ NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


- KURZ
- COURTE
- CORTA

Surface treatment : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm

Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

Oberflächenbehandlung : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm

Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphite.

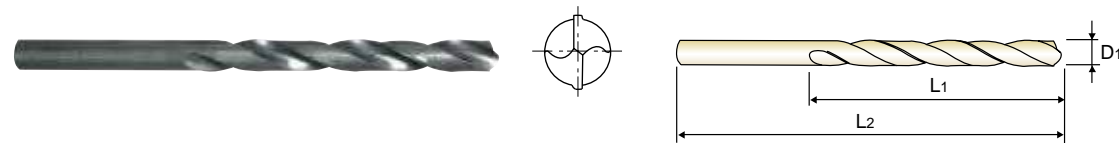

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1105987	8.75	81	125	D1105109	10.9	94	142
D1105088	8.8	81	125	D1105110	11.0	94	142
D1105089	8.9	81	125	D1105111	11.1	94	142
D1105090	9.0	81	125	D1105112	11.2	94	142
D1105091	9.1	81	125	D1105812	11.25	94	142
D1105092	9.2	81	125	D1105113	11.3	94	142
D1105992	9.25	81	125	D1105114	11.4	94	142
D1105093	9.3	81	125	D1105115	11.5	94	142
D1105094	9.4	81	125	D1105116	11.6	94	142
D1105095	9.5	81	125	D1105117	11.7	94	142
D1105096	9.6	87	133	D1105817	11.75	94	142
D1105097	9.7	87	133	D1105118	11.8	94	142
D1105997	9.75	87	133	D1105119	11.9	101	151
D1105098	9.8	87	133	D1105120	12.0	101	151
D1105099	9.9	87	133	D1105121	12.1	101	151
D1105100	10.0	87	133	D1105122	12.2	101	151
D1105101	10.1	87	133	D1105822	12.25	101	151
D1105102	10.2	87	133	D1105123	12.3	101	151
D1105802	10.25	87	133	D1105124	12.4	101	151
D1105103	10.3	87	133	D1105125	12.5	101	151
D1105104	10.4	87	133	D1105126	12.6	101	151
D1105105	10.5	87	133	D1105127	12.7	101	151
D1105106	10.6	87	133	D1105827	12.75	101	151
D1105107	10.7	94	142	D1105128	12.8	101	151
D1105807	10.75	94	142	D1105129	12.9	101	151
D1105108	10.8	94	142	D1105130	13.0	101	151

▶ NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


- KURZ
- COURTE
- CORTA

Surface treatment : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm

Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

Oberflächenbehandlung : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm

Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphite.

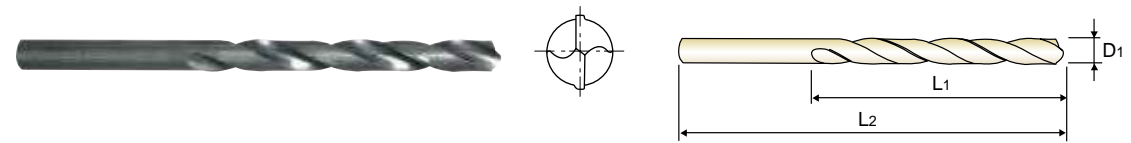

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1105832	13.25	108	160	D1105867	16.75	125	184
D1105135	13.5	108	160	D1105170	17.0	125	184
D1105837	13.75	108	160	D1105872	17.25	130	191
D1105140	14.0	108	160	D1105175	17.5	130	191
D1105842	14.25	114	169	D1105877	17.75	130	191
D1105145	14.5	114	169	D1105180	18.0	130	191
D1105847	14.75	114	169	D1105882	18.25	135	198
D1105150	15.0	114	169	D1105185	18.5	135	198
D1105852	15.25	120	178	D1105887	18.75	135	198
D1105155	15.5	120	178	D1105190	19.0	135	198
D1105857	15.75	120	178	D1105892	19.25	140	205
D1105160	16.0	120	178	D1105195	19.5	140	205
D1105862	16.25	125	184	D1105897	19.75	140	205
D1105165	16.5	125	184	D1105200	20.0	140	205

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					

YG STRAIGHT SHANK DRILLS

D1125 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

- KURZ
- COURTE
- CORTA

►Surface treatment : Bright Finish
 ►Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

►Oberflächenbehandlung : Helle Beschaffenheit
 ►Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.

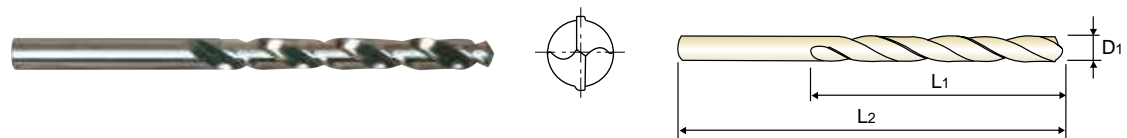

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1125020	2.0	24	49	D1125046	4.6	47	80
D1125021	2.1	24	49	D1125047	4.7	47	80
D1125022	2.2	27	53	D1125048	4.8	52	86
D1125023	2.3	27	53	D1125049	4.9	52	86
D1125024	2.4	30	57	D1125050	5.0	52	86
D1125025	2.5	30	57	D1125051	5.1	52	86
D1125026	2.6	30	57	D1125052	5.3	52	86
D1125027	2.7	33	61	D1125053	5.3	52	86
D1125028	2.8	33	61	D1125054	5.4	57	93
D1125029	2.9	33	61	D1125055	5.5	57	93
D1125030	3.0	33	61	D1125056	5.6	57	93
D1125031	3.1	36	65	D1125057	5.7	57	93
D1125032	3.2	36	65	D1125058	5.8	57	93
D1125033	3.3	36	65	D1125059	5.9	57	93
D1125034	3.4	39	70	D1125060	6.0	57	93
D1125035	3.5	39	70	D1125061	6.1	63	101
D1125036	3.6	39	70	D1125062	6.2	63	101
D1125037	3.7	39	70	D1125063	6.3	63	101
D1125038	3.8	43	75	D1125064	6.4	63	101
D1125039	3.9	43	75	D1125065	6.5	63	101
D1125040	4.0	43	75	D1125066	6.6	63	101
D1125041	4.1	43	75	D1125067	6.7	63	101
D1125042	4.2	43	75	D1125068	6.8	69	109
D1125043	4.3	47	80	D1125069	6.9	69	109
D1125044	4.4	47	80	D1125070	7.0	69	109
D1125045	4.5	47	80	D1125071	7.1	69	109

► NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	1050	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○													○					

YG STRAIGHT SHANK DRILLS

D1125 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

- KURZ
- COURTE
- CORTA

►Surface treatment : Bright Finish
 ►Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

►Oberflächenbehandlung : Helle Beschaffenheit
 ►Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.

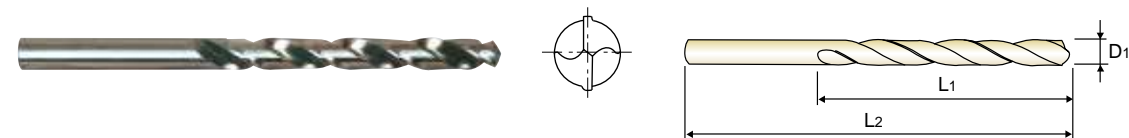

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1125072	7.2	69	109	D1125098	9.8	87	133
D1125073	7.3	69	109	D1125099	9.9	87	133
D1125074	7.4	69	109	D1125100	10.0	87	133
D1125075	7.5	69	109	D1125101	10.1	87	133
D1125076	7.6	75	117	D1125102	10.2	87	133
D1125077	7.7	75	117	D1125103	10.3	87	133
D1125078	7.8	75	117	D1125104	10.4	87	133
D1125079	7.9	75	117	D1125105	10.5	87	133
D1125080	8.0	75	117	D1125106	10.6	87	133
D1125081	8.1	75	117	D1125107	10.7	94	142
D1125082	8.2	75	117	D1125108	10.8	94	142
D1125083	8.3	75	117	D1125109	10.9	94	142
D1125084	8.4	75	117	D1125110	11.0	94	142
D1125085	8.5	75	117	D1125111	11.1	94	142
D1125086	8.6	81	125	D1125112	11.2	94	142
D1125087	8.7	81	125	D1125113	11.3	94	142
D1125088	8.8	81	125	D1125114	11.4	94	142
D1125089	8.9	81	125	D1125115	11.5	94	142
D1125090	9.0	81	125	D1125116	11.6	94	142
D1125091	9.1	81	125	D1125117	11.7	94	142
D1125092	9.2	81	125	D1125118	11.8	94	142
D1125093	9.3	81	125	D1125119	11.9	101	151
D1125094	9.4	81	125	D1125120	12.0	101	151
D1125095	9.5	81	125	D1125121	12.1	101	151
D1125096	9.6	87	133	D1125122	12.2	101	151
D1125097	9.7	87	133	D1125123	12.3	101	151

► NEXT PAGE

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	1050	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○													○					

YG STRAIGHT SHANK DRILLS

D1125 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

- KURZ
- COURTE
- CORTA

►Surface treatment : Bright Finish
 ►Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

►Oberflächenbehandlung : Helle Beschaffenheit
 ►Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphärguß, Sinterisen, Graphite.

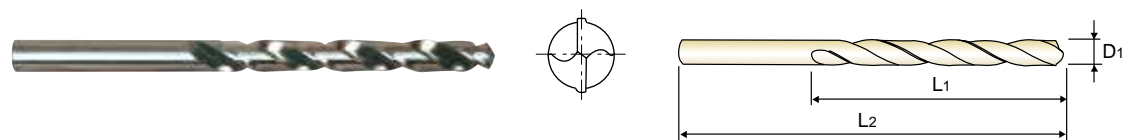

DIN 338 HSS N 20~30° h8 118° P.276-277

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1125124	12.4	101	151	D1125150	15.0	114	169
D1125125	12.5	101	151	D1125155	15.5	120	178
D1125126	12.6	101	151	D1125160	16.0	120	178
D1125127	12.7	101	151	D1125165	16.5	125	184
D1125128	12.8	101	151	D1125170	17.0	125	184
D1125129	12.9	101	151	D1125175	17.5	130	191
D1125130	13.0	101	151	D1125180	18.0	130	191
D1125132	13.2	101	151	D1125185	18.5	135	198
D1125133	13.3	108	160	D1125190	19.0	135	198
D1125135	13.5	108	160	D1125195	19.5	140	205
D1125140	14.0	108	160	D1125200	20.0	140	205
D1125145	14.5	114	169				

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○					○					

YG STRAIGHT SHANK DRILLS

D2104 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS


LONG

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, série longue
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

- LANG
- LONGUE
- LUNGA

►Surface treatment : Coloring(Gold color)
 ►Application : Drilling deep holes in stainless steels and difficult - to - cut materials such as titanium and inconel.

►Oberflächenbehandlung : Coloring(Goldfarbe)
 ►Verwendung : Für Bohrarbeiten mit Bohrungen oder an tief liegenden Stellen. Zum Bohren von rostfreien und austenitischen Stählen, schwererspanbaren Werkstoffen wie Titan und Inconel.

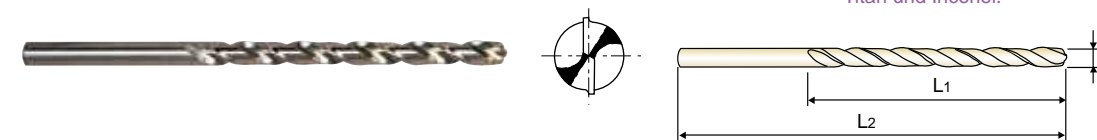

DIN 340 HSS Co8 33° h8 135° P.276-277

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2104020	2.0	56	85	D2104046	4.6	82	126
D2104021	2.1	56	85	D2104047	4.7	82	126
D2104022	2.2	59	90	D2104048	4.8	87	132
D2104023	2.3	59	90	D2104049	4.9	87	132
D2104024	2.4	62	95	D2104050	5.0	87	132
D2104025	2.5	62	95	D2104051	5.1	87	132
D2104026	2.6	62	95	D2104052	5.2	87	132
D2104027	2.7	66	100	D2104053	5.3	87	132
D2104028	2.8	66	100	D2104054	5.4	91	139
D2104029	2.9	66	100	D2104055	5.5	91	139
D2104030	3.0	66	100	D2104056	5.6	91	139
D2104031	3.1	69	106	D2104057	5.7	91	139
D2104032	3.2	69	106	D2104058	5.8	91	139
D2104033	3.3	69	106	D2104059	5.9	91	139
D2104034	3.4	73	112	D2104060	6.0	91	139
D2104035	3.5	73	112	D2104061	6.1	97	148
D2104036	3.6	73	112	D2104062	6.2	97	148
D2104037	3.7	73	112	D2104063	6.3	97	148
D2104038	3.8	78	119	D2104064	6.4	97	148
D2104039	3.9	78	119	D2104065	6.5	97	148
D2104040	4.0	78	119	D2104066	6.6	97	148
D2104041	4.1	78	119	D2104067	6.7	97	148
D2104042	4.2	78	119	D2104068	6.8	102	156
D2104043	4.3	82	126	D2104069	6.9	102	156
D2104044	4.4	82	126	D2104070	7.0	102	156
D2104045	4.5	82	126	D2104071	7.1	102	156

► HSS-E(DL104) is available on your request.
 ► TiN(D4104), TiCN(D7104) and TiAlN(DQ104) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○					○					

YG STRAIGHT SHANK DRILLS

D2104 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS


LONG

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, série longue
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

LANG
LONGUE
LUNGA

► **Surface treatment** : Coloring(Gold color)
► **Application** : Drilling deep holes in stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)
► **Verwendung** : Für Bohrarbeiten mit Bohrbuchsen oder an tief liegenden Stellen. Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

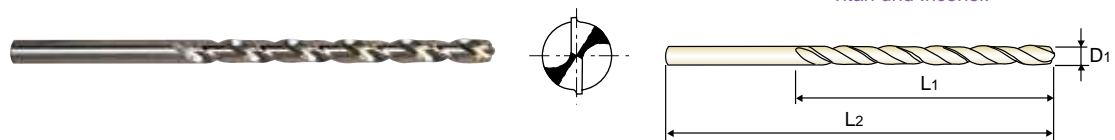

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D2104072	7.2	102	156	D2104091	9.1	115	175
D2104073	7.3	102	156	D2104092	9.2	115	175
D2104074	7.4	102	156	D2104093	9.3	115	175
D2104075	7.5	102	156	D2104094	9.4	115	175
D2104076	7.6	109	165	D2104095	9.5	115	175
D2104077	7.7	109	165	D2104096	9.6	121	184
D2104078	7.8	109	165	D2104097	9.7	121	184
D2104079	7.9	109	165	D2104098	9.8	121	184
D2104080	8.0	109	165	D2104099	9.9	121	184
D2104081	8.1	109	165	D2104100	10.0	121	184
D2104082	8.2	109	165	D2104102	10.2	121	184
D2104083	8.3	109	165	D2104105	10.5	121	184
D2104084	8.4	109	165	D2104108	10.8	128	195
D2104085	8.5	109	165	D2104110	11.0	128	195
D2104086	8.6	115	175	D2104112	11.2	128	195
D2104087	8.7	115	175	D2104115	11.5	128	195
D2104088	8.8	115	175	D2104118	11.8	128	195
D2104089	8.9	115	175	D2104120	12.0	134	205
D2104090	9.0	115	175				

► HSS-E(DL104) is available on your request.
► TiN(D4104), TiCN(D7104) and TiAlN(DQ104) are available on your request.

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	42	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○													○					

YG STRAIGHT SHANK DRILLS

D1121 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


EXTRA LONG

- HSS, SPIRALBOHRER MIT ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série extra-longue
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

ÜBERLANG
EXTRA-LONGUE
EXTRA LUNGA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
► **Application** : Designed for drilling deep holes or deeply located holes. Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
► **Verwendung** : Standardbohrer zum Bohren extrem tiefer Löcher, zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphit.

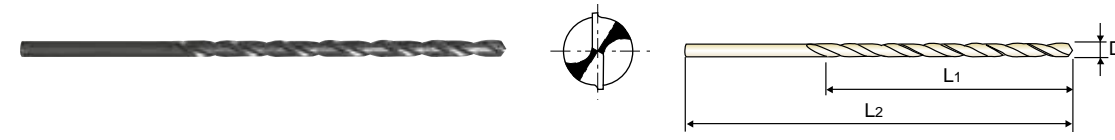

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1121020	2.0	85	125	D1121080	8.0	165	240
D1121025	2.5	95	140	D1121085	8.5	165	240
D1121030	3.0	100	150	D1121090	9.0	175	250
D1121035	3.5	115	165	D1121095	9.5	175	250
D1121040	4.0	120	175	D1121100	10.0	185	265
D1121045	4.5	125	185	D1121105	10.5	185	265
D1121050	5.0	135	195	D1121110	11.0	195	280
D1121055	5.5	140	205	D1121115	11.5	195	280
D1121060	6.0	140	205	D1121120	12.0	205	295
D1121065	6.5	150	215	D1121125	12.5	205	295
D1121070	7.0	155	225	D1121130	13.0	205	295
D1121075	7.5	155	225				

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	42	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○													○					


YMG STRAIGHT SHANK DRILLS

DL109 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for HEAVY DUTY JOBBER

● HSS-E, SPIRALBOHRER für HOHE LEISTUNGEN mit ZYLINDERSCHAFT KURZ
● Forets HSS-E, queue cylindrique pour matériaux durs, série courte COURTE
● PUNTE ELICOIDALI PER IMPIEGHI GRAVOSI, GAMBO CILINDRICO, HSS - E CORTA

►Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.
►Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphit.

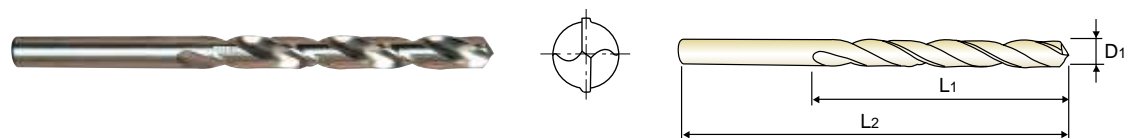

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
DL109015	1.5	18	40	DL109967	6.75	69	109
DL109917	1.75	22	46	DL109070	7.0	69	109
DL109020	2.0	24	49	DL109972	7.25	69	109
DL109922	2.25	27	53	DL109075	7.5	69	109
DL109025	2.5	30	57	DL109977	7.75	75	117
DL109927	2.75	33	61	DL109080	8.0	75	117
DL109030	3.0	33	61	DL109982	8.25	75	117
DL109932	3.25	36	65	DL109085	8.5	75	117
DL109035	3.5	39	70	DL109987	8.75	81	125
DL109937	3.75	39	70	DL109090	9.0	81	125
DL109040	4.0	43	75	DL109992	9.25	81	125
DL109942	4.25	43	75	DL109095	9.5	81	125
DL109045	4.5	47	80	DL109997	9.75	87	133
DL109947	4.75	47	80	DL109100	10.0	87	133
DL109050	5.0	52	86	DL109105	10.5	87	133
DL109952	5.25	52	86	DL109110	11.0	94	142
DL109055	5.5	57	93	DL109115	11.5	94	142
DL109957	5.75	57	93	DL109120	12.0	101	151
DL109060	6.0	57	93	DL109125	12.5	101	151
DL109962	6.25	63	101	DL109130	13.0	101	151
DL109065	6.5	63	101				

► TiN(DN109), TiCN(DX109) and TiAlN(DT109) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					


YMG STRAIGHT SHANK DRILLS

D1100 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for BRASS/BRONZE JOBBER

● HSS, SPIRALBOHRER für MESSING/BRONZE mit ZYLINDERSCHAFT KURZ
● Forets HSS, queue cylindrique pour Laiton/Bronze, série courte COURTE
● PUNTE ELICOIDALI, GAMBO CILINDRICO PER OTTONE (HSS) CORTA

►Application : Drilling hard, brittle and short-chip materials. i.e., brass, bronze, phosphor bronze and magnesium alloys.
►Verwendung : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.

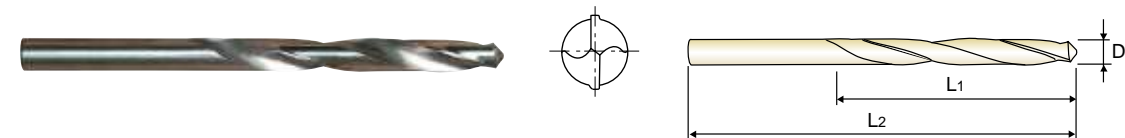

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1100015	1.5	18	40	D1100041	4.1	43	75
D1100016	1.6	20	43	D1100042	4.2	43	75
D1100017	1.7	20	43	D1100043	4.3	47	80
D1100018	1.8	22	46	D1100044	4.4	47	80
D1100019	1.9	22	46	D1100045	4.5	47	80
D1100020	2.0	24	49	D1100046	4.6	47	80
D1100021	2.1	24	49	D1100047	4.7	47	80
D1100022	2.2	27	53	D1100048	4.8	52	86
D1100023	2.3	27	53	D1100049	4.9	52	86
D1100024	2.4	30	57	D1100050	5.0	52	86
D1100025	2.5	30	57	D1100051	5.1	52	86
D1100026	2.6	30	57	D1100052	5.2	52	86
D1100027	2.7	33	61	D1100053	5.3	52	86
D1100028	2.8	33	61	D1100054	5.4	57	93
D1100029	2.9	33	61	D1100055	5.5	57	93
D1100030	3.0	33	61	D1100056	5.6	57	93
D1100031	3.1	36	65	D1100057	5.7	57	93
D1100032	3.2	36	65	D1100058	5.8	57	93
D1100033	3.3	36	65	D1100059	5.9	57	93
D1100034	3.4	39	70	D1100060	6.0	57	93
D1100035	3.5	39	70	D1100061	6.1	63	101
D1100036	3.6	39	70	D1100062	6.2	63	101
D1100037	3.7	39	70	D1100063	6.3	63	101
D1100038	3.8	43	75	D1100064	6.4	63	101
D1100039	3.9	43	75	D1100065	6.5	63	101
D1100040	4.0	43	75	D1100066	6.6	63	101

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					


YTG STRAIGHT SHANK DRILLS

D1100 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for BRASS/BRONZE JOBBER

- HSS, SPIRALBOHRER für MESSING/BRONZE mit ZYLINDERSCHAFT KURZ
- Forets HSS, queue cylindrique pour Laiton/Bronze, série courte COURTE
- PUNTE ELICOIDALI, GAMBO CILINDRICO PER OTTONE (HSS) CORTA

►Application : Drilling hard, brittle and short-chip materials. i.e., brass, bronze, phosphor bronze and magnesium alloys. ►Verwendung : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.

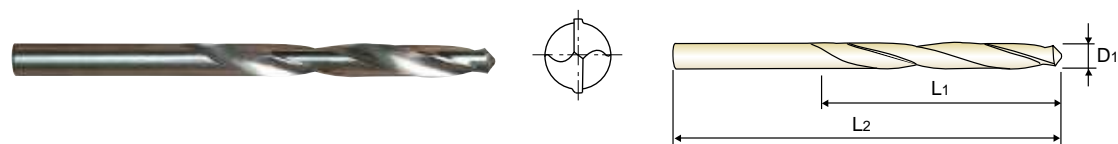

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1100067	6.7	63	101	D1100087	8.7	81	125
D1100068	6.8	69	109	D1100088	8.8	81	125
D1100069	6.9	69	109	D1100089	8.9	81	125
D1100070	7.0	69	109	D1100090	9.0	81	125
D1100071	7.1	69	109	D1100091	9.1	81	125
D1100072	7.2	69	109	D1100092	9.2	81	125
D1100073	7.3	69	109	D1100093	9.3	81	125
D1100074	7.4	69	109	D1100094	9.4	81	125
D1100075	7.5	69	109	D1100095	9.5	81	125
D1100076	7.6	75	117	D1100096	9.6	87	133
D1100077	7.7	75	117	D1100097	9.7	87	133
D1100078	7.8	75	117	D1100098	9.8	87	133
D1100079	7.9	75	117	D1100099	9.9	87	133
D1100080	8.0	75	117	D1100100	10.0	87	133
D1100081	8.1	75	117	D1100105	10.5	87	133
D1100082	8.2	75	117	D1100110	11.0	94	142
D1100083	8.3	75	117	D1100115	11.5	94	142
D1100084	8.4	75	117	D1100120	12.0	101	151
D1100085	8.5	75	117	D1100125	12.5	101	151
D1100086	8.6	81	125	D1100130	13.0	101	151

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended																						


YTG STRAIGHT SHANK DRILLS

D1106 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for ALUMINUM JOBBER

- HSS, SPIRALBOHRER für ALUMINIUM mit ZYLINDERSCHAFT KURZ
- Forets HSS, queue cylindrique pour ALU, Forme C, série courte COURTE
- PUNTE ELICOIDALI, GAMBO CILINDRICO, PER ALLUMINIO (HSS) CORTA

►Application : Drilling hard, brittle and short-chip materials. i.e., brass, bronze, phosphor bronze aluminum and magnesium alloys. ►Verwendung : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.

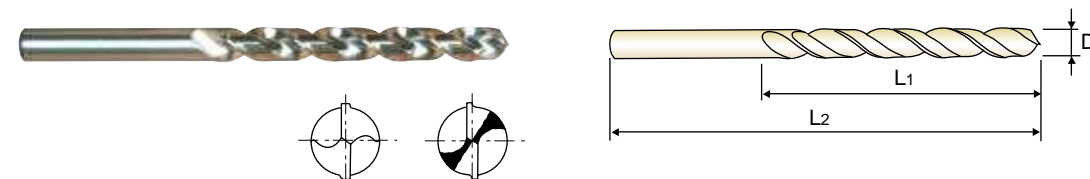

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1106015	1.5	18	40	D1106041	4.1	43	75
D1106016	1.6	20	43	D1106042	4.2	43	75
D1106017	1.7	20	43	D1106043	4.3	47	80
D1106018	1.8	22	46	D1106044	4.4	47	80
D1106019	1.9	22	46	D1106045	4.5	47	80
D1106020	2.0	24	49	D1106046	4.6	47	80
D1106021	2.1	24	49	D1106047	4.7	47	80
D1106022	2.2	27	53	D1106048	4.8	52	86
D1106023	2.3	27	53	D1106049	4.9	52	86
D1106024	2.4	30	57	D1106050	5.0	52	86
D1106025	2.5	30	57	D1106051	5.1	52	86
D1106026	2.6	30	57	D1106052	5.2	52	86
D1106027	2.7	33	61	D1106053	5.3	52	86
D1106028	2.8	33	61	D1106054	5.4	57	93
D1106029	2.9	33	61	D1106055	5.5	57	93
D1106030	3.0	33	61	D1106056	5.6	57	93
D1106031	3.1	36	65	D1106057	5.7	57	93
D1106032	3.2	36	65	D1106058	5.8	57	93
D1106033	3.3	36	65	D1106059	5.9	57	93
D1106034	3.4	39	70	D1106060	6.0	57	93
D1106035	3.5	39	70	D1106061	6.1	63	101
D1106036	3.6	39	70	D1106062	6.2	63	101
D1106037	3.7	39	70	D1106063	6.3	63	101
D1106038	3.8	43	75	D1106064	6.4	63	101
D1106039	3.9	43	75	D1106065	6.5	63	101
D1106040	4.0	43	75	D1106066	6.6	63	101

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended																						

YG STRAIGHT SHANK DRILLS

D1106 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for ALUMINUM


JOBBER

- HSS, SPIRALBOHRER für ALUMINIUM mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique pour ALU, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, PER ALLUMINIO (HSS)

KURZ
COURTE
CORTA

►Application : Drilling hard, brittle and short-chip materials. i.e., brass, bronze, phosphor bronze aluminum and magnesium alloys.

►Verwendung : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.

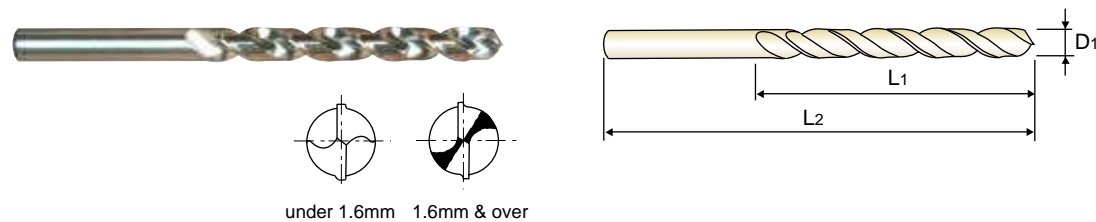

under 1.6mm 1.6mm & over



Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
D1106067	6.7	63	101	D1106087	8.7	81	125
D1106068	6.8	69	109	D1106088	8.8	81	125
D1106069	6.9	69	109	D1106089	8.9	81	125
D1106070	7.0	69	109	D1106090	9.0	81	125
D1106071	7.1	69	109	D1106091	9.1	81	125
D1106072	7.2	69	109	D1106092	9.2	81	125
D1106073	7.3	69	109	D1106093	9.3	81	125
D1106074	7.4	69	109	D1106094	9.4	81	125
D1106075	7.5	69	109	D1106095	9.5	81	125
D1106076	7.6	75	117	D1106096	9.6	87	133
D1106077	7.7	75	117	D1106097	9.7	87	133
D1106078	7.8	75	117	D1106098	9.8	87	133
D1106079	7.9	75	117	D1106099	9.9	87	133
D1106080	8.0	75	117	D1106100	10.0	87	133
D1106081	8.1	75	117	D1106105	10.5	87	133
D1106082	8.2	75	117	D1106110	11.0	94	142
D1106083	8.3	75	117	D1106115	11.5	94	142
D1106084	8.4	75	117	D1106120	12.0	101	151
D1106085	8.5	75	117	D1106125	12.5	101	151
D1106086	8.6	81	125	D1106130	13.0	101	151

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	630	40	42	55	55
HB	60	100	75	90	130	110	90	100			400 Rm	1050 Rm	550	630	400	550	630	40	42	55	55
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

YG STRAIGHT SHANK DRILLS

DL510 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES


STUB

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique pour perçage profond, série extra-courte
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP

EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

►Verwendung : Zum Bohren von legiertem und unlegiertem Stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

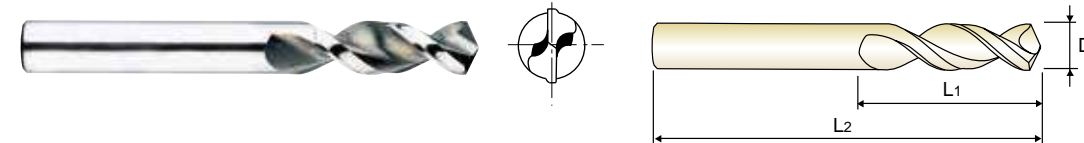

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL510020	2.0	12	38	DL510046	4.6	24	58
DL510021	2.1	12	38	DL510047	4.7	24	58
DL510022	2.2	13	40	DL510048	4.8	26	62
DL510023	2.3	13	40	DL510049	4.9	26	62
DL510024	2.4	14	43	DL510050	5.0	26	62
DL510025	2.5	14	43	DL510051	5.1	26	62
DL510026	2.6	14	43	DL510052	5.2	26	62
DL510027	2.7	16	46	DL510053	5.3	26	66
DL510028	2.8	16	46	DL510054	5.4	28	66
DL510029	2.9	16	46	DL510055	5.5	28	66
DL510030	3.0	16	46	DL510056	5.6	28	66
DL510031	3.1	18	49	DL510057	5.7	28	66
DL510032	3.2	18	49	DL510058	5.8	28	66
DL510033	3.3	18	49	DL510059	5.9	28	66
DL510034	3.4	20	52	DL510060	6.0	28	66
DL510035	3.5	20	52	DL510061	6.1	31	70
DL510036	3.6	20	52	DL510062	6.2	31	70
DL510037	3.7	20	52	DL510063	6.3	31	70
DL510038	3.8	22	55	DL510064	6.4	31	70
DL510039	3.9	22	55	DL510065	6.5	31	70
DL510040	4.0	22	55	DL510066	6.6	31	70
DL510041	4.1	22	55	DL510067	6.7	31	70
DL510042	4.2	22	55	DL510068	6.8	34	74
DL510043	4.3	24	58	DL510069	6.9	34	74
DL510044	4.4	24	58	DL510070	7.0	34	74
DL510045	4.5	24	58	DL510071	7.1	34	74

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	630	40	42	55	55
HB	60	100	75	90	130	110	90	100			400 Rm	1050 Rm	550	630	400	550	630	40	42	55	55
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

YG STRAIGHT SHANK DRILLS


DL510 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES STUB

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT EXTRA KURZ
- Forets HSS-E, queue cylindrique pour perçage profond, série extra-courte EXTRA-COURTE
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP EXTRA CORTA

►Application : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

►Verwendung : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

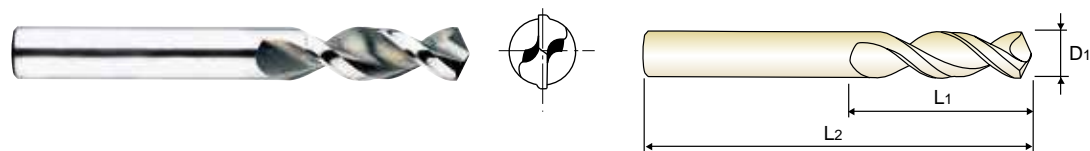

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL510072	7.2	34	74	DL510099	9.9	43	89
DL510073	7.3	34	74	DL510100	10.0	43	89
DL510074	7.4	34	74	DL510102	10.2	43	89
DL510075	7.5	34	74	DL510105	10.5	43	89
DL510076	7.6	37	79	DL510108	10.8	47	95
DL510077	7.7	37	79	DL510110	11.0	47	95
DL510078	7.8	37	79	DL510112	11.2	47	95
DL510079	7.9	37	79	DL510115	11.5	47	95
DL510080	8.0	37	79	DL510118	11.8	47	95
DL510081	8.1	37	79	DL510120	12.0	51	102
DL510082	8.2	37	79	DL510125	12.5	51	102
DL510083	8.3	37	79	DL510130	13.0	51	102
DL510084	8.4	37	79	DL510135	13.5	54	107
DL510085	8.5	37	79	DL510140	14.0	54	107
DL510086	8.6	40	84	DL510145	14.5	56	111
DL510087	8.7	40	84	DL510150	15.0	56	111
DL510088	8.8	40	84	DL510155	15.5	58	115
DL510089	8.9	40	84	DL510160	16.0	58	115
DL510090	9.0	40	84	DL510165	16.5	60	119
DL510091	9.1	40	84	DL510170	17.0	60	119
DL510092	9.2	40	84	DL510175	17.5	62	123
DL510093	9.3	40	84	DL510180	18.0	62	123
DL510094	9.4	40	84	DL510185	18.5	64	127
DL510095	9.5	40	84	DL510190	19.0	64	127
DL510096	9.6	43	89	DL510195	19.5	66	131
DL510097	9.7	43	89	DL510200	20.0	66	131
DL510098	9.8	43	89				

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

YG STRAIGHT SHANK DRILLS


DL508 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES JOBBER

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT KURZ
- Forets HSS-E, queue cylindrique pour perçage profond, série courte COURTE
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP CORTA

►Application : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

►Verwendung : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

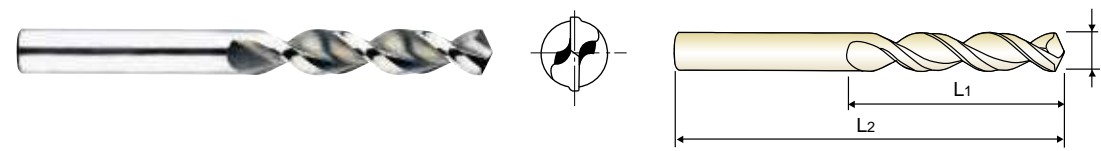

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL508020	2.0	24	49	DL508046	4.6	47	80
DL508021	2.1	24	49	DL508047	4.7	47	80
DL508022	2.2	27	53	DL508048	4.8	52	86
DL508023	2.3	27	53	DL508049	4.9	52	86
DL508024	2.4	30	57	DL508050	5.0	52	86
DL508025	2.5	30	57	DL508051	5.1	52	86
DL508026	2.6	30	57	DL508052	5.2	52	86
DL508027	2.7	33	61	DL508053	5.3	52	86
DL508028	2.8	33	61	DL508054	5.4	57	93
DL508029	2.9	33	61	DL508055	5.5	57	93
DL508030	3.0	33	61	DL508056	5.6	57	93
DL508031	3.1	36	65	DL508057	5.7	57	93
DL508032	3.2	36	65	DL508058	5.8	57	93
DL508033	3.3	36	65	DL508059	5.9	57	93
DL508034	3.4	39	70	DL508060	6.0	57	93
DL508035	3.5	39	70	DL508061	6.1	63	101
DL508036	3.6	39	70	DL508062	6.2	63	101
DL508037	3.7	39	70	DL508063	6.3	63	101
DL508038	3.8	43	75	DL508064	6.4	63	101
DL508039	3.9	43	75	DL508065	6.5	63	101
DL508040	4.0	43	75	DL508066	6.6	63	101
DL508041	4.1	43	75	DL508067	6.7	63	101
DL508042	4.2	43	75	DL508068	6.8	69	109
DL508043	4.3	47	80	DL508069	6.9	69	109
DL508044	4.4	47	80	DL508070	7.0	69	109
DL508045	4.5	47	80	DL508071	7.1	69	109

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					


YG STRAIGHT SHANK DRILLS

DL508 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES JOBBER

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT KURZ
- Forets HSS-E, queue cylindrique pour perçage profond, série courte COURTE
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP CORTA

► **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys. ► **Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

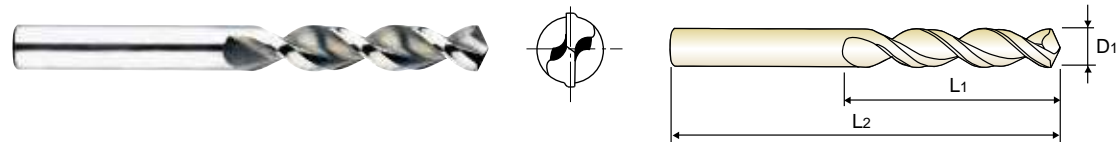

DIN 338 HSS-E 42° h8 130° P.280-281

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL508072	7.2	69	109	DL508094	9.4	81	125
DL508073	7.3	69	109	DL508095	9.5	81	125
DL508074	7.4	69	109	DL508096	9.6	87	133
DL508075	7.5	69	109	DL508097	9.7	87	133
DL508076	7.6	75	117	DL508098	9.8	87	133
DL508077	7.7	75	117	DL508099	9.9	87	133
DL508078	7.8	75	117	DL508100	10.0	87	133
DL508079	7.9	75	117	DL508102	10.2	87	133
DL508080	8.0	75	117	DL508105	10.5	87	133
DL508081	8.1	75	117	DL508110	11.0	94	142
DL508082	8.2	75	117	DL508112	11.2	94	142
DL508083	8.3	75	117	DL508115	11.5	94	142
DL508084	8.4	75	117	DL508120	12.0	101	151
DL508085	8.5	75	117	DL508125	12.5	101	151
DL508086	8.6	81	125	DL508130	13.0	101	151
DL508087	8.7	81	125	DL508135	13.5	108	160
DL508088	8.8	81	125	DL508140	14.0	108	160
DL508089	8.9	81	125	DL508145	14.5	114	169
DL508090	9.0	81	125	DL508150	15.0	114	169
DL508091	9.1	81	125	DL508155	15.5	120	178
DL508092	9.2	81	125	DL508160	16.0	120	178
DL508093	9.3	81	125				

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	630	400	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					


YG STRAIGHT SHANK DRILLS

DL509 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES LONG

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT LANG
- Forets HSS-E, queue cylindrique pour perçage profond, série longue LONGUE
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP LUNGA

► **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys. ► **Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

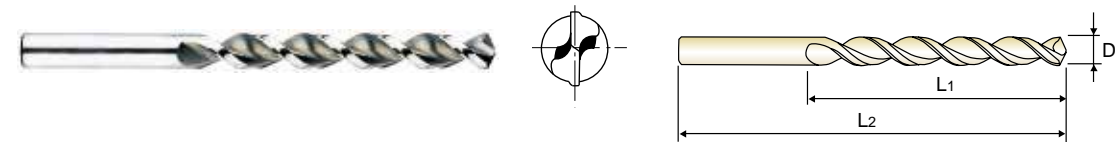

DIN 340 HSS-E 42° h8 130° P.280-281

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL509020	2.0	56	85	DL509046	4.6	82	126
DL509021	2.1	56	85	DL509047	4.7	82	126
DL509022	2.2	59	90	DL509048	4.8	87	132
DL509023	2.3	59	90	DL509049	4.9	87	132
DL509024	2.4	62	95	DL509050	5.0	87	132
DL509025	2.5	62	95	DL509051	5.1	87	132
DL509026	2.6	62	95	DL509052	5.2	87	132
DL509027	2.7	66	100	DL509053	5.3	87	132
DL509028	2.8	66	100	DL509054	5.4	91	139
DL509029	2.9	66	100	DL509055	5.5	91	139
DL509030	3.0	66	100	DL509056	5.6	91	139
DL509031	3.1	69	106	DL509057	5.7	91	139
DL509032	3.2	69	106	DL509058	5.8	91	139
DL509033	3.3	69	106	DL509059	5.9	91	139
DL509034	3.4	73	112	DL509060	6.0	91	139
DL509035	3.5	73	112	DL509061	6.1	97	148
DL509036	3.6	73	112	DL509062	6.2	97	148
DL509037	3.7	73	112	DL509063	6.3	97	148
DL509038	3.8	78	119	DL509064	6.4	97	148
DL509039	3.9	78	119	DL509065	6.5	97	148
DL509040	4.0	78	119	DL509066	6.6	97	148
DL509041	4.1	78	119	DL509067	6.7	97	148
DL509042	4.2	78	119	DL509068	6.8	102	156
DL509043	4.3	82	126	DL509069	6.9	102	156
DL509044	4.4	82	126	DL509070	7.0	102	156
DL509045	4.5	82	126	DL509071	7.1	102	156

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	630	400	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

YG STRAIGHT SHANK DRILLS

DL509 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES


LONG

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique pour perçage profond, série longue
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP

LANG
LONGUE
LUNGA

►Application : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

►Verwendung : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

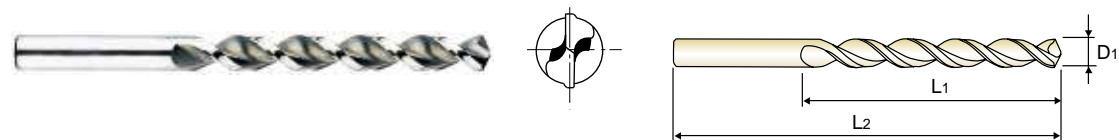

DIN 340 HSS-E 42° h8 130° P.280-281

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL509072	7.2	102	156	DL509089	8.9	115	175
DL509073	7.3	102	156	DL509090	9.0	115	175
DL509074	7.4	102	156	DL509091	9.1	115	175
DL509075	7.5	102	156	DL509092	9.2	115	175
DL509076	7.6	109	165	DL509093	9.3	115	175
DL509077	7.7	109	165	DL509094	9.4	115	175
DL509078	7.8	109	165	DL509095	9.5	115	175
DL509079	7.9	109	165	DL509096	9.6	121	184
DL509080	8.0	109	165	DL509097	9.7	121	184
DL509081	8.1	109	165	DL509098	9.8	121	184
DL509082	8.2	109	165	DL509099	9.9	121	184
DL509083	8.3	109	165	DL509100	10.0	121	184
DL509084	8.4	109	165	DL509102	10.2	121	184
DL509085	8.5	109	165	DL509105	10.5	121	184
DL509086	8.6	115	175	DL509110	11.0	128	195
DL509087	8.7	115	175	DL509115	11.5	128	195
DL509088	8.8	115	175	DL509120	12.0	134	205

◎ : Excellent ○ : Good

ISO	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	125	190	250	270	300
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	125	190	250	270	300
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	550	630	400
Recommended																								

YG STRAIGHT SHANK DRILLS

DL505 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES


JOBBER

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique pour perçage profond, série courte
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP

KURZ
COURTE
CORTA

►Surface treatment : Steam Tempered(Black Oxide Finish)
►Application : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

►Oberflächenbehandlung : Steam Homo(Schwarzoxidation)
►Verwendung : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

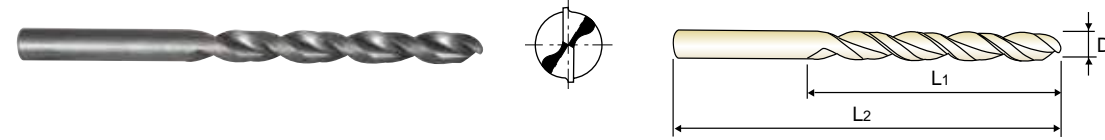

DIN 338 HSS-E 38° h8 130° P.280-281

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL505020	2.0	24	49	DL505046	4.6	47	80
DL505021	2.1	24	49	DL505047	4.7	47	80
DL505022	2.2	27	53	DL505048	4.8	52	86
DL505023	2.3	27	53	DL505049	4.9	52	86
DL505024	2.4	30	57	DL505050	5.0	52	86
DL505025	2.5	30	57	DL505051	5.1	52	86
DL505026	2.6	30	57	DL505052	5.2	52	86
DL505027	2.7	33	61	DL505053	5.3	52	86
DL505028	2.8	33	61	DL505054	5.4	57	93
DL505029	2.9	33	61	DL505055	5.5	57	93
DL505030	3.0	33	61	DL505056	5.6	57	93
DL505031	3.1	36	65	DL505057	5.7	57	93
DL505032	3.2	36	65	DL505058	5.8	57	93
DL505033	3.3	36	65	DL505059	5.9	57	93
DL505034	3.4	39	70	DL505060	6.0	57	93
DL505035	3.5	39	70	DL505061	6.1	63	101
DL505036	3.6	39	70	DL505062	6.2	63	101
DL505037	3.7	39	70	DL505063	6.3	63	101
DL505038	3.8	43	75	DL505064	6.4	63	101
DL505039	3.9	43	75	DL505065	6.5	63	101
DL505040	4.0	43	75	DL505066	6.6	63	101
DL505041	4.1	43	75	DL505067	6.7	63	101
DL505042	4.2	43	75	DL505068	6.8	69	109
DL505043	4.3	47	80	DL505069	6.9	69	109
DL505044	4.4	47	80	DL505070	7.0	69	109
DL505045	4.5	47	80	DL505071	7.1	69	109

► TIN(DN505), TICN(DX505) and TiAIN(DT505) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	125	190	250	270	300
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	125	190	250	270	300
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	550	630	400
Recommended																								

YG STRAIGHT SHANK DRILLS

DL505 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES


JOBBER

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique pour perçage profond, série courte
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP

KURZ
COURTE
CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
► **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
► **Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

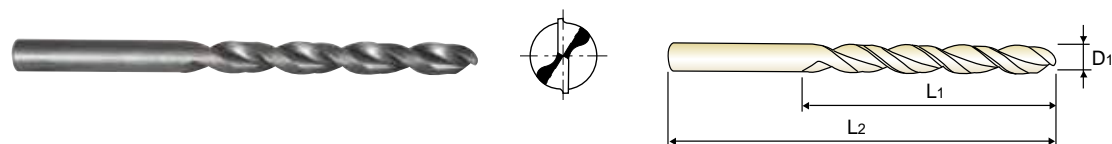

DIN 338 HSS-E 38° h8 130° P.280-281

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL505072	7.2	69	109	DL505093	9.3	81	125
DL505073	7.3	69	109	DL505094	9.4	81	125
DL505074	7.4	69	109	DL505095	9.5	81	125
DL505075	7.5	69	109	DL505096	9.6	87	133
DL505076	7.6	75	117	DL505097	9.7	87	133
DL505077	7.7	75	117	DL505098	9.8	87	133
DL505078	7.8	75	117	DL505099	9.9	87	133
DL505079	7.9	75	117	DL505100	10.0	87	133
DL505080	8.0	75	117	DL505101	10.1	87	133
DL505081	8.1	75	117	DL505102	10.2	87	133
DL505082	8.2	75	117	DL505105	10.5	87	133
DL505083	8.3	75	117	DL505108	10.8	94	142
DL505084	8.4	75	117	DL505110	11.0	94	142
DL505085	8.5	75	117	DL505112	11.2	94	142
DL505086	8.6	81	125	DL505115	11.5	94	142
DL505087	8.7	81	125	DL505118	11.8	94	142
DL505088	8.8	81	125	DL505120	12.0	101	151
DL505089	8.9	81	125	DL505122	12.2	101	151
DL505090	9.0	81	125	DL505125	12.5	101	151
DL505091	9.1	81	125	DL505128	12.8	101	151
DL505092	9.2	81	125	DL505130	13.0	101	151

► TiN(DN505), TiCN(DX505) and TiAlN(DT505) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S							H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys				Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

YG STRAIGHT SHANK DRILLS

DL504 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES


LONG

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT
- Forets HSS-E, queue cylindrique pour perçage profond, série longue
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP

LANG
LONGUE
LUNGA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
► **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
► **Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

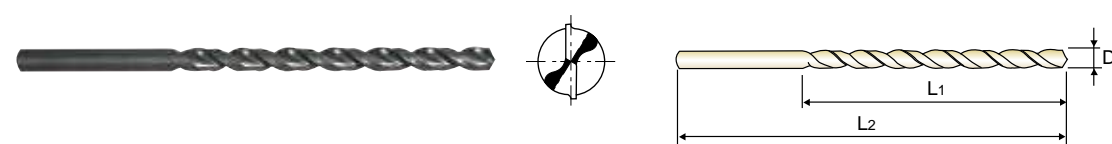

DIN 340 HSS-E 38° h8 130° P.280-281

► DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter		Flute Length		Overall Length		
	D1	L1	L2	D1	L1	L2	
DL504052	5.2	87	132	DL504052	5.2	87	132
DL504055	5.5	91	139	DL504055	5.5	91	139
DL504058	5.8	91	139	DL504058	5.8	91	139
DL504060	6.0	91	139	DL504060	6.0	91	139
DL504062	6.2	97	148	DL504062	6.2	97	148
DL504065	6.5	97	148	DL504065	6.5	97	148
DL504068	6.8	102	156	DL504068	6.8	102	156
DL504070	7.0	102	156	DL504070	7.0	102	156
DL504072	7.2	102	156	DL504072	7.2	102	156
DL504075	7.5	102	156	DL504075	7.5	102	156
DL504078	7.8	109	165	DL504078	7.8	109	165
DL504080	8.0	109	165	DL504080	8.0	109	165
DL504082	8.2	109	165	DL504082	8.2	109	165
DL504085	8.5	109	165	DL504085	8.5	109	165
DL504090	9.0	115	175	DL504090	9.0	115	175
DL504095	9.5	115	175	DL504095	9.5	115	175
DL504098	9.8	121	184	DL504098	9.8	121	184
DL504100	10.0	121	184	DL504100	10.0	121	184
DL504105	10.5	121	184	DL504105	10.5	121	184
DL504110	11.0	128	195	DL504110	11.0	128	195
DL504115	11.5	128	195	DL504115	11.5	128	195
DL504120	12.0	134	205	DL504120	12.0	134	205
DL504125	12.5	134	205	DL504125	12.5	134	205
DL504130	13.0	134	205	DL504130	13.0	134	205

► TiN(DN504), TiCN(DX504) and TiAlN(DT504) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S							H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys				Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

YG STRAIGHT SHANK DRILLS


DT600 SERIES **DT692** SERIES **DT693** SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES *EXTRA LONG*

- HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT *ÜBERLANG*
- Forets HSS-E, queue cylindrique pour perçage profond, Forme C, série extra-longue *EXTRA-LONGUE*
- PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP *EXTRA LUNGA*

▶ **Surface treatment** : TiAlN coating on working area. ▶ **Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

▶ **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

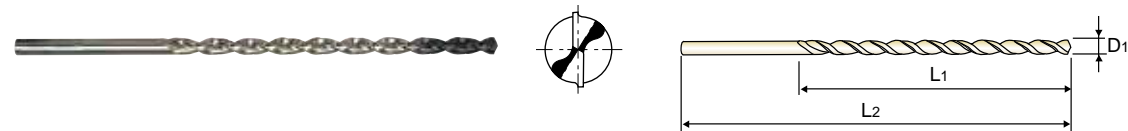

DIN 1869/1, DIN 1869/2, DIN 1869/3, HSS-E, 38°, h8, 130°, P.282

▶ DH100 worm pattern drills

DT600 SERIES (DIN1869/1)

EDP No.	Drill Diameter		Flute Length		Overall Length	
	D1	L1	L2	L1	L2	L2
DT600020	2.0	85	125			
DT600025	2.5	95	140			
DT600030	3.0	100	150			
DT600035	3.5	115	165			
DT600040	4.0	120	175			
DT600045	4.5	125	185			
DT600050	5.0	135	195			
DT600055	5.5	140	205			
DT600060	6.0	140	205			
DT600065	6.5	150	215			
DT600070	7.0	155	225			
DT600075	7.5	155	225			
DT600080	8.0	165	240			
DT600085	8.5	165	240			
DT600090	9.0	175	250			
DT600095	9.5	175	250			
DT600100	10.0	185	265			
DT600105	10.5	185	265			

DT692 SERIES (DIN1869/2)

EDP No.	Drill Diameter		Flute Length		Overall Length	
	D1	L1	L2	L1	L2	L2
DT692030	3.0	130	190			
DT692035	3.5	145	210			
DT692040	4.0	150	220			
DT692045	4.5	160	235			
DT692050	5.0	170	245			
DT692055	5.5	180	260			
DT692060	6.0	180	260			
DT692065	6.5	190	275			
DT692070	7.0	200	290			
DT692075	7.5	200	290			
DT692080	8.0	210	305			
DT692085	8.5	210	305			
DT692090	9.0	220	320			
DT692095	9.5	220	320			
DT692100	10.0	235	340			
DT692102	10.2	235	340			

DT693 SERIES (DIN1869/3)

EDP No.	Drill Diameter		Flute Length		Overall Length	
	D1	L1	L2	L1	L2	L2
DT693040	4.0	190	280			
DT693050	5.0	210	315			
DT693060	6.0	225	330			
DT693080	8.0	265	390			
DT693100	10.0	295	430			

▶ TiN(DN600) and TiCN(DX600) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S							H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	41	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					


YG STRAIGHT SHANK DRILLS

DL608 SERIES

HSS-E, MORSE TAPER SHANK TWIST DRILLS for DEEP HOLES *LONG*

- HSS-E, SPIRALBOHRER für TIEFLOCH mit MORSEKEGELSCHAFT *LANG*
- Forets HSS-E, queue cône morse pour perçage profond, série longue *LONGUE*
- PUNTE IN HSS - E, ATTACCO CONO MORSE PER FORI NON - STOP *LUNGA*

▶ **Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys. ▶ **Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

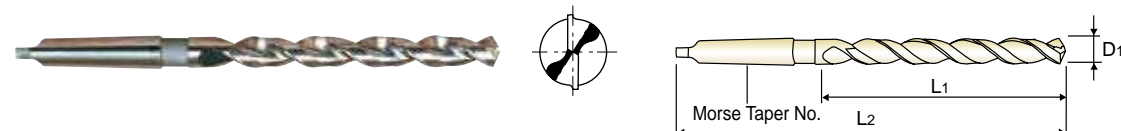

DIN 341, HSS-E, 38°, 1~3, h8, 130°, P.280-281

▶ DH100 worm pattern drills

EDP No.	Drill Diameter		Flute Length		Overall Length		No. of Morse Taper
	D1	L1	L2	L1	L2		
DL608130	13.0	134	215	1			
DL608135	13.5	142	223	1			
DL608140	14.0	142	223	1			
DL608145	14.5	147	245	2			
DL608150	15.0	147	245	2			
DL608155	15.5	153	251	2			
DL608160	16.0	153	251	2			
DL608165	16.5	159	257	2			
DL608170	17.0	159	257	2			
DL608175	17.5	165	263	2			
DL608180	18.0	165	263	2			
DL608185	18.5	171	269	2			
DL608190	19.0	171	269	2			

EDP No.	Drill Diameter		Flute Length		Overall Length		No. of Morse Taper
	D1	L1	L2	L1	L2		
DL608195	19.5	177	275	2			
DL608200	20.0	177	275	2			
DL608210	21.0	184	282	2			
DL608220	22.0	191	289	2			
DL608230	23.0	198	296	2			
DL608240	24.0	206	327	3			
DL608250	25.0	206	327	3			
DL608260	26.0	214	335	3			
DL608270	27.0	222	343	3			
DL608280	28.0	222	343	3			
DL608290	29.0	230	351	3			
DL608300	30.0	230	351	3			

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N							S							H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	41	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					


YG STRAIGHT SHANK DRILLS

DL507 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for ALUMINUM DEEP HOLES EXTRA LONG

🇩🇪 HSS-E, SPIRALBOHRER für ALUMINIUM TIEFLOCH mit ZYLINDERSCHAFT **ÜBERLANG**
🇫🇷 Forets HSS-E, queue cylindrique pour ALU, perçage profond, série extra-longue **EXTRA-LONGUE**
🇮🇹 PUNTE HSS-E, GAMBO CILINDRICO PER FORATURE NON - STOP SU ALLUMINIO **EXTRA LUNGA**

▶Application : Drilling deep holes in aluminum and its alloys, silumin, zinc, refined copper, wood and other soft synthetic materials.
▶Verwendung : Zum Bohren von weichen und langspanenden Werkstoffen wie Alu-Legierungen, Zink, Kupfer, Kunststoffe und Holz.

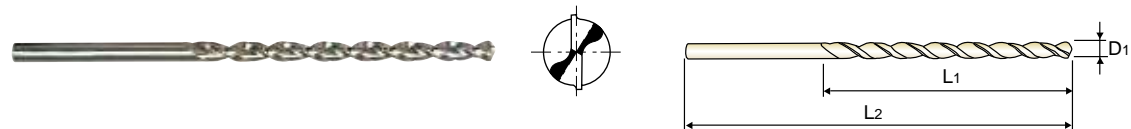

▶ DH50 worm pattern drills

Unit : mm

EDP No.	Drill Diameter			EDP No.	Drill Diameter		
	D1	L1	L2		D1	L1	L2
DL507120	2.0	40	75	DL507430	3.0	100	200
DL507121	2.1	40	75	DL507433	3.3	100	200
DL507220	2.0	50	100	DL507435	3.5	100	200
DL507221	2.1	50	100	DL507440	4.0	100	200
DL507225	2.5	50	100	DL507442	4.2	100	200
DL507227	2.7	50	100	DL507445	4.5	100	200
DL507230	3.0	50	100	DL507450	5.0	100	200
DL507233	3.3	50	100	DL507453	5.3	100	200
DL507235	3.5	50	100	DL507455	5.5	100	200
DL507320	2.0	75	150	DL507460	6.0	100	200
DL507321	2.1	75	150	DL507465	6.5	100	200
DL507325	2.5	75	150	DL507468	6.8	100	200
DL507327	2.7	75	150	DL507470	7.0	100	200
DL507330	3.0	75	150	DL507475	7.5	100	200
DL507333	3.3	75	150	DL507480	8.0	100	200
DL507335	3.5	75	150	DL507485	8.5	100	200
DL507340	4.0	75	150	DL507488	8.8	100	200
DL507342	4.2	75	150	DL507490	9.0	100	200
DL507345	4.5	75	150	DL507495	9.5	100	200
DL507350	5.0	75	150	DL507700	10.0	100	200
DL507353	5.3	75	150	DL507540	4.0	150	250
DL507355	5.5	75	150	DL507542	4.2	150	250
DL507360	6.0	75	150	DL507545	4.5	150	250
				DL507550	5.0	150	250
				DL507553	5.3	150	250

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○																			

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	○																		


YG STRAIGHT SHANK DRILLS

DL507 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for ALUMINUM DEEP HOLES EXTRA LONG

🇩🇪 HSS-E, SPIRALBOHRER für ALUMINIUM TIEFLOCH mit ZYLINDERSCHAFT **ÜBERLANG**
🇫🇷 Forets HSS-E, queue cylindrique pour ALU, perçage profond, série extra-longue **EXTRA-LONGUE**
🇮🇹 PUNTE HSS-E, GAMBO CILINDRICO PER FORATURE NON - STOP SU ALLUMINIO **EXTRA LUNGA**

▶Application : Drilling deep holes in aluminum and its alloys, silumin, zinc, refined copper, wood and other soft synthetic materials.
▶Verwendung : Zum Bohren von weichen und langspanenden Werkstoffen wie Alu-Legierungen, Zink, Kupfer, Kunststoffe und Holz.

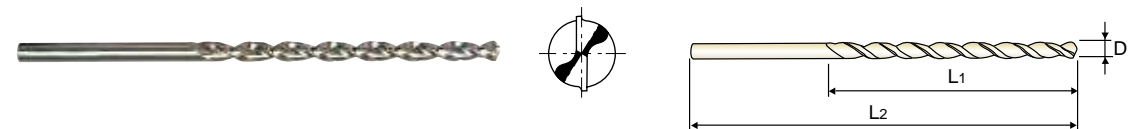

▶ DH50 worm pattern drills

Unit : mm

EDP No.	Drill Diameter			EDP No.	Drill Diameter		
	D1	L1	L2		D1	L1	L2
DL507555	5.5	150	250	DL507650	5.0	180	300
DL507560	6.0	150	250	DL507653	5.3	180	300
DL507565	6.5	150	250	DL507655	5.5	180	300
DL507568	6.8	150	250	DL507660	6.0	180	300
DL507570	7.0	150	250	DL507665	6.5	180	300
DL507575	7.5	150	250	DL507668	6.8	180	300
DL507580	8.0	150	250	DL507670	7.0	180	300
DL507585	8.5	150	250	DL507675	7.5	180	300
DL507588	8.8	150	250	DL507680	8.0	180	300
DL507590	9.0	150	250	DL507685	8.5	180	300
DL507595	9.5	150	250	DL507688	8.8	180	300
DL507800	10.0	150	250	DL507690	9.0	180	300
DL507803	10.3	150	250	DL507695	9.5	180	300
DL507805	10.5	150	250	DL507900	10.0	180	300
DL507810	11.0	150	250	DL507903	10.3	180	300
DL507815	11.5	150	250	DL507905	10.5	180	300
DL507820	12.0	150	250	DL507910	11.0	180	300
DL507825	12.5	150	250	DL507915	11.5	180	300
DL507830	13.0	150	250	DL507920	12.0	180	300
				DL507925	12.5	180	300
				DL507930	13.0	180	300

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○																			

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	○																		

YG STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

D2107, D1107, D2105, DL105, D1105, D1125, D2104, D1121, DL109 SERIES

**HSS, HSS-E & HSSCo8
COBALT DRILLS**

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)										
					2.0	3.0	4.0	6.0	8.0						
P	1	Non-alloy steel	30	RPM	4770	3180	2390	1590	1190						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
				RPM	3980	2650	1990	1330	990						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
				RPM	3180	2120	1590	1060	800						
	2	Non-alloy steel	25	RPM	3180	2120	1590	1060	800						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
	3	Non-alloy steel	20	RPM	3180	2120	1590	1060	800						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
	4	Non-alloy steel	20	RPM	3180	2120	1590	1060	800						
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06						
M	6	Low alloy steel	25	RPM	3980	2650	1990	1330	990						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
				RPM	3180	2120	1590	1060	800						
	7	Low alloy steel	20	RPM	3180	2120	1590	1060	800						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
	8	Low alloy steel	20	RPM	3180	2120	1590	1060	800						
FEED				0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06							
10	High alloyed steel, and tool steel	15	RPM	2390	1590	1190	800	600							
			FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13							
K	12	Stainless steel	20	RPM	3180	2120	1590	1060	800						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
				RPM	2390	1590	1190	800	600						
K	13	Stainless steel	15	RPM	2390	1590	1190	800	600						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
	14	Stainless steel	10	RPM	1590	1060	800	530	400						
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06						
	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
	16	Grey cast iron	25	RPM	3980	2650	1990	1330	990						
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06						
	17	Nodular cast iron	30	RPM	4770	3180	2390	1590	1190						
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13						
19	Malleable cast iron	25	RPM	3980	2650	1990	1330	990							
			FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13							
N	21	Aluminum-wrought alloy	55	RPM	8750	5840	4380	2920	2190						
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18						
	22	Aluminum-wrought alloy	55	RPM	8750	5840	4380	2920	2190						
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18						
	23	Aluminum-cast, alloyed	40	RPM	6370	4240	3180	2120	1590						
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18						
	S	29	Non Metallic Materials	20	RPM	3180	2120	1590	1060	800					
					FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13					
		31	Heat Resistant Super Alloys	10	RPM	1590	1060	800	530	400					
					FEED	0.01~0.03	0.02~0.04	0.03~0.05	0.04~0.07	0.05~0.08					
36					Titanium Alloys	10	RPM	1590	1060	800	530	400			
							FEED	0.01~0.03	0.02~0.04	0.03~0.05	0.04~0.07	0.05~0.08			
							38	Hardened steel		RPM					
										FEED					
40	Chilled Cast Iron		RPM												
			FEED												
41	Hardened Cast Iron		RPM												
			FEED												

YG STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm)					
		10.0	13.0	16.0	18.0	20.0	30.0
1	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
2	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
3	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
4	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
6	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
7	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
8	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
10	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
12	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
13	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
14	RPM	320	240	200	180	160	110
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
15	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
16	RPM	800	610	500	440	400	270
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
17	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
19	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
21	RPM	1750	1350	1090	970	880	580
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
22	RPM	1750	1350	1090	970	880	580
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
23	RPM	1270	980	800	710	640	420
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
29	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
36	RPM	320	240	200	180	160	110
	FEED	0.05~0.09	0.06~0.10	0.05~0.11	0.06~0.12	0.09~0.13	0.12~0.18

YG STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

D1100 SERIES HSS, TWIST DRILLS for BRASS / BRONZE

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)																	
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	13.0										
P	1	Non-alloy steel																				
	2																					
	3																					
	4																					
	5																					
	6	Low alloy steel																				
	7																					
	8																					
	9																					
	10																					
	11	High alloyed steel, and tool steel																				
M	12	Stainless steel																				
	13																					
	14																					
K	15	Grey cast iron																				
	16	Nodular cast iron																				
	17																					
	18																					
	19	Malleable cast iron																				
20																						
N	21	Aluminum-wrought alloy											45	RPM	7160	4770	3580	2860	2390	1790	1430	1100
	22	Aluminum-cast, alloyed																				
	23																					
	24																					
	25																					
	26																					
	27	Copper and Copper Alloys (Bronze / Brass)	RPM FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.12~0.16	0.16~0.20	0.19~0.25	0.22~0.32											
	28	Non Metallic Materials	RPM FEED	0.02~0.05	0.03~0.06	0.04~0.08	0.05~0.09	0.07~0.11	0.09~0.13	0.10~0.16	0.11~0.21											
	29																					
	30																					
S	31	Heat Resistant Super Alloys																				
	32																					
	33																					
	34																					
	35																					
	36	Titanium Alloys																				
	37																					
H	38	Hardened steel																				
	39	Chilled Cast Iron																				
	40																					
	41												Hardened Cast Iron									

YG STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

D1106 SERIES HSS, TWIST DRILLS for ALUMINUM

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)																	
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	13.0										
P	1	Non-alloy steel																				
	2																					
	3																					
	4																					
	5																					
	6	Low alloy steel																				
	7																					
	8																					
	9																					
	10																					
	11	High alloyed steel, and tool steel																				
M	12	Stainless steel																				
	13																					
	14																					
K	15	Grey cast iron																				
	16	Nodular cast iron																				
	17																					
	18																					
	19	Malleable cast iron																				
20																						
N	21	Aluminum-wrought alloy											50	RPM	7960	5310	3980	3180	2650	1990	1590	1220
	22	Aluminum-cast, alloyed											50	RPM FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35
	23		40	RPM	7960	5310	3980	3180	2650	1990	1590	1220										
	24		30	RPM FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35										
	25		40	RPM	6370	4240	3180	2550	2120	1590	1270	980										
	26		30	RPM FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35										
	27	Copper and Copper Alloys (Bronze / Brass)																				
	28	Non Metallic Materials																				
	29																					
	30																					
S	31	Heat Resistant Super Alloys																				
	32																					
	33																					
	34																					
	35																					
	36	Titanium Alloys																				
	37																					
H	38	Hardened steel																				
	39	Chilled Cast Iron																				
	40																					
	41												Hardened Cast Iron									

YG STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DL510, DL508, DL509, DL505, DL504, DL608 SERIES

HSS-E, DH100 WORM PATTERN DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)					
					2.0	3.0	4.0	6.0	8.0	
P	1	Non-alloy steel	30	RPM	4770	3180	2390	1590	1190	
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	
				25	RPM	3980	2650	1990	1330	990
					FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
					RPM	3180	2120	1590	1060	800
	20	FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13			
		RPM	3180	2120	1590	1060	800			
	20	FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06			
	25	Low alloy steel	20	RPM	3980	2650	1990	1330	990	
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	
RPM				3180	2120	1590	1060	800		
FEED				0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13		
RPM				3180	2120	1590	1060	800		
FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06					
15	High alloyed steel, and tool steel	15	RPM	2390	1590	1190	800	600		
			FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13		
M	12	Stainless steel								
K	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190	
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	
	25	RPM	3980	2650	1990	1330	990			
		FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06			
	30	Nodular cast iron	20	RPM	4770	3180	2390	1590	1190	
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13	
	20	RPM	3180	2120	1590	1060	800			
		FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06			
25	Malleable cast iron	20	RPM	3980	2650	1990	1330	990		
			FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13		
20	RPM	3180	2120	1590	1060	800				
	FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06				
N	21	Aluminum-wrought alloy								
	24	Aluminum-cast, alloyed								
26	Copper and Copper Alloys (Bronze / Brass)									
29	Non Metallic Materials									
S	31	Heat Resistant Super Alloys								
	36	Titanium Alloys								
H	38	Hardened steel								
40	Chilled Cast Iron									
41	Hardened Cast Iron									

YG STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm)					
		10.0	13.0	16.0	18.0	20.0	30.0
1	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
2	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
3	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
4	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
5							
6	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.2	0.19~0.25	0.22~0.28
7	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.2	0.19~0.25	0.22~0.28
8	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
9							
10	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
11							
12							
13							
14							
15	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
16	RPM	800	610	500	440	400	270
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
17	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
18	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
19	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
20	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							



STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

DT600, DT692, DT693 SERIES HSS-E, DH100 WORM PATTERN DRILLS (EXTRA LONG)

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					2.0	3.0	4.0	6.0	8.0	10.0	13.0	
P	1	Non-alloy steel	20	RPM FEED	3180 0.01~0.03	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.08~0.11	640 0.09~0.13	490 0.10~0.16	
			2	RPM	2390	1590	1190	800	600	480	370	
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16	
			3	RPM	1590	1060	800	530	400	320	240	
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16	
	4	RPM	1590	1060	800	530	400	320	240			
		FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10			
	6	Low alloy steel	15	RPM FEED	2390 0.01~0.03	1590 0.03~0.05	1190 0.04~0.06	800 0.05~0.08	600 0.08~0.11	480 0.09~0.13	370 0.10~0.16	
			10	RPM	1590	1060	800	530	400	320	240	
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16	
	8	Low alloy steel	RPM	1590	1060	800	530	400	320	240		
FEED			0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10			
10	High alloyed steel, and tool steel	5	RPM FEED	800 0.01~0.03	530 0.03~0.05	400 0.04~0.06	270 0.05~0.08	200 0.08~0.11	160 0.09~0.13	120 0.10~0.16		
		11										
M	12	Stainless steel										
K	15	Grey cast iron	20	RPM FEED	3180 0.01~0.03	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.08~0.11	640 0.09~0.13	490 0.10~0.16	
			15	RPM FEED	2390 0.01~0.02	1590 0.01~0.03	1190 0.02~0.04	800 0.02~0.05	600 0.03~0.06	480 0.03~0.06	370 0.04~0.10	
	17	Nodular cast iron	20	RPM FEED	3180 0.01~0.03	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.08~0.11	640 0.09~0.13	490 0.10~0.16	
			10	RPM FEED	1590 0.01~0.02	1060 0.01~0.03	800 0.02~0.04	530 0.02~0.05	400 0.03~0.06	320 0.03~0.06	240 0.04~0.10	
	19	Malleable cast iron	15	RPM FEED	2390 0.01~0.03	1590 0.03~0.05	1190 0.04~0.06	800 0.05~0.08	600 0.08~0.11	480 0.09~0.13	370 0.10~0.16	
			10	RPM FEED	1590 0.01~0.02	1060 0.01~0.03	800 0.02~0.04	530 0.02~0.05	400 0.03~0.06	320 0.03~0.06	240 0.04~0.10	
N	21	Aluminum-wrought alloy										
	23	Aluminum-cast, alloyed	55	RPM FEED	8750 0.02~0.04	5840 0.03~0.06	4380 0.04~0.08	2920 0.08~0.12	2190 0.10~0.16	1750 0.14~0.20	1350 0.16~0.26	
			45	RPM	7160	4770	3580	2390	1790	1430	1100	
				FEED	0.02~0.04	0.03~0.06	0.04~0.08	0.08~0.12	0.10~0.16	0.14~0.20	0.16~0.26	
			40	RPM	6370	4240	3180	2120	1590	1270	980	
				FEED	0.02~0.04	0.03~0.06	0.04~0.08	0.08~0.12	0.10~0.16	0.14~0.20	0.16~0.26	
			25	Aluminum-cast, alloyed								
			26	Copper and Copper Alloys (Bronze / Brass)								
27	Copper and Copper Alloys (Bronze / Brass)											
28	Copper and Copper Alloys (Bronze / Brass)											
29	Non Metallic Materials											
S	31	Heat Resistant Super Alloys										
36	Titanium Alloys											
H	38	Hardened steel										
40	Chilled Cast Iron											
41	Hardened Cast Iron											



STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

DL507 SERIES HSS-E, DH50 WORM PATTERN DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)						
					2.0	3.0	4.0	6.0	8.0	10.0	13.0
P	1	Non-alloy steel	15	RPM FEED	2390 0.01~0.03	1590 0.02~0.04	1190 0.03~0.06	800 0.04~0.08	600 0.04~0.10	480 0.07~0.13	370 0.09~0.15
			2								
				3							
			4								
				5							
	6	Low alloy steel									
			7								
				8							
	10	High alloyed steel, and tool steel									
			11								
	M	12	Stainless steel								
K	15	Grey cast iron									
	17	Nodular cast iron									
	19	Malleable cast iron									
N	21	Aluminum-wrought alloy	55	RPM FEED	8750 0.02~0.04	5840 0.03~0.06	4380 0.04~0.08	2920 0.08~0.12	2190 0.10~0.16	1750 0.14~0.20	1350 0.16~0.26
			45	RPM FEED	7160 0.02~0.04	4770 0.03~0.06	3580 0.04~0.08	2390 0.08~0.12	1790 0.10~0.16	1430 0.14~0.20	1100 0.16~0.26
	23	Aluminum-cast, alloyed	40	RPM FEED	6370 0.02~0.04	4240 0.03~0.06	3180 0.04~0.08	2120 0.08~0.12	1590 0.10~0.16	1270 0.14~0.20	980 0.16~0.26
	25	Aluminum-cast, alloyed									
	26	Copper and Copper Alloys (Bronze / Brass)									
	27	Copper and Copper Alloys (Bronze / Brass)									
28	Copper and Copper Alloys (Bronze / Brass)										
29	Non Metallic Materials										
S	31	Heat Resistant Super Alloys									
36	Titanium Alloys										
H	38	Hardened steel									
40	Chilled Cast Iron										
41	Hardened Cast Iron										



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING

HSS & HSS-E

MORSE TAPER SHANK DRILLS

BOHRER MIT MK

- Morse Taper Shank Drills for Wide Applications
- Bohrer mit Morsekegel für breite Anwendungen

SELECTION GUIDE



SERIES	DL205	D1205	D1206
STANDARD	DIN345	DIN345	DIN341
LENGTH	JOBBER	JOBBER	LONG
SIZE MIN	D13.0	D5.0	D13.0
SIZE MAX	D30.0	D60.0	D30.0
PAGE	288	289	292

SURFACE TREATMENT	Bright	Steam Tempered

HSS & HSS-E MORSE TAPER SHANK DRILLS

Morse Taper Shank Drills for Wide Applications

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good


Recommended cutting conditions : P.295



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	
P	1	Non-alloy steel	About 0.15% C Annealed	125		
	2		About 0.45% C Annealed	190	13	
	3		About 0.45% C Quenched & Tempered	250	25	
	4		About 0.75% C Annealed	270	28	
	5		About 0.75% C Quenched & Tempered	300	32	
	6	Low alloy steel	Annealed	180	10	
	7		Quenched & Tempered	275	29	
	8		Quenched & Tempered	300	32	
	9		Quenched & Tempered	350	38	
	10		High alloyed steel, and tool steel	Annealed	200	15
	11		Quenched & Tempered	325	35	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	
	13		Martensitic Quenched & Tempered	240	23	
	14		Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	
	16		Pearlitic (Martensitic)	260	26	
	17	Nodular cast iron	Ferritic	160	3	
	18		Pearlitic	250	25	
	19		Ferritic	130		
20	Malleable cast iron	Pearlitic	230	21		
N	21	Aluminum-wrought alloy	Not Curable	60		
	22		Curable Hardened	100		
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		
	24		≤ 12% Si, Curable Hardened	90		
	25		> 12% Si, Not Curable	130		
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		
	27		CuZn, CuSnZn (Brass)	90		
	28		CuSn, lead-free copper and electrolytic copper	100		
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			
30	Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	
	32		Cured	280	30	
	33		Annealed	250	25	
	34		Ni or Co Based Cured	350	38	
	35		Cast	320	34	
	36	Titanium Alloys	Pure Titanium	400 Rm		
	37		Alpha + Beta Alloys Hardened	1050 Rm		
H	38	Hardened steel	Hardened	550	55	
	39		Hardened	630	60	
	40		Chilled Cast Iron	Cast	400	42
	41		Hardened Cast Iron	Hardened	550	55

D1209	D1210
DIN1870/1	DIN1870/2
EXTRA LONG	EXTRA LONG
D13.0	D13.0
D50.0	D50.0
293	294

Steam Tempered

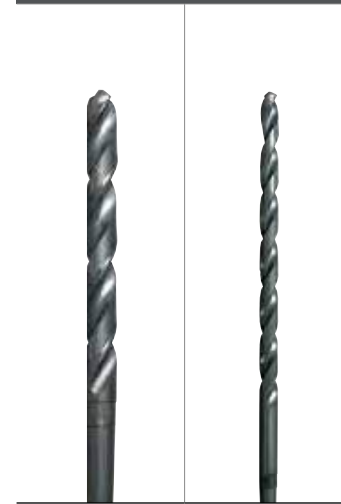


ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	
P	1	Non-alloy steel	About 0.15% C Annealed	125		
	2		About 0.45% C Annealed	190	13	
	3		About 0.45% C Quenched & Tempered	250	25	
	4		About 0.75% C Annealed	270	28	
	5		About 0.75% C Quenched & Tempered	300	32	
	6	Low alloy steel	Annealed	180	10	
	7		Quenched & Tempered	275	29	
	8		Quenched & Tempered	300	32	
	9		Quenched & Tempered	350	38	
	10		High alloyed steel, and tool steel	Annealed	200	15
	11		Quenched & Tempered	325	35	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	
	13		Martensitic Quenched & Tempered	240	23	
	14		Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	
	16		Pearlitic (Martensitic)	260	26	
	17	Nodular cast iron	Ferritic	160	3	
	18		Pearlitic	250	25	
	19		Ferritic	130		
20	Malleable cast iron	Pearlitic	230	21		
N	21	Aluminum-wrought alloy	Not Curable	60		
	22		Curable Hardened	100		
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		
	24		≤ 12% Si, Curable Hardened	90		
	25		> 12% Si, Not Curable	130		
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		
	27		CuZn, CuSnZn (Brass)	90		
	28		CuSn, lead-free copper and electrolytic copper	100		
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			
30	Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	
	32		Cured	280	30	
	33		Annealed	250	25	
	34		Ni or Co Based Cured	350	38	
	35		Cast	320	34	
	36	Titanium Alloys	Pure Titanium	400 Rm		
	37		Alpha + Beta Alloys Hardened	1050 Rm		
H	38	Hardened steel	Hardened	550	55	
	39		Hardened	630	60	
	40		Chilled Cast Iron	Cast	400	42
	41		Hardened Cast Iron	Hardened	550	55

YG MORSE TAPER SHANK DRILLS

DL205 SERIES

HSS-E, MORSE TAPER SHANK TWIST DRILLS for HEAVY DUTY **JOBBER**
 ● HSS-E, SPIRALBOHRER für HOHELEISTUNGEN mit MORSEKEGELSCHAFT **KURZ**
 ● Forets HSS-E, queue cône morse pour matériaux durs, série courte **COURTE**
 ● HSS-E, PUNTE ELICOIDALI, ATTACCO CM PER LAVORAZIONI GRAVOSE **CORTA**

► **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite. ► **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphit.

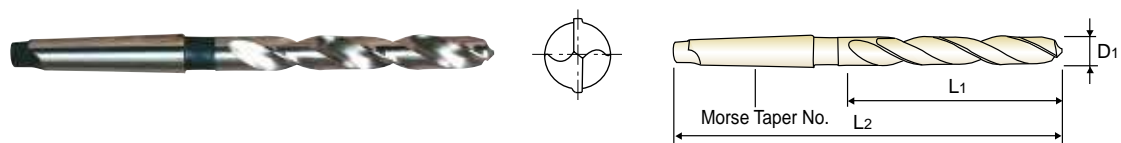

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
DL205130	13.0	101	182	1
DL205135	13.5	108	189	1
DL205140	14.0	108	189	1
DL205145	14.5	114	212	2
DL205150	15.0	114	212	2
DL205155	15.5	120	218	2
DL205160	16.0	120	218	2
DL205165	16.5	125	223	2
DL205170	17.0	125	223	2
DL205175	17.5	130	228	2
DL205180	18.0	130	228	2
DL205185	18.5	135	233	2
DL205190	19.0	135	233	2
DL205195	19.5	140	238	2
DL205200	20.0	140	238	2
DL205205	20.5	145	243	2
DL205210	21.0	145	243	2
DL205215	21.5	150	248	2

© : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG MORSE TAPER SHANK DRILLS

D1205 SERIES

HSS, MORSE TAPER SHANK TWIST DRILLS **JOBBER**
 ● HSS, SPIRALBOHRER mit MORSEKEGELSCHAFT **KURZ**
 ● Forets HSS, queue cône morse, série courte **COURTE**
 ● PUNTE ELICOIDALI IN HSS, ATTACCO CM **CORTA**

► **Surface treatment** : Steam Tempered(Black Oxide Finish) ► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
 ► **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite. ► **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphit.

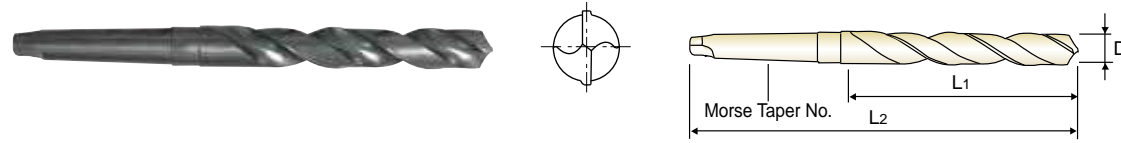

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1205050	5.0	52	133	1
D1205055	5.5	57	138	1
D1205060	6.0	57	138	1
D1205065	6.5	63	144	1
D1205070	7.0	69	150	1
D1205075	7.5	69	150	1
D1205080	8.0	75	156	1
D1205085	8.5	75	156	1
D1205090	9.0	81	162	1
D1205095	9.5	81	162	1
D1205100	10.0	87	168	1
D1205105	10.5	87	168	1
D1205110	11.0	94	175	1
D1205115	11.5	94	175	1
D1205120	12.0	101	182	1
D1205125	12.5	101	182	1
D1205130	13.0	101	182	1
D1205132	13.2	101	182	1
D120513A	13.25	108	189	1
D1205135	13.5	108	189	1
D120513B	13.75	108	189	1
D1205138	13.8	108	189	1
D1205140	14.0	108	189	1
D120514A	14.25	114	212	2
D1205145	14.5	114	212	2
D120514B	14.75	114	212	2

© : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG MORSE TAPER SHANK DRILLS

D1205 SERIES

HSS, MORSE TAPER SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit MORSEKEGELSCHAFT
- Forets HSS, queue cône morse, série courte
- PUNTE ELICOIDALI IN HSS, ATTACCO CM

KURZ
COURTE
CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
► **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
► **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphit.

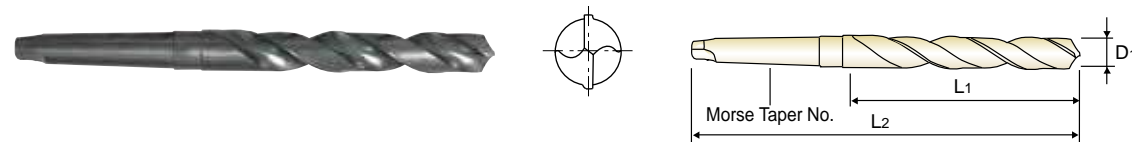

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.	EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2			D1	L1	L2	
D1205215	21.5	150	248	2	D1205280	28.0	170	291	3
D120521B	21.75	150	248	2	D120528A	28.25	175	296	3
D1205220	22.0	150	248	2	D1205285	28.5	175	296	3
D120522A	22.25	150	248	2	D120528B	28.75	175	296	3
D1205225	22.5	155	253	2	D1205290	29.0	175	296	3
D120522B	22.75	155	253	2	D120529A	29.25	175	296	3
D1205230	23.0	155	253	2	D1205295	29.5	175	296	3
D120523A	23.25	155	276	3	D120529B	29.75	175	296	3
D1205235	23.5	155	276	3	D1205300	30.0	175	296	3
D120523B	23.75	160	281	3	D120530A	30.25	180	301	3
D1205240	24.0	160	281	3	D1205305	30.5	180	301	3
D120524A	24.25	160	281	3	D120530B	30.75	180	301	3
D1205245	24.5	160	281	3	D1205310	31.0	180	301	3
D120524B	24.75	160	281	3	D120531A	31.25	180	301	3
D1205250	25.0	160	281	3	D1205315	31.5	180	301	3
D120525A	25.25	165	286	3	D120531B	31.75	185	306	3
D1205255	25.5	165	286	3	D1205320	32.0	185	334	4
D120525B	25.75	165	286	3	D1205325	32.5	185	334	4
D1205260	26.0	165	286	3	D1205330	33.0	185	334	4
D120526A	26.25	165	286	3	D1205335	33.5	185	334	4
D1205265	26.5	165	286	3	D1205340	34.0	190	339	4
D120526B	26.75	170	291	3	D1205345	34.5	190	339	4
D1205270	27.0	170	291	3	D1205350	35.0	190	339	4
D120527A	27.25	170	291	3	D1205355	35.5	190	339	4
D1205275	27.5	170	291	3	D1205360	36.0	195	344	4
D120527B	27.75	170	291	3	D1205365	36.5	195	344	4

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○					○					

YG MORSE TAPER SHANK DRILLS

D1205 SERIES

HSS, MORSE TAPER SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit MORSEKEGELSCHAFT
- Forets HSS, queue cône morse, série courte
- PUNTE ELICOIDALI IN HSS, ATTACCO CM

KURZ
COURTE
CORTA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
► **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
► **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphit.

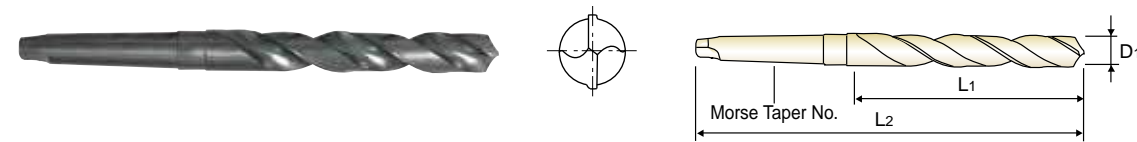

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.	EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2			D1	L1	L2	
D1205370	37.0	195	344	4	D1205465	46.5	215	364	4
D1205375	37.5	195	344	4	D1205470	47.0	215	364	4
D1205380	38.0	200	349	4	D1205475	47.5	215	364	4
D1205385	38.5	200	349	4	D1205480	48.0	220	369	4
D1205390	39.0	200	349	4	D1205485	48.5	220	369	4
D1205395	39.5	200	349	4	D1205490	49.0	220	369	4
D1205400	40.0	200	349	4	D1205495	49.5	220	369	4
D1205405	40.5	205	354	4	D1205500	50.0	220	369	4
D1205410	41.0	205	354	4	D1205505	50.5	225	374	4
D1205415	41.5	205	354	4	D1205510	51.0	225	412	5
D1205420	42.0	205	354	4	D1205520	52.0	225	412	5
D1205425	42.5	205	354	4	D1205530	53.0	225	412	5
D1205430	43.0	210	359	4	D1205540	54.0	230	417	5
D1205435	43.5	210	359	4	D1205550	55.0	230	417	5
D1205440	44.0	210	359	4	D1205560	56.0	230	417	5
D1205445	44.5	210	359	4	D1205570	57.0	235	422	5
D1205450	45.0	210	359	4	D1205580	58.0	235	422	5
D1205455	45.5	215	364	4	D1205590	59.0	235	422	5
D1205460	46.0	215	364	4	D1205600	60.0	235	422	5

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○								○					○					

YG MORSE TAPER SHANK DRILLS

D1206 SERIES

HSS, MORSE TAPER SHANK TWIST DRILLS

LONG

- HSS, SPIRALBOHRER mit MORSEKEGELSCHAFT
- Forets HSS, queue cône morse, série longue
- PUNTE ELICOIDALI IN HSS, ATTACCO CM


LANG

LONGUE

LUNGA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
 ► **Application** : Drilling deep holes in steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
 ► **Verwendung** : Für Bohrungen mit Bohrbuchsen oder an tief liegenden Stellen.
 Zum Bohren von Stahl und Stahlguß, Grauß, Temperguß, Sphäroguß, Sintereisen, Neusilber und Graphit.

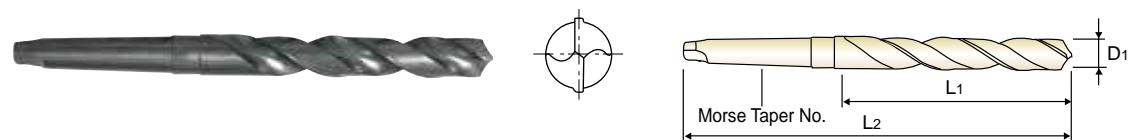

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1206130	13.0	134	215	1
D1206135	13.5	142	223	1
D1206140	14.0	142	223	1
D1206145	14.5	147	245	2
D1206150	15.0	147	245	2
D1206155	15.5	153	251	2
D1206160	16.0	153	251	2
D1206165	16.5	159	257	2
D1206170	17.0	159	257	2
D1206175	17.5	165	263	2
D1206180	18.0	165	263	2
D1206185	18.5	171	269	2
D1206190	19.0	171	269	2

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1206195	19.5	177	275	2
D1206200	20.0	177	275	2
D1206210	21.0	184	282	2
D1206220	22.0	191	289	2
D1206230	23.0	198	296	2
D1206240	24.0	206	327	3
D1206250	25.0	206	327	3
D1206260	26.0	214	335	3
D1206270	27.0	222	343	3
D1206280	28.0	222	343	3
D1206290	29.0	230	351	3
D1206300	30.0	230	351	3

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○								○					○					

YG MORSE TAPER SHANK DRILLS

D1209 SERIES

HSS, MORSE TAPER SHANK TWIST DRILLS

EXTRA LONG

- HSS, SPIRALBOHRER mit MORSEKEGELSCHAFT
- Forets HSS, queue cône morse, série extra-longue
- PUNTE ELICOIDALI IN HSS, ATTACCO CM


ÜBERLANG

EXTRA-LONGUE

EXTRA LUNGA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
 ► **Application** : Drilling deep holes in steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
 ► **Verwendung** : Für Bohrungen mit Bohrbuchsen oder an tief liegenden Stellen.
 Zum Bohren von Stahl und Stahlguß, Grauß, Temperguß, Sphäroguß, Sintereisen, Neusilber und Graphit.

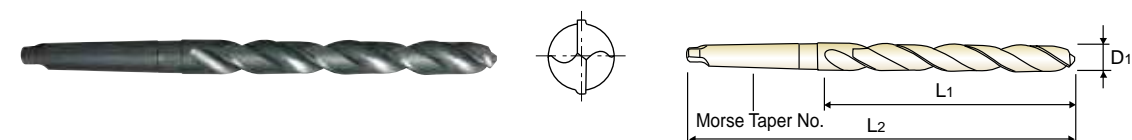

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1209130	13.0	205	310	1
D1209135	13.5	220	325	1
D1209140	14.0	220	325	1
D1209145	14.5	220	340	2
D1209150	15.0	220	340	2
D1209155	15.5	230	355	2
D1209160	16.0	230	355	2
D1209165	16.5	230	355	2
D1209170	17.0	230	355	2
D1209175	17.5	245	370	2
D1209180	18.0	245	370	2
D1209185	18.5	245	370	2
D1209190	19.0	245	370	2
D1209195	19.5	260	385	2
D1209200	20.0	260	385	2
D1209205	20.5	260	385	2
D1209210	21.0	260	385	2
D1209215	21.5	270	405	2
D1209220	22.0	270	405	2
D1209225	22.5	270	405	2
D1209230	23.0	270	405	2
D1209235	23.5	270	425	3
D1209240	24.0	290	440	3
D1209245	24.5	290	440	3
D1209250	25.0	290	440	3
D1209255	25.5	290	440	3
D1209260	26.0	290	440	3
D1209265	26.5	290	440	3

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1209270	27.0	305	460	3
D1209275	27.5	305	460	3
D1209280	28.0	305	460	3
D1209285	28.5	305	460	3
D1209290	29.0	305	460	3
D1209295	29.5	305	460	3
D1209300	30.0	305	460	3
D1209305	30.5	320	480	3
D1209310	31.0	320	480	3
D1209320	32.0	320	505	4
D1209330	33.0	320	505	4
D1209340	34.0	340	530	4
D1209350	35.0	340	530	4
D1209360	36.0	340	530	4
D1209370	37.0	340	530	4
D1209380	38.0	360	555	4
D1209390	39.0	360	555	4
D1209400	40.0	360	555	4
D1209410	41.0	360	555	4
D1209420	42.0	360	555	4
D1209430	43.0	385	585	4
D1209440	44.0	385	585	4
D1209450	45.0	385	585	4
D1209460	46.0	385	585	4
D1209470	47.0	385	585	4
D1209480	48.0	405	605	4
D1209490	49.0	405	605	4
D1209500	50.0	405	605	4

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○								○					○					



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING



SOLID CARBIDE & HSSCo8

NC-SPOTTING DRILLS

NC-ANBOHRER

- For Centering and Chamfering of Holes
- Zum Zentrieren und Anfasen von Bohrungen

SELECTION GUIDE



SERIES	D5306 D5307	D5320	D2306 D2321
POINT ANGLE	90° / 120°	142°	90°
SIZE MIN	D6.0	D3.0	D3.0
SIZE MAX	D20.0	D20.0	D20.0
PAGE	300	301	302
SURFACE TREATMENT	Bright		

SOLID CARBIDE & HSSCo8 NC-SPOTTING DRILLS

For Centering and Chamfering of Holes



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P:305

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	D5306 D5307	D5320	D2306 D2321	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	
	4		About 0.75% C Annealed	270	28				
	5		About 0.75% C Quenched & Tempered	300	32				
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	
	7		Quenched & Tempered	275	29	○	○	○	
	8		Quenched & Tempered	300	32				
	9		Quenched & Tempered	350	38				
	10		High alloyed steel, and tool steel	Annealed	200	15			
	11			Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	
	18		Pearlitic	250	25				
	19		Ferritic	130					
20	Malleable cast iron	Pearlitic	230	21					
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	
	22		Curable Hardened	100		○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	29								
	30	Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15				
	32		Cured	280	30				
	33		Annealed	250	25				
	34		Ni or Co Based Cured	350	38				
	35	Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○		
	37		Alpha + Beta Alloys Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55				
	39		Hardened	630	60				
	40	Hardened Cast Iron	Cast	400	42				
	41		Hardened	550	55				

D2307 D2322	D2320 D2323
120°	142°
D3.0 / D6.0	D3.0 / D6.0
D20.0 / D12.0	D20.0 / D12.0
303	304
Bright	



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	D2307 D2322	D2320 D2323	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	
	7		Quenched & Tempered	275	29	○	○	
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11			Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	
	18		Pearlitic	250	25			
	19		Ferritic	130				
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	
	22		Curable Hardened	100		○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	29							
	30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35	Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Hardened Cast Iron	Cast	400	42			
	41		Hardened	550	55			

YTG NC-SPOTTING DRILLS

D5306 SERIES


D5307 SERIES

CARBIDE, NC-SPOTTING DRILLS 90°, 120°

- VOLLHARTMETALL NC-ANBOHRER 90°, 120°
- Forets carbure à pointer NC 90°, 120°
- PUNTE IN MD A CENTRARE NC 90°, 120°

► **Application** : For more precise centering work on NC/CNC machines. The large diameter of the tool permits chamfering work after centering continuously.

► **Verwendung** : Auf NC-Maschinen, Lehrenbohrwerken u.a. kapitalintensiven Bohrwerken, zum Zentrieren und Anfasen von Gewindebohrungen in einem Arbeitsgang. Besonders geeignet zum Anbohren von hochfesten Stählen, Stahlguß, Grauguß, Hartguß, Mangan-Hartstahl, CrNi-Stählen, Bronze, Leicht- und Buntmetallen.

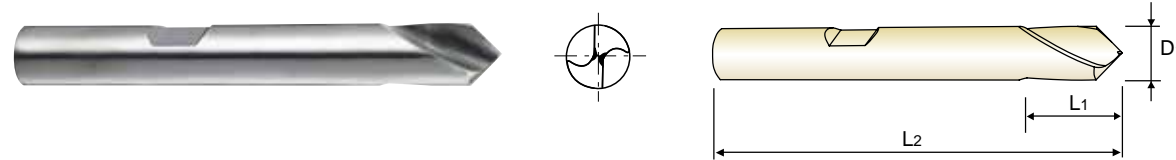

NC-Spotting drills 90° NC-Anbohrer 90°

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5306060	6.0	13	50
D5306080	8.0	23	60
D5306100	10.0	24	70
D5306120	12.0	24	70
D5306160	16.0	29	75
D5306200	20.0	35	100

NC-Spotting drills 120° NC-Anbohrer 120°

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5307060	6.0	13	50
D5307080	8.0	23	60
D5307100	10.0	24	70
D5307120	12.0	24	70
D5307160	16.0	29	75
D5307200	20.0	35	100

► TiN(D6306, D6307), TiCN(DG306, DG307) and TiAlN(DH306, DH307) are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YTG NC-SPOTTING DRILLS


D5320 SERIES

CARBIDE, NC-SPOTTING DRILLS 142°

- VOLLHARTMETALL NC-ANBOHRER 142°
- Forets carbure à pointer NC 142°
- PUNTE IN MD A CENTRARE NC 142°

► **Application** : For more precise centering work on NC/CNC machines. The large diameter of the tool permits chamfering work after centering continuously.

► **Verwendung** : Auf NC-Maschinen, Lehrenbohrwerken u.a. kapitalintensiven Bohrwerken, zum Zentrieren und Anfasen von Gewindebohrungen in einem Arbeitsgang. Besonders geeignet zum Anbohren von hochfesten Stählen, Stahlguß, Grauguß, Hartguß, Mangan-Hartstahl, CrNi-Stählen, Bronze, Leicht- und Buntmetallen.

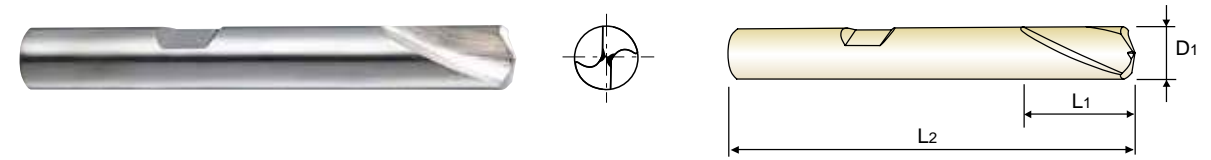

NC-Spotting drills 142° NC-Anbohrer 142°

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5320030	3.0	8	32
D5320040	4.0	10	40
D5320050	5.0	13	50
D5320060	6.0	13	50
D5320080	8.0	23	60
D5320100	10.0	24	70
D5320120	12.0	24	70
D5320160	16.0	29	75
D5320200	20.0	35	100

● with plain shank

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y/G NC-SPOTTING DRILLS

D2306 SERIES


D2321 SERIES

HSSCo8, NC-SPOTTING DRILLS 90°

- HSSCo8, NC-ANBOHRER 90°
- Forets HSSCo8 à pointer NC 90°
- PUNTE A CENTRARE NC 90°, HSSCo8

► **Application** : For more precise centering work on NC/CNC Machines.
The large diameter of the tool permits chamfering work after centering continuously.

► **Verwendung** : Für positionsgenaueres und schnelles Anbohren mit NC/CNC-Maschinen und Bearbeitungszentren, die Ausführung mit Spitzenwinkel 90° ermöglicht sowohl ein Zentrieren, als auch das Vorbohren für einen nächstgrößeren Durchmesser.

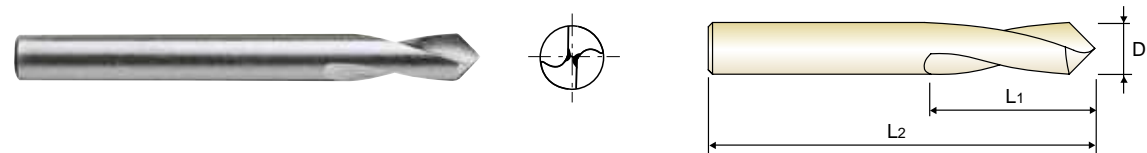

NC HSS Co8 h6 h6 90° P.305-306

LONG LENGTH

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2306030	3.0	12	46
D2306040	4.0	12	55
D2306050	5.0	15	60
D2306060	6.0	20	66
D2306080	8.0	25	79
D2306100	10.0	25	89
D2306120	12.0	30	102
D2306160	16.0	35	115
D2306200	20.0	40	131

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2321030	3.0	12	80
D2321040	4.0	12	100
D2321050	5.0	15	120
D2321060	6.0	20	140
D2321080	8.0	25	140
D2321100	10.0	25	170
D2321120	12.0	30	170
D2321160	16.0	35	200
D2321200	20.0	40	200

► TiN, TiCN and TiAlN are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Y/G NC-SPOTTING DRILLS

D2307 SERIES


D2322 SERIES

HSSCo8, NC-SPOTTING DRILLS 120°

- HSSCo8, NC-ANBOHRER 120°
- Forets HSSCo8 à pointer NC 120°
- PUNTE A CENTRARE NC 120°, HSSCo8

► **Application** : For more precise centering work on NC/CNC Machines.
The large diameter of the tool permits chamfering work after centering continuously.

► **Verwendung** : Für positionsgenaueres und schnelles Anbohren mit NC/CNC-Maschinen und Bearbeitungszentren, die Ausführung mit Spitzenwinkel 90° ermöglicht sowohl ein Zentrieren, als auch das Vorbohren für einen nächstgrößeren Durchmesser.

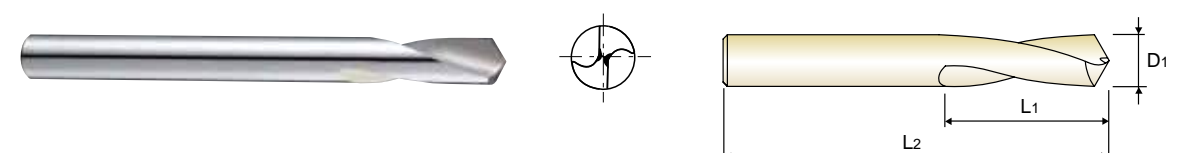

NC HSS Co8 h6 h6 120° P.305-306

LONG LENGTH

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2307030	3.0	12	46
D2307040	4.0	12	55
D2307050	5.0	15	60
D2307060	6.0	20	66
D2307080	8.0	25	79
D2307100	10.0	25	89
D2307120	12.0	30	102
D2307160	16.0	35	115
D2307200	20.0	40	131

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2322060	6.0	20	140
D2322080	8.0	25	140
D2322100	10.0	25	170
D2322120	12.0	30	170

► TiN, TiCN and TiAlN are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, NC-SPOTTING DRILLS 142°

- HSSCo8, NC-ANBOHRER 142°
- Forets HSSCo8 à pointer NC 142°
- PUNTE A CENTRARE NC 142°, HSSCo8

► **Application** : For more precise centering work on NC/CNC Machines. The large diameter of the tool permits chamfering work after centering continuously.

► **Verwendung** : Für positionsgenau und schnelles Anbohren mit NC/CNC-Maschinen und Bearbeitungszentren, die Ausführung mit Spitzenwinkel 90° ermöglicht sowohl ein Zentrieren, als auch das Vorbohren für einen nächstgrößeren Durchmesser.

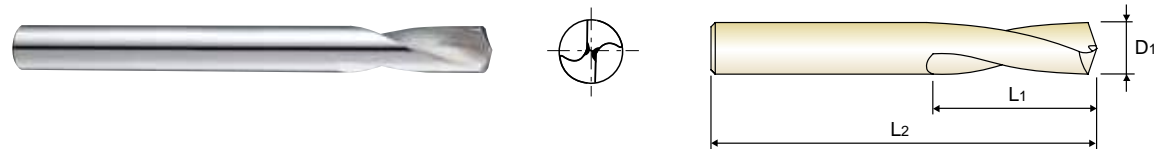

LONG LENGTH

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2320030	3.0	12	46
D2320040	4.0	12	55
D2320050	5.0	15	60
D2320060	6.0	20	66
D2320080	8.0	25	79
D2320100	10.0	25	89
D2320120	12.0	30	102
D2320160	16.0	35	115
D2320200	20.0	40	131

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2323060	6.0	20	140
D2323080	8.0	25	140
D2323100	10.0	25	170
D2323120	12.0	30	170

► TiN, TiCN and TiAlN are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	130	135	140	145	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220
HB	125	130	135	140	145	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155	160
HB	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155	160
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

D5306, D5307, D5320 SERIES CARBIDE, NC-SPOTTING DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)									
					2.0	3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0	
P	1	Non-alloy steel	75	RPM	11940	7960	5970	3980	2980	2390	1990	1490	1190	
	2		FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21		
	3		RPM	11140	7430	5570	3710	2790	2230	1860	1390	1110		
	4		FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21		
	5		RPM	10350	6900	5170	3450	2590	2070	1720	1290	1030		
	6	Low alloy steel	70	RPM	11140	7430	5570	3710	2790	2230	1860	1390	1110	
	7		FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21		
	8		RPM	8750	5840	4380	2920	2190	1750	1460	1090	880		
	9		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19		
	10		High alloyed steel, and tool steel											
	11													
M	12	Stainless steel	35	RPM	5570	3710	2790	1860	1390	1110	930	700	560	
	13		FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21		
	14													
K	15	Grey cast iron	90	RPM	14320	9550	7160	4770	3580	2860	2390	1790	1430	
	16		FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28		
	17	Nodular cast iron	70	RPM	11140	7430	5570	3710	2790	2230	1860	1390	1110	
	18		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19		
	19	Malleable cast iron	90	RPM	14320	9550	7160	4770	3580	2860	2390	1790	1430	
	20		FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28		
N	21	Aluminum-wrought alloy	165	RPM	26260	17510	13130	8750	6570	5250	4380	3280	2630	
	22		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31		
	23	Aluminum-cast, alloyed	130	RPM	20690	13790	10350	6900	5170	4140	3450	2590	2070	
	24		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31		
	25		110	RPM	17510	11670	8750	5840	4380	3500	2920	2190	1750	
	26		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31		
	27		Copper and Copper Alloys (Bronze / Brass)											
	28													
	29		Non Metallic Materials											
	30													
S	31	Heat Resistant Super Alloys												
	32													
	33													
	34													
	35													
	36		Titanium Alloys	35	RPM	5570	3710	2790	1860	1390	1110	930	700	560
	37			FEED	0.01-0.03	0.03-0.05	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	
H	38	Hardened steel												
	39													
	40		Chilled Cast Iron											
	41			Hardened Cast Iron										

D2320, D2321, D2322, D2323, D2306, D2307 SERIES

HSSCo8, NC-SPOTTING DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)									
					2.0	3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0	
P	1	Non-alloy steel	25	RPM	3980	2650	1990	1330	990	800	660	500	400	
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21	
				RPM	3980	2650	1990	1330	990	800	660	500	400	
	2		15	RPM	2390	1590	1190	800	600	480	400	300	240	
				FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	
				RPM	2390	1590	1190	800	600	480	400	300	240	
	3		20	RPM	3180	2120	1590	1060	800	640	530	400	320	
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21	
				RPM	2390	1590	1190	800	600	480	400	300	240	
	4		15	RPM	2390	1590	1190	800	600	480	400	300	240	
				FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	
RPM		2390		1590	1190	800	600	480	400	300	240			
5	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
6	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
7	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
8	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
9	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
10	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
11	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	2390	1590	1190	800	600	480	400	300	240			
M	12	Stainless steel	15	RPM	2390	1590	1190	800	600	480	400	300	240	
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21	
				RPM	2390	1590	1190	800	600	480	400	300	240	
13	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21			
		RPM	2390	1590	1190	800	600	480	400	300	240			
14	15	RPM	2390	1590	1190	800	600	480	400	300	240			
		FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21			
		RPM	2390	1590	1190	800	600	480	400	300	240			
K	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190	950	800	600	480	
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28	
				RPM	3980	2650	1990	1330	990	800	660	500	400	
16	25	RPM	4770	3180	2390	1590	1190	950	800	600	480			
		FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
		RPM	4770	3180	2390	1590	1190	950	800	600	480			
17	30	Nodular cast iron	30	RPM	4770	3180	2390	1590	1190	950	800	600	480	
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28	
				RPM	4770	3180	2390	1590	1190	950	800	600	480	
18	20	Malleable cast iron	20	RPM	3180	2120	1590	1060	800	640	530	400	320	
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28	
				RPM	3180	2120	1590	1060	800	640	530	400	320	
N	21	Aluminum-wrought alloy	65	RPM	10350	6900	5170	3450	2590	2070	1720	1290	1030	
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31	
				RPM	9550	6370	4770	3180	2390	1910	1590	1190	950	
22	60	RPM	9550	6370	4770	3180	2390	1910	1590	1190	950			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
23	50	Aluminum-cast, alloyed	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800	
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31	
				RPM	7960	5310	3980	2650	1990	1590	1330	990	800	
24	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
25	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
26	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
27	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
28	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
29	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
S	31	Heat Resistant Super Alloys	31	RPM	7960	5310	3980	2650	1990	1590	1330	990	800	
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31	
				RPM	7960	5310	3980	2650	1990	1590	1330	990	800	
32	31	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
33	31	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
34	31	RPM	7960	5310	3980	2650	1990	1590	1330	990	800			
		FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31			
		RPM	7960	5310	3980	2650	1990	1590	1330	990	800			

SELECTION GUIDE



SERIES	D5303	DV303	DV333
TOOL MATERIAL	CARBIDE	HSS-E	HSS-E
TYPE	FORM A	FORM A	FORM A
SIZE MIN	D1.0	D0.5	D1.6
SIZE MAX	D6.3	D6.3	D6.3
PAGE	310	311	311

SURFACE TREATMENT Bright


SOLID CARBIDE, HSS & HSS-E CENTER DRILLS

For General Purpose

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.317

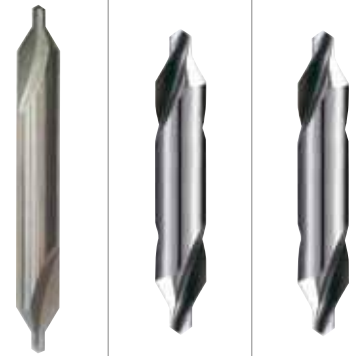

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	D5303	DV303	DV333
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	○	○
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	○	○	○
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11	Quenched & Tempered		325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○
	18		Pearlitic	250	25			
	19		Ferritic	130				
20	Malleable cast iron	Pearlitic	230	21	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60				
	22		Curable Hardened	100				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35		Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41		Hardened	550	55			

DV334	D1303	D1343	D1313	D1353	D1363	D1373	DV383
HSS-E	HSS	HSS	HSS	HSS	HSS	HSS	HSS-E
FORM A	FORM A	FORM A	FORM B	FORM B	FORM R	FORM R	FORM R
D1.0	D0.5	D0.5	D1.0	D2.0	D0.5	D0.8	D1.6
D5.0	D10.0	D8.0	D6.3	D6.3	D8.0	D5.0	D6.3
312	313	313	314	314	315	315	316

Bright




◎	◎	◎	◎	◎	◎	◎	◎	◎	1
◎	◎	◎	◎	◎	◎	◎	◎	◎	2
○	○	○	○	○	○	○	○	○	3
									4
									5
◎	◎	◎	◎	◎	◎	◎	◎	◎	6
○	○	○	○	○	○	○	○	○	7
									8
									9
									10
									11
○	○	○	○	○	○	○	○	○	12
									13
									14
◎	◎	◎	◎	◎	◎	◎	◎	◎	15
○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	19
									20
									21
									22
									23
									24
									25
									26
									27
									28
									29
									30
									31
									32
									33
									34
									35
									36
									37
									38
									39
									40
									41



D5303 SERIES

CARBIDE, CENTER DRILLS / FORM A


- VOLLHARTMETALL, ZENTRIERBOHRER / FORM A
- Forets carbure à centrer / Forme A
- PUNTE A CENTRARE IN MD / FORMA A

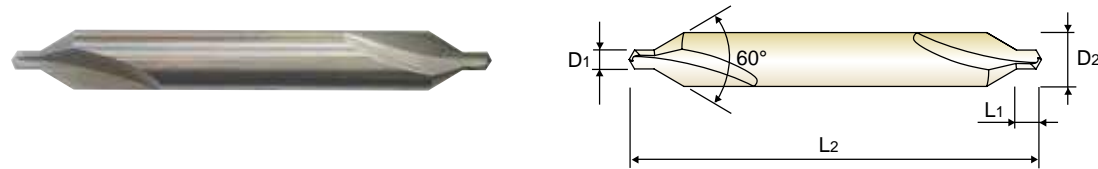

FORM A (60°)

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D5303010	1.0	3.15	1.3	31.5
D5303912	1.25	3.15	1.6	31.5
D5303016	1.6	4	2	35.5
D5303020	2.0	5	2.5	40
D5303025	2.5	6.3	3.1	45
D5303931	3.15	8	3.9	50
D5303040	4.0	10	5	56
D5303050	5.0	12.5	6.3	63
D5303063	6.3	16	8	71



◎ : Excellent ○ : Good

ISO Material Description	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	15	26	3	25	25	21	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	240	180	180	260	160	250	130	230	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N						S						H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	400	550	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




DV303 SERIES

DV333 SERIES

HSS-E, CENTER DRILLS / FORM A

- HSS-EX, ZENTRIERBOHRER / FORM A
- Forets HSS-EX à centrer / Forme A
- PUNTE A CENTRARE PER TORNII IN HSS-EX / FORMA A

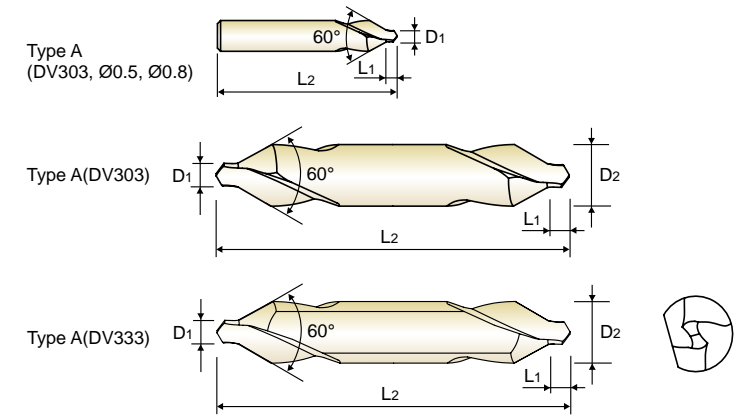


FORM A (60°)

FORM A (60°), FLAT

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
DV303005	0.5	3.15	0.8	25
DV303008	0.8	3.15	1.1	25
DV303010	1.0	3.15	1.3	31.5
DV303912	1.25	3.15	1.6	31.5
DV303016	1.6	4	2	35.5
DV303020	2.0	5	2.5	40
DV303025	2.5	6.3	3.1	45
DV303931	3.15	8	3.9	50
DV303040	4.0	10	5	56
DV303050	5.0	12.5	6.3	63
DV303063	6.3	16	8	71

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
DV333016	1.6	4	2	35.5
DV333020	2.0	5	2.5	40
DV333025	2.5	6.3	3.1	45
DV333931	3.15	8	3.9	50
DV333040	4.0	10	5	56
DV333050	5.0	12.5	6.3	63
DV333063	6.3	16	8	71



▶ Under 1.0mm : Single End


◎ : Excellent ○ : Good

ISO Material Description	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	15	26	3	25	25	21	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	240	180	180	260	160	250	130	230	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N						S						H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	400	550	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS-E, CENTER DRILLS EXTRA LONG / FORM A


- HSS-EX, ZENTRIERBOHRER / FORM A
- Forets HSS-EX à centrer / Forme A, série extra-longue
- PUNTE A CENTRARE PER TORNII IN HSS-EX / FORMA A

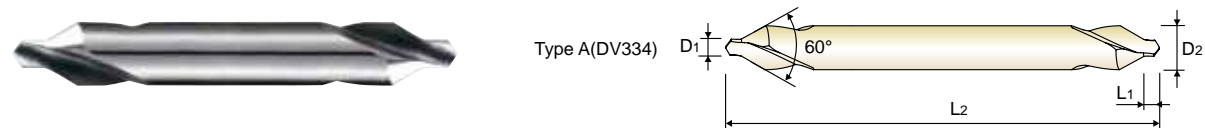

EXTRA LONG / FORM A (60°)

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
DV334010	1.0	4	1.3	120
DV334016	1.6	5	2	120
DV334020	2.0	6	2.5	120
DV334025	2.5	8	3.1	120
DV334931	3.15	10	3.9	120
DV334040	4.0	12	5	120
DV334050	5.0	14	6.3	120




◎ : Excellent ○ : Good

ISO Material Description	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	20	26	3	25	25	21	130	210	210	210	210
HB	125	190	250	270	300	180	275	300	350	350	200	325	200	240	180	260	160	250	130	230	130	230	230	230	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	400	550	550
Recommended																								

HSS, CENTER DRILLS / FORM A

- HSS, ZENTRIERBOHRER / FORM A
- Forets HSS à centrer / Forme A
- PUNTE A CENTRARE PER TORNII IN HSS / FORMA A

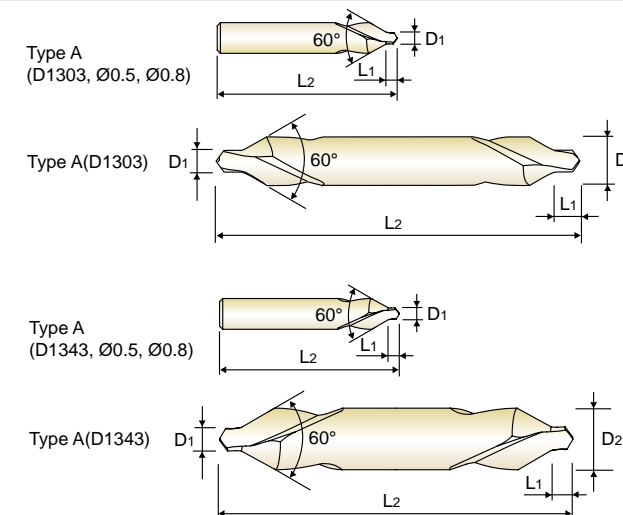

FORM A (60°)

LEFT HELIX / FORM A (60°)


Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D1303005	0.5	3.15	0.8	25
D1303008	0.8	3.15	1.1	25
D1303010	1.0	3.15	1.3	31.5
D1303912	1.25	3.15	1.6	31.5
D1303016	1.6	4	2	35.5
D1303020	2.0	5	2.5	40
D1303025	2.5	6.3	3.1	45
D1303931	3.15	8	3.9	50
D1303040	4.0	10	5	56
D1303050	5.0	12.5	6.3	63
D1303063	6.3	16	8	71
D1303080	8.0	20	10.1	80
D1303100	10.0	25	12.8	100

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D1343005	0.5	3.15	0.8	25
D1343008	0.8	3.15	1.1	25
D1343010	1.0	3.15	1.3	31.5
D1343912	1.25	3.15	1.6	31.5
D1343016	1.6	4	2	35.5
D1343020	2.0	5	2.5	40
D1343025	2.5	6.3	3.1	45
D1343931	3.15	8	3.9	50
D1343040	4.0	10	5	56
D1343050	5.0	12.5	6.3	63
D1343063	6.3	16	8	71
D1343080	8.0	20	10.1	80

► Under 1.0mm : Single End

► Under 1.0mm : Single End



◎ : Excellent ○ : Good

ISO Material Description	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	20	26	3	25	25	21	130	210	210	210	210
HB	125	190	250	270	300	180	275	300	350	350	200	325	200	240	180	260	160	250	130	230	130	230	230	230	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	400	550	550
Recommended																								




D1313 SERIES

D1353 SERIES

HSS, CENTER DRILLS / FORM B

- HSS, ZENTRIERBOHRER / FORM B
- Forets HSS à centrer / Forme B
- PUNTE A CENTRARE PER TORNII IN HSS / FORMA B

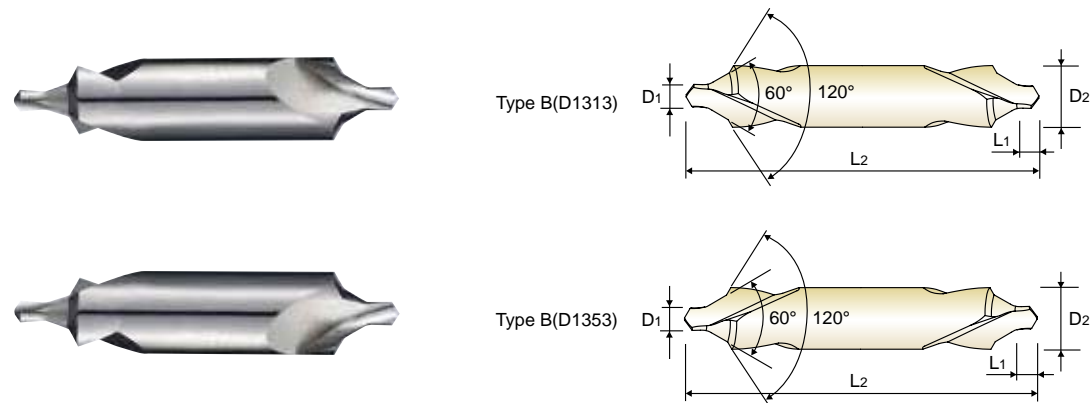


FORM B (60° + 120°)

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D1313010	1.0	4	1.3	35.5
D1313912	1.25	5	1.6	40
D1313016	1.6	6.3	2	45
D1313020	2.0	8	2.5	50
D1313025	2.5	10	3.1	55
D1313931	3.15	11.2	3.9	60
D1313040	4.0	14	5	67
D1313050	5.0	18	6.3	75
D1313063	6.3	20	8	80

LEFT HELIX / FORM B (60° + 120°)

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D1353020	2.0	8	2.5	50
D1353025	2.5	10	3.1	55
D1353931	3.15	11.2	3.9	60
D1353040	4.0	14	5	67
D1353063	6.3	20	8	80



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




D1363 SERIES

D1373 SERIES

HSS, CENTER DRILLS / FORM R

- HSS, ZENTRIERBOHRER / FORM R
- Forets HSS à centrer / Forme R
- PUNTE A CENTRARE PER TORNII IN HSS / FORMA R

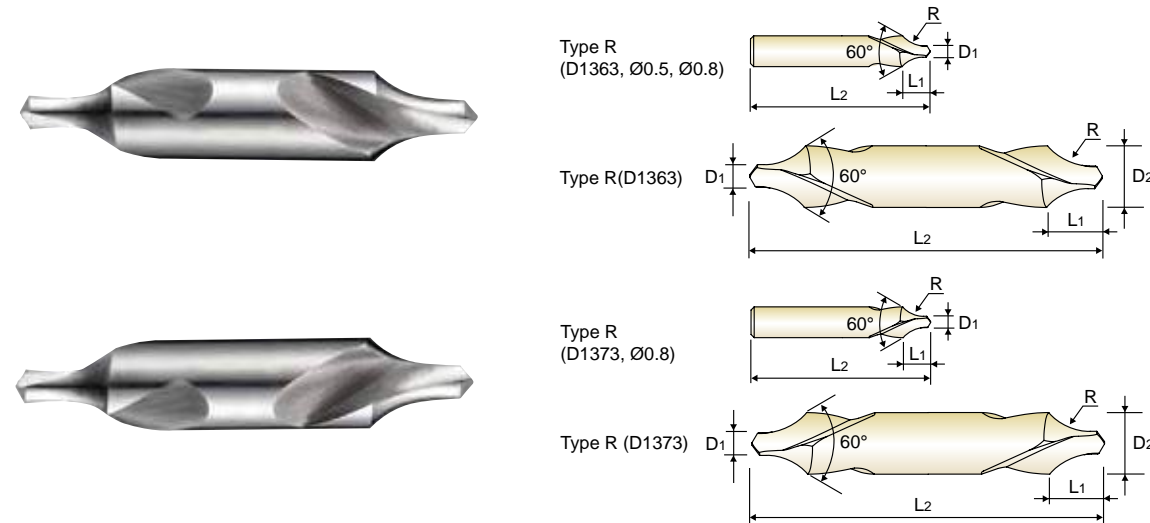

FORM R


EDP No.	Drill Diameter	Shank Diameter	Pilot Length (Include Radius)	Overall Length	Radius
	D1	D2	L1	L2	R
D1363005	0.5	3.15	2.12	25	1.25
D1363008	0.8	3.15	2.65	25	2
D1363010	1.0	3.15	3	31.5	2.5
D1363912	1.25	3.15	3.35	31.5	3.15
D1363016	1.6	4	4.25	35.5	4
D1363020	2.0	5	5.3	40	5
D1363025	2.5	6.3	6.7	45	6.3
D1363931	3.15	8	8.5	50	8
D1363040	4.0	10	10.6	56	10
D1363050	5.0	12.5	13.2	63	12.5
D1363063	6.3	16	17	71	16
D1363080	8.0	20	21.2	80	20

► Under 1.0mm : Single End

LEFT HELIX / FORM R

EDP No.	Drill Diameter	Shank Diameter	Pilot Length (Include Radius)	Overall Length	Radius
	D1	D2	L1	L2	R
D1373008	0.8	3.15	2.65	25	2
D1373010	1.0	3.15	3	31.5	2.5
D1373912	1.25	3.15	3.35	31.5	3.15
D1373016	1.6	4	4.25	35.5	4
D1373020	2.0	5	5.3	40	5
D1373025	2.5	6.3	6.7	45	6.3
D1373931	3.15	8	8.5	50	8
D1373040	4.0	10	10.6	56	10
D1373050	5.0	12.5	13.2	63	12.5

► Under 1.0mm : Single End



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○


ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



DV383 SERIES

HSS-E, CENTER DRILLS / FORM R


- HSS-EX, ZENTRIERBOHRER / FORM R
- Forets HSS-EX à centre / Forme R
- PUNTE A CENTRARE PER TORNII IN HSS-EX / FORMA R

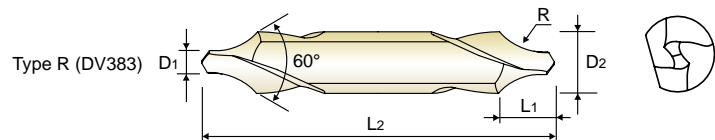

FORM R / FLAT

Unit : mm

EDP No.	Drill Diameter D1	Shank Diameter D2	Pilot Length (Include Radius) L1	Overall Length L2	Radius R
DV383016	1.6	4	4.25	35.5	4
DV383020	2.0	5	5.3	40	5
DV383025	2.5	6.3	6.7	45	6.3
DV383931	3.15	8	8.5	50	8
DV383040	4.0	10	10.6	56	10
DV383050	5.0	12.5	13.2	63	12.5
DV383063	6.3	16	17	71	16



◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N				S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



RECOMMENDED CUTTING CONDITIONS
EMPOFOHLENE SCHNEIDKONDITIONEN

D5303 SERIES CARBIDE, CENTER DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)						
					1.0	2.0	3.0	4.0	5.0	6.0	
P	1	Non-alloy steel	50	RPM FEED	15920 0.02-0.04	7960 0.03-0.06	5310 0.04-0.08	3980 0.05-0.09	3180 0.06-0.10	2650 0.07-0.12	
	2		40	RPM FEED	12730 0.02-0.04	6370 0.03-0.06	4240 0.04-0.08	3180 0.05-0.09	2550 0.06-0.10	2120 0.07-0.12	
	3		30	RPM FEED	9550 0.01-0.03	4770 0.01-0.035	3180 0.015-0.05	2390 0.02-0.06	1910 0.03-0.07	1590 0.04-0.08	
	4										
	5										
	6	Low alloy steel	40	RPM FEED	12730 0.02-0.04	6370 0.03-0.06	4240 0.04-0.08	3180 0.05-0.09	2550 0.06-0.10	2120 0.07-0.12	
	7		30	RPM FEED	9550 0.01-0.03	4770 0.01-0.035	3180 0.015-0.05	2390 0.02-0.06	1910 0.03-0.07	1590 0.04-0.08	
	8										
	9										
	10	High alloyed steel, and tool steel									
	11										
M	12	Stainless steel	20	RPM FEED	6370 0.01-0.03	3180 0.01-0.035	2120 0.015-0.05	1590 0.02-0.06	1270 0.03-0.07	1060 0.04-0.08	
	13										
	14										
K	15	Grey cast iron	60	RPM FEED	19100 0.02-0.04	9550 0.03-0.06	6370 0.04-0.08	4770 0.05-0.09	3820 0.06-0.10	3180 0.07-0.12	
	16		50	RPM FEED	15920 0.01-0.03	7960 0.01-0.035	5310 0.015-0.05	3980 0.02-0.06	3180 0.03-0.07	2650 0.04-0.08	
	17	Nodular cast iron	60	RPM FEED	19100 0.02-0.04	9550 0.03-0.06	6370 0.04-0.08	4770 0.05-0.09	3820 0.06-0.10	3180 0.07-0.12	
	18										
	19	Malleable cast iron	40	RPM FEED	12730 0.02-0.04	6370 0.03-0.06	4240 0.04-0.08	3180 0.05-0.09	2550 0.06-0.10	2120 0.07-0.12	
	20										
N	21	Aluminum-wrought alloy									
	22										
	23	Aluminum-cast, alloyed									
	24										
	25										
	26										
	27		Copper and Copper Alloys (Bronze / Brass)								
	28										
	29		Non Metallic Materials								
	30										
S	31	Heat Resistant Super Alloys									
	32										
	33										
	34										
	35										
	36		Titanium Alloys								
	37										
H	38	Hardened steel									
	39										
	40		Chilled Cast Iron								
	41		Hardened Cast Iron								

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					1.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0
P	1	Non-alloy steel	40	RPM	12730	6370	4240	3180	2550	2120	1590	1270
	2		FEED	0.02-0.04	0.03-0.06	0.04-0.08	0.05-0.09	0.06-0.10	0.07-0.12	0.09-0.15	0.12-0.18	
	3		RPM	9550	4770	3180	2390	1910	1590	1190	950	
	4		FEED	0.02-0.04	0.03-0.06	0.04-0.08	0.05-0.09	0.06-0.10	0.07-0.12	0.09-0.15	0.12-0.18	
	5		FEED	0.01-0.03	0.01-0.035	0.015-0.05	0.02-0.06	0.03-0.07	0.04-0.08	0.06-0.12	0.08-0.14	
	6	Low alloy steel	30	RPM	9550	4770	3180	2390	1910	1590	1190	950
	7		FEED	0.02-0.04	0.03-0.06	0.04-0.08	0.05-0.09	0.06-0.10	0.07-0.12	0.09-0.15	0.12-0.18	
	8		RPM	6370	3180	2120	1590	1270	1060	800	640	
	9		FEED	0.01-0.03	0.01-0.035	0.015-0.05	0.02-0.06	0.03-0.07	0.04-0.08	0.06-0.12	0.08-0.14	
	10		High alloyed steel, and tool steel									
	11											
M	12	Stainless steel	10	RPM	3180	1590	1060	800	640	530	400	320
	13		FEED	0.01-0.03	0.01-0.035	0.015-0.05	0.02-0.06	0.03-0.07	0.04-0.08	0.06-0.12	0.08-0.14	
	14											
K	15	Grey cast iron	40	RPM	12730	6370	4240	3180	2550	2120	1590	1270
	16		FEED	0.02-0.04	0.03-0.06	0.04-0.08	0.05-0.09	0.06-0.10	0.07-0.12	0.09-0.15	0.12-0.18	
	17	Nodular cast iron	30	RPM	9550	4770	3180	2390	1910	1590	1190	950
	18		FEED	0.01-0.03	0.01-0.035	0.015-0.05	0.02-0.06	0.03-0.07	0.04-0.08	0.06-0.12	0.08-0.14	
	19		RPM	12730	6370	4240	3180	2550	2120	1590	1270	
20	Malleable cast iron	25	FEED	0.02-0.04	0.03-0.06	0.04-0.08	0.05-0.09	0.06-0.10	0.07-0.12	0.09-0.15	0.12-0.18	
N	21	Aluminum-wrought alloy										
	22											
	23											
	24	Aluminum-cast, alloyed										
	25											
	26											
	27	Copper and Copper Alloys (Bronze / Brass)										
	28											
	29											
	30	Non Metallic Materials										
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35											
	36	Titanium Alloys										
	37											
H	38	Hardened steel										
	39											
	40		Chilled Cast Iron									
	41		Hardened Cast Iron									



Leading Through Innovation



INSERTS & HOLDERS

SPADE DRILLS

BOHRMESSER

- For General Machines and Drilling Large Diameters
Longer Tool Life and High Productivity

- Für allgemeine Maschinen und zum Bohren großer Durchmesser,
längere Werkzeugstandzeiten und höhere Produktivität

YG SPADE DRILLS


SERIES 1, 2

SPADE DRILL INSERTS - HSS M4

- EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL - HSS M4
- CUSPIDI SPADE DRILL - HSS M4

- ▶ For general use in steels and cast irons.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. HSS M4		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	S1405045	S1410045	S1415045	
		18.00	.7087	S1455180	S1460180	S1465180	
	23/32	18.26	.7188	S1405046	S1410046	S1415046	
		18.50	.7283	S1455185	S1460185	S1465185	
	47/64	18.65	.7344	S1405047	S1410047	S1415047	
		19.00	.7480	S1455190	S1460190	S1465190	
	3/4	19.05	.7500	S1405048	S1410048	S1415048	
		19.45	.7656	S1405049	S1410049	S1415049	
	25/32	19.50	.7677	S1455195	S1460195	S1465195	
		19.84	.7813	S1405050	S1410050	S1415050	
	51/64	20.00	.7874	S1455200	S1460200	S1465200	
		20.24	.7969	S1405051	S1410051	S1415051	
	Ø17.53 (.690) to Ø24.38 (.960)	20.50	.8071	S1455205	S1460205	S1465205	
		20.64	.8125	S1405052	S1410052	S1415052	
	27/32	21.00	.8268	S1455210	S1460210	S1465210	
		21.43	.8438	S1405054	S1410054	S1415054	
	55/64	21.83	.8594	S1405055	S1410055	S1415055	
		22.00	.8661	S1455220	S1460220	S1465220	
	7/8	22.23	.8750	S1405056	S1410056	S1415056	
		22.62	.8906	S1405057	S1410057	S1415057	
29/32	23.00	.9055	S1455230	S1460230	S1465230		
	23.02	.9063	S1405058	S1410058	S1415058		
59/64	23.42	.9219	S1405059	S1410059	S1415059		
	15/16	23.81	.9375	S1405060	S1410060	S1415060	
31/32	24.00	.9449	S1455240	S1460240	S1465240		
	24.61	.9688	S1405062	S1410062	S1415062		
63/64	25.00	.9843	S1455250	S1460250	S1465250		
	1	25.40	1.0000	S1405100	S1410100	S1415100	
Ø24.41 (.961) to Ø35.05 (1.380)	1-1/64	25.80	1.0156	S1405101	S1410101	S1415101	
	26.00	1.0236	S1455260	S1460260	S1465260		
1-1/32	26.19	1.0313	S1405102	S1410102	S1415102		
	26.59	1.0469	S1405103	S1410103	S1415103		
1-3/64	26.99	1.0625	S1405104	S1410104	S1415104		
	27.00	1.0630	S1455270	S1460270	S1465270		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	◎	○

ISO Material Description	N										S					H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎															

YG SPADE DRILLS


SERIES 2, 3

SPADE DRILL INSERTS - HSS M4

- EINWEG BOHREINSATZ - HSS M4
- Plaquettes FORETS A LAME - HSS M4
- CUSPIDI SPADE DRILL - HSS M4

- ▶ For general use in steels and cast irons.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. HSS M4		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	1-3/32	27.78	1.0938	S1405106	S1410106	S1415106	
		28.00	1.1024	S1455280	S1460280	S1465280	
	1-7/64	28.18	1.1094	S1405107	S1410107	S1415107	
		28.58	1.1250	S1405108	S1410108	S1415108	
	1-1/8	29.00	1.1417	S1455290	S1460290	S1465290	
		29.37	1.1563	S1405110	S1410110	S1415110	
	1-5/32	30.00	1.1811	S1455300	S1460300	S1465300	
		30.16	1.1875	S1405112	S1410112	S1415112	
	1-7/32	30.96	1.2188	S1405114	S1410114	S1415114	
		31.00	1.2205	S1455310	S1460310	S1465310	
	1-1/4	31.75	1.2500	S1405116	S1410116	S1415116	
		32.00	1.2598	S1455320	S1460320	S1465320	
	1-9/32	32.54	1.2813	S1405118	S1410118	S1415118	
		33.00	1.2992	S1455330	S1460330	S1465330	
	1-5/16	33.34	1.3125	S1405120	S1410120	S1415120	
		34.00	1.3386	S1455340	S1460340	S1465340	
	1-11/32	34.13	1.3438	S1405122	S1410122	S1415122	
		34.93	1.3750	S1405124	S1410124	S1415124	
	1-3/8	35.00	1.3780	S1455350	S1460350	S1465350	
		35.72	1.4063	S1405126	S1410126	S1415126	
1-13/32	36.00	1.4173	S1455360	S1460360	S1465360		
	36.51	1.4375	S1405128	S1410128	S1415128		
1-7/16	37.00	1.4567	S1455370	S1460370	S1465370		
	37.31	1.4688	S1405130	S1410130	S1415130		
1-15/32	38.00	1.4961	S1455380	S1460380	S1465380		
	38.10	1.5000	S1405132	S1410132	S1415132		
1-1/2	38.89	1.5313	S1455390	S1460390	S1465390		
	39.00	1.5354	S1405134	S1410134	S1415134		
1-17/32	39.69	1.5625	S1455400	S1460400	S1465400		
	40.00	1.5748	S1405136	S1410136	S1415136		
1-9/16	40.48	1.5938	S1455410	S1460410	S1465410		
	41.00	1.6142	S1405138	S1410138	S1415138		
1-19/32	41.28	1.6250	S1455420	S1460420	S1465420		
	42.00	1.6535	S1405140	S1410140	S1415140		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	◎	○

ISO Material Description	N										S					H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎															

Y/G SPADE DRILLS


SERIES 3, 4

SPADE DRILL INSERTS - HSS M4

- EINWEG BOHREINSATZ - HSS M4
- Plaquettes FORETS A LAME - HSS M4
- CUSPIDI SPADE DRILL - HSS M4

► For general use in steels and cast irons.
► Set up time can be reduced due to changing inserts easily on the machine.
► Any non-standard size available.

► Für allgemeine Anwendung in Stahl und Gusseisen
► Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
► Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-21/32	42.07	1.6563	S1405142	S1410142	S1415142	
		42.86	1.6875	S1405144	S1410144	S1415144	
		43.00	1.6929	S1455430	S1460430	S1465430	
	1-23/32	43.66	1.7188	S1405146	S1410146	S1415146	
		44.00	1.7323	S1455440	S1460440	S1465440	
		44.45	1.7500	S1405148	S1410148	S1415148	
	1-3/4	45.00	1.7717	S1455450	S1460450	S1465450	
		45.24	1.7813	S1405150	S1410150	S1415150	
		46.00	1.8110	S1455460	S1460460	S1465460	
	1-13/16	46.04	1.8125	S1405152	S1410152	S1415152	
		46.83	1.8438	S1405154	S1410154	S1415154	
		47.00	1.8504	S1455470	S1460470	S1465470	
	1-7/8	47.63	1.8750	S1405156	S1410156	S1415156	
		48.00	1.8898	S1455480	S1460480	S1465480	
		48.42	1.9063	S1405158	S1410158	S1415158	
	1-29/32	49.00	1.9291	S1455490	S1460490	S1465490	
49.21		1.9375	S1405160	S1410160	S1415160		
50.00		1.9685	S1455500	S1460500	S1465500		
1-31/32	50.01	1.9688	S1405162	S1410162	S1415162		
	50.80	2.0000	S1405200	S1410200	S1415200		
	51.00	2.0079	S1455510	S1460510	S1465510		
2-1/32	51.59	2.0313	S1405202	S1410202	S1415202		
	52.00	2.0472	S1455520	S1460520	S1465520		
	52.39	2.0625	S1405204	S1410204	S1415204		
2-1/16	53.00	2.0866	S1455530	S1460530	S1465530		
	53.18	2.0938	S1405206	S1410206	S1415206		
	53.98	2.1250	S1405208	S1410208	S1415208		
2-3/32	54.00	2.1260	S1455540	S1460540	S1465540		
	54.77	2.1563	S1405210	S1410210	S1415210		
	55.00	2.1654	S1455550	S1460550	S1465550		
2-3/16	55.56	2.1875	S1405212	S1410212	S1415212		
	56.00	2.2047	S1455560	S1460560	S1465560		
	56.36	2.2188	S1405214	S1410214	S1415214		
2-7/32	57.00	2.2441	S1455570	S1460570	S1465570		

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	◎	○		

ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎															

Y/G SPADE DRILLS


SERIES 4, 5

SPADE DRILL INSERTS - HSS M4

- EINWEG BOHREINSATZ - HSS M4
- Plaquettes FORETS A LAME - HSS M4
- CUSPIDI SPADE DRILL - HSS M4

► For general use in steels and cast irons.
► Set up time can be reduced due to changing inserts easily on the machine.
► Any non-standard size available.

► Für allgemeine Anwendung in Stahl und Gusseisen
► Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
► Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
4 Ø46.99 (1.850) to Ø65.28 (2.570)	2-1/4	57.15	2.2500	S1405216	S1410216	S1415216	
		57.94	2.2813	S1405218	S1410218	S1415218	
		58.00	2.2835	S1455580	S1460580	S1465580	
	2-5/16	58.74	2.3125	S1405220	S1410220	S1415220	
		59.00	2.3228	S1455590	S1460590	S1465590	
		59.53	2.3438	S1405222	S1410222	S1415222	
	2-11/32	60.00	2.3622	S1455600	S1460600	S1465600	
		60.33	2.3750	S1405224	S1410224	S1415224	
		61.00	2.4016	S1455610	S1460610	S1465610	
	2-3/8	61.12	2.4063	S1405226	S1410226	S1415226	
		61.91	2.4375	S1405228	S1410228	S1415228	
		62.00	2.4409	S1455620	S1460620	S1465620	
	2-15/32	62.71	2.4688	S1405230	S1410230	S1415230	
		63.00	2.4803	S1455630	S1460630	S1465630	
		63.50	2.5000	S1405232	S1410232	S1415232	
	2-1/2	64.00	2.5197	S1455640	S1460640	S1465640	
64.29		2.5313	S1405234	S1410234	S1415234		
65.00		2.5591	S1455650	S1460650	S1465650		
2-9/16	65.09	2.5625	S1405236	S1410236	S1415236		
	65.50	2.5700	S1405238	S1410238	S1415238		
	66.00	2.5984	S1455660	S1460660	S1465660		
2-17/32	66.68	2.6250	S1405240	S1410240	S1415240		
	67.47	2.6563	S1405242	S1410242	S1415242		
	68.00	2.6772	S1455680	S1460680	S1465680		
2-7/16	68.26	2.6875	S1405244	S1410244	S1415244		
	69.05	2.7188	S1405246	S1410246	S1415246		
	69.85	2.7500	S1405248	S1410248	S1415248		
2-3/4	70.00	2.7559	S1455700	S1460700	S1465700		
	70.64	2.7813	S1405250	S1410250	S1415250		
	71.44	2.8125	S1405252	S1410252	S1415252		

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	◎	○		

ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎															

Y/G SPADE DRILLS


SERIES 5, 6, 7

SPADE DRILL INSERTS - HSS M4

- EINWEG BOHREINSATZ - HSS M4
- Plaquettes FORETS A LAME - HSS M4
- CUSPIDI SPADE DRILL - HSS M4

- ▶ For general use in steels and cast irons.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

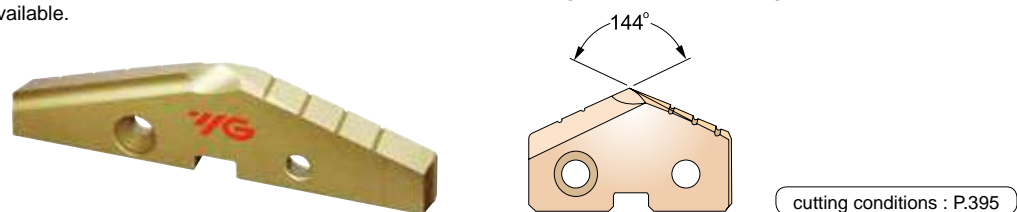

Series	Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. HSS M4		
		Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
5	Ø62.38 (2.456) to Ø76.20 (3.000)	2-27/32	72.00	2.8346	11.1 (7/16)	S1455720	S1460720	S1465720
		2-7/8	72.23	2.8438		S1405254	S1410254	S1415254
		2-29/32	73.03	2.8750		S1405256	S1410256	S1415256
		2-29/32	73.82	2.9063		S1405258	S1410258	S1415258
		2-15/16	74.00	2.9134		S1455740	S1460740	S1465740
		2-31/32	74.61	2.9375		S1405260	S1410260	S1415260
		2-31/32	75.41	2.9688		S1405262	S1410262	S1415262
		3	76.00	2.9921		S1455760	S1460760	S1465760
		3	76.20	3.0000		S1405300	S1410300	S1415300
		6	Ø76.23 (3.001) to Ø89.08 (3.507)	3-1/32		76.99	3.0313	11.1 (7/16)
3-1/16	77.79			3.0625	S1405304	S1410304	S1415304	
3-1/16	78.00			3.0709	S1455780	S1460780	S1465780	
3-3/32	78.58			3.0938	S1405306	S1410306	S1415306	
3-1/8	79.38			3.1250	S1405308	S1410308	S1415308	
3-5/32	80.00			3.1496	S1455800	S1460800	S1465800	
3-5/32	80.17			3.1563	S1405310	S1410310	S1415310	
3-3/16	80.96			3.1875	S1405312	S1410312	S1415312	
3-7/32	81.76			3.2188	S1405314	S1410314	S1415314	
3-1/4	82.00			3.2283	S1455820	S1460820	S1465820	
7	Ø89.08 (3.507) to Ø114.48 (4.507)	3-9/32	82.55	3.2500	11.1 (7/16)	S1405316	S1410316	S1415316
		3-9/32	83.34	3.2813		S1405318	S1410318	S1415318
		3-5/16	84.00	3.3071		S1455840	S1460840	S1465840
		3-5/16	84.14	3.3125		S1405320	S1410320	S1415320
		3-11/32	84.93	3.3438		S1405322	S1410322	S1415322
		3-3/8	85.73	3.3750		S1405324	S1410324	S1415324
		3-13/32	86.00	3.3858		S1455860	S1460860	S1465860
		3-13/32	86.52	3.4063		S1405326	S1410326	S1415326
		3-7/16	87.31	3.4375		S1405328	S1410328	S1415328
		3-7/16	87.31	3.4375		S1455880	S1460880	S1465880
7	Ø101.63 (4.001) to Ø114.48 (4.507)	3-15/32	88.11	3.4688	11.1 (7/16)	S1405330	S1410330	S1415330
		3-1/2	88.90	3.5000		S1405332	S1410332	S1415332
		3-17/32	89.69	3.5313		S1405334	S1410334	S1415334
		3-9/16	90.00	3.5433		S1455900	S1460900	S1465900
		3-9/16	90.49	3.5625		S1405336	S1410336	S1415336

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Y/G SPADE DRILLS


SERIES 7, 8

SPADE DRILL INSERTS - HSS M4

- EINWEG BOHREINSATZ - HSS M4
- Plaquettes FORETS A LAME - HSS M4
- CUSPIDI SPADE DRILL - HSS M4

- ▶ For general use in steels and cast irons.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

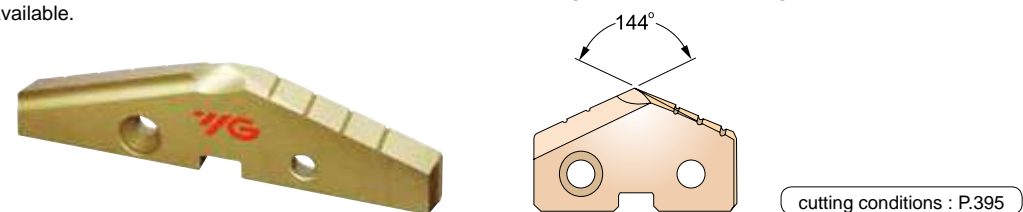

Series	Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. HSS M4		
		Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
7	Ø87.76 (3.455) to Ø101.60 (4.000)	3-19/32	91.28	3.5938	11.1 (7/16)	S1405338	S1410338	S1415338
		3-5/8	92.00	3.6221		S1455920	S1460920	S1465920
		3-5/8	92.08	3.6250		S1405340	S1410340	S1415340
		3-21/32	92.87	3.6563		S1405342	S1410342	S1415342
		3-11/16	93.66	3.6875		S1405344	S1410344	S1415344
		3-11/16	94.00	3.7008		S1455940	S1460940	S1465940
		3-23/32	94.46	3.7188		S1405346	S1410346	S1415346
		3-3/4	95.25	3.7500		S1405348	S1410348	S1415348
		3-3/4	96.00	3.7795		S1455960	S1460960	S1465960
		3-25/32	96.04	3.7813		S1405350	S1410350	S1415350
8	Ø101.63 (4.001) to Ø114.48 (4.507)	3-13/16	96.84	3.8125	11.1 (7/16)	S1405352	S1410352	S1415352
		3-27/32	97.63	3.8438		S1405354	S1410354	S1415354
		3-7/8	98.00	3.8583		S1455980	S1460980	S1465980
		3-7/8	98.43	3.8750		S1405356	S1410356	S1415356
		3-29/32	99.22	3.9063		S1405358	S1410358	S1415358
		3-29/32	100.00	3.9370		S1455A00	S1460A00	S1465A00
		3-15/16	100.01	3.9375		S1405360	S1410360	S1415360
		3-31/32	100.81	3.9688		S1405362	S1410362	S1415362
		4	101.60	4.0000		S1405400	S1410400	S1415400
		4-1/64	102.00	4.0157		S1455A20	S1460A20	S1465A20
8	Ø101.63 (4.001) to Ø114.48 (4.507)	4-1/16	103.19	4.0625	11.1 (7/16)	S1405404	S1410404	S1415404
		4-3/32	104.00	4.0945		S1455A40	S1460A40	S1465A40
		4-1/8	104.78	4.1250		S1405408	S1410408	S1415408
		4-1/8	106.00	4.1732		S1455A60	S1460A60	S1465A60
		4-3/16	106.36	4.1875		S1405412	S1410412	S1415412
		4-1/4	107.95	4.2500		S1405416	S1410416	S1415416
		4-1/4	108.00	4.2520		S1455A80	S1460A80	S1465A80
		4-5/16	109.54	4.3125		S1405420	S1410420	S1415420
		4-5/16	110.00	4.3307		S1455B00	S1460B00	S1465B00
		4-3/8	111.13	4.3750		S1405424	S1410424	S1415424
8	Ø101.63 (4.001) to Ø114.48 (4.507)	4-3/8	112.00	4.4094	11.1 (7/16)	S1455B20	S1460B20	S1465B20
		4-7/16	112.71	4.4375		S1405428	S1410428	S1415428
		4-7/16	114.00	4.4882		S1455B40	S1460B40	S1465B40
		4-1/2	114.30	4.5000		S1405432	S1410432	S1415432

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Y/G SPADE DRILLS


SERIES Y, Z, 0

SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15

- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series	Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
		Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
						TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	9.50	.3740	2.4 (3/32)	S1155095	S1160095	S1165095
		9.53	9.53	.3750		S1105024	S1110024	S1115024
		9.80	9.80	.3860		S1155098	S1160098	S1165098
		9.92	9.92	.3906		S1105025	S1110025	S1115025
		10.00	10.00	.3937		S1155100	S1160100	S1165100
		10.20	10.20	.4016		S1155102	S1160102	S1165102
	25/64	10.32	10.32	.4063		S1105026	S1110026	S1115026
		10.50	10.50	.4134		S1155105	S1160105	S1165105
		10.72	10.72	.4219		S1105027	S1110027	S1115027
		10.80	10.80	.4252		S1155108	S1160108	S1165108
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	11.11	.4375	2.4 (3/32)	S1105028	S1110028	S1115028
		11.50	11.50	.4528		S1155115	S1160115	S1165115
	11.51	11.51	.4531	S1105029		S1110029	S1115029	
	11.91	11.91	.4688	S1105030		S1110030	S1115030	
	12.00	12.00	.4724	S1155120		S1160120	S1165120	
	12.30	12.30	.4844	S1105031		S1110031	S1115031	
	12.50	12.50	.4921	S1155125		S1160125	S1165125	
	12.70	12.70	.5000	S1105032		S1110032	S1115032	
	13.00	13.00	.5118	S1155130		S1160130	S1165130	
	0 Ø12.98 (.511) to Ø17.65 (.695)	33/64	13.10	13.10		.5156	3.2 (1/8)	S1105033
13.49			13.49	.5313	S1105034	S1110034		S1115034
13.50		13.50	.5315	S1155135	S1160135	S1165135		
13.89		13.89	.5469	S1105035	S1110035	S1115035		
14.00		14.00	.5512	S1155140	S1160140	S1165140		
14.29		14.29	.5625	S1105036	S1110036	S1115036		
14.50		14.50	.5709	S1155145	S1160145	S1165145		
14.68		14.68	.5781	S1105037	S1110037	S1115037		
15.00		15.00	.5906	S1155150	S1160150	S1165150		
1/2		15.08	15.08	.5938	S1105038	S1110038		S1115038
	15.48	15.48	.6094	S1105039	S1110039	S1115039		
	15.50	15.50	.6102	S1155155	S1160155	S1165155		
	15.88	15.88	.6250	S1105040	S1110040	S1115040		
	16.00	16.00	.6299	S1155160	S1160160	S1165160		
	16.00	16.00	.6299	S1105040	S1110040	S1115040		

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	◎	◎	○	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				○					◎	○	○	○	○	○	○	○	○	○	○

Y/G SPADE DRILLS


SERIES 0, 1

SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15

- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series	Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
		Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
						TiN	TiCN	TiAlN
0 Ø12.98 (.511) to Ø17.65 (.695)	41/64	16.27	16.27	.6406	3.2 (1/8)	S1105041	S1110041	S1115041
		16.50	16.50	.6496		S1155165	S1160165	S1165165
		16.67	16.67	.6563		S1105042	S1110042	S1115042
		17.00	17.00	.6693		S1155170	S1160170	S1165170
		17.07	17.07	.6719		S1105043	S1110043	S1115043
		17.46	17.46	.6875		S1105044	S1110044	S1115044
	21/32	17.50	17.50	.6890		S1155175	S1160175	S1165175
		17.86	17.86	.7031		S1105045	S1110045	S1115045
		18.00	18.00	.7087		S1155180	S1160180	S1165180
		18.26	18.26	.7188		S1105046	S1110046	S1115046
1 Ø17.53 (.690) to Ø24.38 (.960)	23/32	18.50	18.50	.7283	4.0 (5/32)	S1155185	S1160185	S1165185
		18.65	18.65	.7344		S1105047	S1110047	S1115047
	19.00	19.00	.7480	S1155190		S1160190	S1165190	
	19.05	19.05	.7500	S1105048		S1110048	S1115048	
	19.45	19.45	.7656	S1105049		S1110049	S1115049	
	19.50	19.50	.7677	S1155195		S1160195	S1165195	
	19.84	19.84	.7813	S1105050		S1110050	S1115050	
	20.00	20.00	.7874	S1155200		S1160200	S1165200	
	20.24	20.24	.7969	S1105051		S1110051	S1115051	
	20.50	20.50	.8071	S1155205		S1160205	S1165205	
13/16	20.64	20.64	.8125	S1105052	S1110052	S1115052		
	21.00	21.00	.8268	S1155210	S1160210	S1165210		
	21.43	21.43	.8438	S1105054	S1110054	S1115054		
	21.83	21.83	.8594	S1105055	S1110055	S1115055		
	22.00	22.00	.8661	S1155220	S1160220	S1165220		
	22.23	22.23	.8750	S1105056	S1110056	S1115056		
	22.62	22.62	.8906	S1155057	S1160057	S1165057		
	23.00	23.00	.9055	S1105058	S1110058	S1115058		
	23.02	23.02	.9063	S1155230	S1160230	S1165230		
	23.42	23.42	.9219	S1105059	S1110059	S1115059		
7/8	23.81	23.81	.9375	S1105060	S1110060	S1115060		
	24.00	24.00	.9449	S1155240	S1160240	S1165240		
	24.00	24.00	.9449	S1105060	S1110060	S1115060		
	24.00	24.00	.9449	S1155240	S1160240	S1165240		

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	◎	◎	○	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				○					◎	○	○	○	○	○	○	○	○	○	○

YG SPADE DRILLS


SERIES 2, 3

SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15

- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1105062	S1110062	S1115062
	63/64	25.00	.9843		S1155250	S1160250	S1165250
	1	25.40	1.0000		S1105100	S1110100	S1115100
	1-1/64	25.80	1.0156		S1105101	S1110101	S1115101
		26.00	1.0236		S1155260	S1160260	S1165260
	1-1/32	26.19	1.0313		S1105102	S1110102	S1115102
	1-3/64	26.59	1.0469		S1105103	S1110103	S1115103
	1-1/16	26.99	1.0625		S1105104	S1110104	S1115104
		27.00	1.0630		S1155270	S1160270	S1165270
	1-3/32	27.78	1.0938		S1105106	S1110106	S1115106
		28.00	1.1024		S1155280	S1160280	S1165280
	1-7/64	28.18	1.1094		S1105107	S1110107	S1115107
	1-1/8	28.58	1.1250		S1105108	S1110108	S1115108
		29.00	1.1417		S1155290	S1160290	S1165290
	1-5/32	29.37	1.1563		S1105110	S1110110	S1115110
		30.00	1.1811		S1155300	S1160300	S1165300
	1-3/16	30.16	1.1875		S1105112	S1110112	S1115112
	1-7/32	30.96	1.2188		S1105114	S1110114	S1115114
		31.00	1.2205		S1155310	S1160310	S1165310
	1-1/4	31.75	1.2500		S1105116	S1110116	S1115116
	32.00	1.2598	S1155320	S1160320	S1165320		
1-9/32	32.54	1.2813	S1105118	S1110118	S1115118		
1-5/16	33.00	1.2992	S1155330	S1160330	S1165330		
	33.34	1.3125	S1105120	S1110120	S1115120		
	34.00	1.3386	S1155340	S1160340	S1165340		
1-11/32	34.13	1.3438	S1105122	S1110122	S1115122		
1-3/8	34.93	1.3750	S1105124	S1110124	S1115124		
	35.00	1.3780	S1155350	S1160350	S1165350		
3 Ø34.37(1.353) to Ø47.80(1.882)	1-13/32	35.72	1.4063	6.4 (1/4)	S1105126	S1110126	S1115126
		36.00	1.4173		S1155360	S1160360	S1165360
	1-7/16	36.51	1.4375		S1105128	S1110128	S1115128
		37.00	1.4567		S1155370	S1160370	S1165370
	1-15/32	37.31	1.4688		S1105130	S1110130	S1115130
	38.00	1.4961	S1155380	S1160380	S1165380		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	◎	◎	○	◎

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				○	○	○			◎	○	○	○	○	○	○	○	○	○	○

YG SPADE DRILLS


SERIES 3, 4

SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15

- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-1/2	38.10	1.5000	6.4 (1/4)	S1105132	S1110132	S1115132
	1-17/32	38.89	1.5313		S1105134	S1110134	S1115134
		39.00	1.5354		S1155390	S1160390	S1165390
	1-9/16	39.69	1.5625		S1105136	S1110136	S1115136
		40.00	1.5748		S1155400	S1160400	S1165400
	1-19/32	40.48	1.5938		S1105138	S1110138	S1115138
		41.00	1.6142		S1155410	S1160410	S1165410
	1-5/8	41.28	1.6250		S1105140	S1110140	S1115140
		42.00	1.6535		S1155420	S1160420	S1165420
	1-21/32	42.07	1.6563		S1105142	S1110142	S1115142
	1-11/16	42.86	1.6875		S1105144	S1110144	S1115144
		43.00	1.6929		S1155430	S1160430	S1165430
	1-23/32	43.66	1.7188		S1105146	S1110146	S1115146
		44.00	1.7323		S1155440	S1160440	S1165440
	1-3/4	44.45	1.7500		S1105148	S1110148	S1115148
		45.00	1.7717		S1155450	S1160450	S1165450
	1-25/32	45.24	1.7813		S1105150	S1110150	S1115150
		46.00	1.8110		S1155460	S1160460	S1165460
	1-13/16	46.04	1.8125		S1105152	S1110152	S1115152
	1-27/32	46.83	1.8438		S1105154	S1110154	S1115154
	47.00	1.8504	S1155470	S1160470	S1165470		
1-7/8	47.63	1.8750	S1105156	S1110156	S1115156		
	48.00	1.8898	S1155480	S1160480	S1165480		
1-29/32	48.42	1.9063	S1105158	S1110158	S1115158		
	49.00	1.9291	S1155490	S1160490	S1165490		
1-15/16	49.21	1.9375	S1105160	S1110160	S1115160		
	50.00	1.9685	S1155500	S1160500	S1165500		
1-31/32	50.01	1.9688	S1105162	S1110162	S1115162		
2	50.80	2.0000	S1105200	S1110200	S1115200		
	51.00	2.0079	S1155510	S1160510	S1165510		
2-1/32	51.59	2.0313	S1105202	S1110202	S1115202		
2-3/64	52.00	2.0472	S1155520	S1160520	S1165520		
2-1/16	52.39	2.0625	S1105204	S1110204	S1115204		
	53.00	2.0866	S1155530	S1160530	S1165530		

4

Ø46.99
(1.850)
to
Ø65.28
(2.570)

7.9
(5/16)

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	◎	◎	○	◎

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				○	○	○			◎	○	○	○	○	○	○	○	○	○	○



SPADE DRILLS


SERIES 4

SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15

▶ For use in high nickel alloys and materials over 280 Brinell.
▶ Set up time can be reduced due to changing inserts easily on the machine.
▶ Any non-standard size available.

▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
4 Ø46.99 (1.850) to Ø65.28 (2.570)	2-3/32	53.18	2.0938	7.9 (5/16)	S1105206	S1110206	S1115206
	2-1/8	53.98	2.1250		S1105208	S1110208	S1115208
		54.00	2.1260		S1155540	S1160540	S1165540
	2-5/32	54.77	2.1563		S1105210	S1110210	S1115210
		55.00	2.1654		S1155550	S1160550	S1165550
	2-3/16	55.56	2.1875		S1105212	S1110212	S1115212
		56.00	2.2047		S1155560	S1160560	S1165560
	2-7/32	56.36	2.2188		S1105214	S1110214	S1115214
		57.00	2.2441		S1155570	S1160570	S1165570
	2-1/4	57.15	2.2500		S1105216	S1110216	S1115216
	2-9/32	57.94	2.2813		S1105218	S1110218	S1115218
		58.00	2.2835		S1155580	S1160580	S1165580
	2-5/16	58.74	2.3125		S1105220	S1110220	S1115220
		59.00	2.3228		S1155590	S1160590	S1165590
	2-11/32	59.53	2.3438		S1105222	S1110222	S1115222
		60.00	2.3622		S1155600	S1160600	S1165600
	2-3/8	60.33	2.3750		S1105224	S1110224	S1115224
		61.00	2.4016		S1155610	S1160610	S1165610
	2-13/32	61.12	2.4063		S1105226	S1110226	S1115226
	2-7/16	61.91	2.4375		S1105228	S1110228	S1115228
		62.00	2.4409		S1155620	S1160620	S1165620
	2-15/32	62.71	2.4688		S1105230	S1110230	S1115230
		63.00	2.4803		S1155630	S1160630	S1165630
	2-1/2	63.50	2.5000		S1105232	S1110232	S1115232
	64.00	2.5197	S1155640	S1160640	S1165640		
2-17/32	64.29	2.5313	S1105234	S1110234	S1115234		
	65.00	2.5591	S1155650	S1160650	S1165650		
2-9/16	65.09	2.5625	S1105236	S1110236	S1115236		



SPADE DRILLS


SERIES Y, Z, O

SPADE DRILL INSERTS - PREMIUM HSS M48

- EINWEG BOHREINSATZ - PREMIUM HSS M48
- Plaquettes SPADE DRILL - HSS Premium M48
- CUSPIDI SPADE DRILL - PREMIUM HSS M48

▶ For use in high temperature alloys and materials with 350-500 Brinell.
▶ Set up time can be reduced due to changing inserts easily on the machine.
▶ Any non-standard size available.

▶ Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350-500 Brinell
▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.397

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	S1555095	S1560095	S1565095
		9.53	.3750		S1505024	S1510024	S1515024
	25/64	9.80	.3860		S1555098	S1560098	S1565098
		9.92	.3906		S1505025	S1510025	S1515025
	13/32	10.00	.3937		S1555100	S1560100	S1565100
		10.20	.4016		S1555102	S1560102	S1565102
	27/64	10.32	.4063		S1505026	S1510026	S1515026
		10.50	.4134		S1555105	S1560105	S1565105
		10.72	.4219		S1505027	S1510027	S1515027
		10.80	.4252		S1555108	S1560108	S1565108
		11.00	.4331		S1555110	S1560110	S1565110
		7/16	11.11		.4375	S1505028	S1510028
Z Ø11.11(.437) to Ø12.95(.510)	29/64	11.50	.4528	2.4 (3/32)	S1555115	S1560115	S1565115
		11.51	.4531		S1505029	S1510029	S1515029
	15/32	11.91	.4688		S1505030	S1510030	S1515030
		12.00	.4724		S1555120	S1560120	S1565120
	31/64	12.30	.4844		S1505031	S1510031	S1515031
		12.50	.4921		S1555125	S1560125	S1565125
	1/2	12.70	.5000		S1505032	S1510032	S1515032
		13.00	.5118		S1555130	S1560130	S1565130
	33/64	13.10	.5156		S1505033	S1510033	S1515033
		13.49	.5313		S1505034	S1510034	S1515034
	35/64	13.50	.5315		S1555135	S1560135	S1565135
		13.89	.5469		S1505035	S1510035	S1515035
	14.00	.5512	S1555140	S1560140	S1565140		
	14.29	.5625	S1505036	S1510036	S1515036		
	14.50	.5709	S1555145	S1560145	S1565145		
	14.68	.5781	S1505037	S1510037	S1515037		
	15.00	.5906	S1555150	S1560150	S1565150		
	19/32	15.08	.5938	S1505038	S1510038	S1515038	
39/64	15.48	.6094	S1505039	S1510039	S1515039		
	15.50	.6102	S1555155	S1560155	S1565155		
5/8	15.88	.6250	S1505040	S1510040	S1515040		
	16.00	.6299	S1555160	S1560160	S1565160		

◎: Excellent ○: Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N				S							H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials				Heat Resistant Super Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎: Excellent ○: Good

YTG SPADE DRILLS


SERIES 0, 1

SPADE DRILL INSERTS - PREMIUM HSS M48

- EINWEG BOHREINSATZ - PREMIUM HSS M48
- Plaquettes SPADE DRILL - HSS Premium M48
- CUSPIDI SPADE DRILL - PREMIUM HSS M48

- ▶ For use in high temperature alloys and materials with 350-500 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350-500 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.397

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S1505041	S1510041	S1515041
		16.50	.6496		S1555165	S1560165	S1565165
	21/32	16.67	.6563		S1505042	S1510042	S1515042
		17.00	.6693		S1555170	S1560170	S1565170
	43/64	17.07	.6719		S1505043	S1510043	S1515043
	11/16	17.46	.6875		S1505044	S1510044	S1515044
		17.50	.6890		S1555175	S1560175	S1565175
	45/64	17.86	.7031		S1505045	S1510045	S1515045
		18.00	.7087		S1555180	S1560180	S1565180
		18.26	.7188		S1505046	S1510046	S1515046
1 Ø17.53 (.690) to Ø24.38 (.960)		18.50	.7283	4.0 (5/32)	S1555185	S1560185	S1565185
	47/64	18.65	.7344		S1505047	S1510047	S1515047
		19.00	.7480		S1555190	S1560190	S1565190
	3/4	19.05	.7500		S1505048	S1510048	S1515048
	49/64	19.45	.7656		S1505049	S1510049	S1515049
		19.50	.7677		S1555195	S1560195	S1565195
	25/32	19.84	.7813		S1505050	S1510050	S1515050
		20.00	.7874		S1555200	S1560200	S1565200
	51/64	20.24	.7969		S1505051	S1510051	S1515051
		20.50	.8071		S1555205	S1560205	S1565205
	13/16	20.64	.8125		S1505052	S1510052	S1515052
		21.00	.8268		S1555210	S1560210	S1565210
	27/32	21.43	.8438		S1505054	S1510054	S1515054
	55/64	21.83	.8594		S1505055	S1510055	S1515055
		22.00	.8661		S1555220	S1560220	S1565220
	7/8	22.23	.8750		S1505056	S1510056	S1515056
	57/64	22.62	.8906		S1505057	S1510057	S1515057
		23.00	.9055		S1555230	S1560230	S1565230
29/32	23.02	.9063	S1505058	S1510058	S1515058		
59/64	23.42	.9219	S1505059	S1510059	S1515059		
15/16	23.81	.9375	S1505060	S1510060	S1515060		
	24.00	.9449	S1555240	S1560240	S1565240		

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	○	◎	

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				○					◎	◎	◎	◎	◎	◎		◎			

YTG SPADE DRILLS


SERIES 2

SPADE DRILL INSERTS - PREMIUM HSS M48

- EINWEG BOHREINSATZ - PREMIUM HSS M48
- Plaquettes SPADE DRILL - HSS Premium M48
- CUSPIDI SPADE DRILL - PREMIUM HSS M48

- ▶ For use in high temperature alloys and materials with 350-500 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350-500 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.397

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1505062	S1510062	S1515062
	63/64	25.00	.9843		S1555250	S1560250	S1565250
	1	25.40	1.0000		S1505100	S1510100	S1515100
	1-1/64	25.80	1.0156		S1505101	S1510101	S1515101
		26.00	1.0236		S1555260	S1560260	S1565260
	1-1/32	26.19	1.0313		S1505102	S1510102	S1515102
	1-3/64	26.59	1.0469		S1505103	S1510103	S1515103
	1-1/16	26.99	1.0625		S1505104	S1510104	S1515104
		27.00	1.0630		S1555270	S1560270	S1565270
	1-3/32	27.78	1.0938		S1505106	S1510106	S1515106
		28.00	1.1024		S1555280	S1560280	S1565280
	1-7/64	28.18	1.1094		S1505107	S1510107	S1515107
	1-1/8	28.58	1.1250		S1505108	S1510108	S1515108
		29.00	1.1417		S1555290	S1560290	S1565290
	1-5/32	29.37	1.1563		S1505110	S1510110	S1515110
		30.00	1.1811		S1555300	S1560300	S1565300
	1-3/16	30.16	1.1875		S1505112	S1510112	S1515112
	1-7/32	30.96	1.2188		S1505114	S1510114	S1515114
		31.00	1.2205		S1555310	S1560310	S1565310
	1-1/4	31.75	1.2500		S1505116	S1510116	S1515116
		32.00	1.2598		S1555320	S1560320	S1565320
	1-9/32	32.54	1.2813		S1505118	S1510118	S1515118
	33.00	1.2992	S1555330	S1560330	S1565330		
1-5/16	33.34	1.3125	S1505120	S1510120	S1515120		
	34.00	1.3386	S1555340	S1560340	S1565340		
1-11/32	34.13	1.3438	S1505122	S1510122	S1515122		
1-3/8	34.93	1.3750	S1505124	S1510124	S1515124		
	35.00	1.3780	S1555350	S1560350	S1565350		

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	○	◎	


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				○					◎	◎	◎	◎	◎	◎		◎			

SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL pour la fonte - Carbure K10
- CUSPIDI SPADE DRILL - MD K10

- ▶ High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.398

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	S1655095	S1660095	S1665095	
		9.53	.3750	S1605024	S1610024	S1615024	
	25/64	9.80	.3860	S1655098	S1660098	S1665098	
		9.92	.3906	S1605025	S1610025	S1615025	
		10.00	.3937	S1655100	S1660100	S1665100	
		10.20	.4016	S1655102	S1660102	S1665102	
		10.32	.4063	S1605026	S1610026	S1615026	
		10.50	.4134	S1655105	S1660105	S1665105	
		10.72	.4219	S1605027	S1610027	S1615027	
		10.80	.4252	S1655108	S1660108	S1665108	
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	.4375	S1605028	S1610028	S1615028	
		11.50	.4528	S1655115	S1660115	S1665115	
	29/64	11.51	.4531	S1605029	S1610029	S1615029	
		11.91	.4688	S1605030	S1610030	S1615030	
		12.00	.4724	S1655120	S1660120	S1665120	
		12.30	.4844	S1605031	S1610031	S1615031	
		12.50	.4921	S1655125	S1660125	S1665125	
		12.70	.5000	S1605032	S1610032	S1615032	
		13.00	.5118	S1655130	S1660130	S1665130	
		13.10	.5156	S1605033	S1610033	S1615033	
0 Ø12.98 (.511) to Ø17.65 (.695)	35/64	13.49	.5313	S1605034	S1610034	S1615034	
		13.50	.5315	S1655135	S1660135	S1665135	
	9/16	13.89	.5469	S1605035	S1610035	S1615035	
		14.00	.5512	S1655140	S1660140	S1665140	
		14.29	.5625	S1605036	S1610036	S1615036	
		14.50	.5709	S1655145	S1660145	S1665145	
		14.68	.5781	S1605037	S1610037	S1615037	
		15.00	.5906	S1655150	S1660150	S1665150	
		15.08	.5938	S1605038	S1610038	S1615038	
		15.48	.6094	S1605039	S1610039	S1615039	
5/8	15.50	.6102	S1655155	S1660155	S1665155		
	15.88	.6250	S1605040	S1610040	S1615040		
16.00	.6299	S1655160	S1660160	S1665160			

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended															◎	◎	◎	◎	◎	◎


ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL pour la fonte - Carbure K10
- CUSPIDI SPADE DRILL - MD K10

- ▶ High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.398

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	S1605041	S1610041	S1615041	
		16.50	.6496	S1655165	S1660165	S1665165	
	21/32	16.67	.6563	S1605042	S1610042	S1615042	
		17.00	.6693	S1655170	S1660170	S1665170	
		17.07	.6719	S1605043	S1610043	S1615043	
		17.46	.6875	S1605044	S1610044	S1615044	
		17.50	.6890	S1655175	S1660175	S1665175	
		17.86	.7031	S1605045	S1610045	S1615045	
		18.00	.7087	S1655180	S1660180	S1665180	
		18.26	.7188	S1605046	S1610046	S1615046	
1 Ø17.53 (.690) to Ø24.38 (.960)	47/64	18.50	.7283	S1655185	S1660185	S1665185	
		18.65	.7344	S1605047	S1610047	S1615047	
	3/4	19.00	.7480	S1655190	S1660190	S1665190	
		19.05	.7500	S1605048	S1610048	S1615048	
		19.45	.7656	S1605049	S1610049	S1615049	
		19.50	.7677	S1655195	S1660195	S1665195	
		19.84	.7813	S1605050	S1610050	S1615050	
		20.00	.7874	S1655200	S1660200	S1665200	
		20.24	.7969	S1605051	S1610051	S1615051	
		20.50	.8071	S1655205	S1660205	S1665205	
0 Ø17.53 (.690) to Ø24.38 (.960)	13/16	20.64	.8125	S1605052	S1610052	S1615052	
		21.00	.8268	S1655210	S1660210	S1665210	
	27/32	21.43	.8438	S1605054	S1610054	S1615054	
		21.83	.8594	S1605055	S1610055	S1615055	
		22.00	.8661	S1655220	S1660220	S1665220	
		22.23	.8750	S1605056	S1610056	S1615056	
		22.62	.8906	S1605057	S1610057	S1615057	
		23.00	.9055	S1655230	S1660230	S1665230	
		23.02	.9063	S1605058	S1610058	S1615058	
		23.42	.9219	S1605059	S1610059	S1615059	
15/16	23.81	.9375	S1605060	S1610060	S1615060		
	24.00	.9449	S1655240	S1660240	S1665240		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended															◎	◎	◎	◎	◎	◎


ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL pour la fonte - Carbure K10
- CUSPIDI SPADE DRILL - MD K10

- ▶ High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.398

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	S1605062	S1610062	S1615062	
	63/64	25.00	.9843	S1655250	S1660250	S1665250	
	1	25.40	1.0000	S1605100	S1610100	S1615100	
	1-1/64	25.80	1.0156	S1605101	S1610101	S1615101	
		26.00	1.0236	S1655260	S1660260	S1665260	
	1-1/32	26.19	1.0313	S1605102	S1610102	S1615102	
	1-3/64	26.59	1.0469	S1605103	S1610103	S1615103	
	1-1/16	26.99	1.0625	S1605104	S1610104	S1615104	
		27.00	1.0630	S1655270	S1660270	S1665270	
	1-3/32	27.78	1.0938	S1605106	S1610106	S1615106	
		28.00	1.1024	S1655280	S1660280	S1665280	
	1-7/64	28.18	1.1094	S1605107	S1610107	S1615107	
	1-1/8	28.58	1.1250	S1605108	S1610108	S1615108	
		29.00	1.1417	S1655290	S1660290	S1665290	
	1-5/32	29.37	1.1563	S1605110	S1610110	S1615110	
		30.00	1.1811	S1655300	S1660300	S1665300	
	1-3/16	30.16	1.1875	S1605112	S1610112	S1615112	
	1-7/32	30.96	1.2188	S1605114	S1610114	S1615114	
		31.00	1.2205	S1655310	S1660310	S1665310	
	1-1/4	31.75	1.2500	S1605116	S1610116	S1615116	
	32.00	1.2598	S1655320	S1660320	S1665320		
1-9/32	32.54	1.2813	S1605118	S1610118	S1615118		
	33.00	1.2992	S1655330	S1660330	S1665330		
1-5/16	33.34	1.3125	S1605120	S1610120	S1615120		
	34.00	1.3386	S1655340	S1660340	S1665340		
1-11/32	34.13	1.3438	S1605122	S1610122	S1615122		
1-3/8	34.93	1.3750	S1605124	S1610124	S1615124		
	35.00	1.3780	S1655350	S1660350	S1665350		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎


ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SPADE DRILL INSERTS - CARBIDE K20

- EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL - Carbure K20
- CUSPIDI SPADE DRILL - MD K20

- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.399

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	S1755095	S1760095	S1765095	
		9.53	.3750	S1705024	S1710024	S1715024	
	25/64	9.80	.3860	S1755098	S1760098	S1765098	
		9.92	.3906	S1705025	S1710025	S1715025	
	13/32	10.00	.3937	S1755100	S1760100	S1765100	
		10.20	.4016	S1755102	S1760102	S1765102	
	27/64	10.32	.4063	S1705026	S1710026	S1715026	
		10.50	.4134	S1755105	S1760105	S1765105	
		10.72	.4219	S1705027	S1710027	S1715027	
		10.80	.4252	S1755108	S1760108	S1765108	
	11.00	.4331	S1755110	S1760110	S1765110		
	Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	.4375	S1705028	S1710028	S1715028
29/64		11.50	.4528	S1755115	S1760115	S1765115	
		11.51	.4531	S1705029	S1710029	S1715029	
15/32		11.91	.4688	S1705030	S1710030	S1715030	
		12.00	.4724	S1755120	S1760120	S1765120	
31/64		12.30	.4844	S1705031	S1710031	S1715031	
		12.50	.4921	S1755125	S1760125	S1765125	
1/2		12.70	.5000	S1705032	S1710032	S1715032	
		13.00	.5118	S1755130	S1760130	S1765130	
		33/64	13.10	.5156	S1705033	S1710033	S1715033
	17/32	13.49	.5313	S1705034	S1710034	S1715034	
	35/64	13.50	.5315	S1755135	S1760135	S1765135	
		13.89	.5469	S1705035	S1710035	S1715035	
	9/16	14.00	.5512	S1755140	S1760140	S1765140	
		14.29	.5625	S1705036	S1710036	S1715036	
	37/64	14.50	.5709	S1755145	S1760145	S1765145	
		14.68	.5781	S1705037	S1710037	S1715037	
	19/32	15.00	.5906	S1755150	S1760150	S1765150	
		15.08	.5938	S1705038	S1710038	S1715038	
	39/64	15.48	.6094	S1705039	S1710039	S1715039	
		15.50	.6102	S1755155	S1760155	S1765155	
	5/8	15.88	.6250	S1705040	S1710040	S1715040	
		16.00	.6299	S1755160	S1760160	S1765160	

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

YG SPADE DRILLS


SERIES 0, 1

SPADE DRILL INSERTS - CARBIDE K20

- EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL - Carbure K20
- CUSPIDI SPADE DRILL - MD K20

- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.399

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K20		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S1705041	S1710041	S1715041
		16.50	.6496		S1755165	S1760165	S1765165
	21/32	16.67	.6563		S1705042	S1710042	S1715042
		17.00	.6693		S1755170	S1760170	S1765170
	43/64	17.07	.6719		S1705043	S1710043	S1715043
	11/16	17.46	.6875		S1705044	S1710044	S1715044
		17.50	.6890		S1755175	S1760175	S1765175
	45/64	17.86	.7031		S1705045	S1710045	S1715045
		18.00	.7087		S1755180	S1760180	S1765180
		18.26	.7188		S1705046	S1710046	S1715046
1 Ø17.53 (.690) to Ø24.38 (.960)		18.50	.7283	4.0 (5/32)	S1755185	S1760185	S1765185
	47/64	18.65	.7344		S1705047	S1710047	S1715047
		19.00	.7480		S1755190	S1760190	S1765190
	3/4	19.05	.7500		S1705048	S1710048	S1715048
	49/64	19.45	.7656		S1705049	S1710049	S1715049
		19.50	.7677		S1755195	S1760195	S1765195
	25/32	19.84	.7813		S1705050	S1710050	S1715050
		20.00	.7874		S1755200	S1760200	S1765200
	51/64	20.24	.7969		S1705051	S1710051	S1715051
		20.50	.8071		S1755205	S1760205	S1765205
	13/16	20.64	.8125		S1705052	S1710052	S1715052
		21.00	.8268		S1755210	S1760210	S1765210
	27/32	21.43	.8438		S1705054	S1710054	S1715054
	55/64	21.83	.8594		S1705055	S1710055	S1715055
		22.00	.8661		S1755220	S1760220	S1765220
	7/8	22.23	.8750		S1705056	S1710056	S1715056
	57/64	22.62	.8906		S1705057	S1710057	S1715057
		23.00	.9055		S1755230	S1760230	S1765230
	29/32	23.02	.9063		S1705058	S1710058	S1715058
	59/64	23.42	.9219		S1705059	S1710059	S1715059
15/16	23.81	.9375	S1705060	S1710060	S1715060		
	24.00	.9449	S1755240	S1760240	S1765240		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎			◎	◎	◎	◎	◎	○	○	○	○	○	○

YG SPADE DRILLS


SERIES 2

SPADE DRILL INSERTS - CARBIDE K20

- EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL - Carbure K20
- CUSPIDI SPADE DRILL - MD K20

- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.399

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K20		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1705062	S1710062	S1715062
	63/64	25.00	.9843		S1755250	S1760250	S1765250
	1	25.40	1.0000		S1705100	S1710100	S1715100
	1-1/64	25.80	1.0156		S1705101	S1710101	S1715101
		26.00	1.0236		S1755260	S1760260	S1765260
	1-1/32	26.19	1.0313		S1705102	S1710102	S1715102
	1-3/64	26.59	1.0469		S1705103	S1710103	S1715103
	1-1/16	26.99	1.0625		S1705104	S1710104	S1715104
		27.00	1.0630		S1755270	S1760270	S1765270
	1-3/32	27.78	1.0938		S1705106	S1710106	S1715106
		28.00	1.1024		S1755280	S1760280	S1765280
	1-7/64	28.18	1.1094		S1705107	S1710107	S1715107
	1-1/8	28.58	1.1250		S1705108	S1710108	S1715108
		29.00	1.1417		S1755290	S1760290	S1765290
	1-5/32	29.37	1.1563		S1705110	S1710110	S1715110
		30.00	1.1811		S1755300	S1760300	S1765300
	1-3/16	30.16	1.1875		S1705112	S1710112	S1715112
	1-7/32	30.96	1.2188		S1705114	S1710114	S1715114
		31.00	1.2205		S1755310	S1760310	S1765310
	1-1/4	31.75	1.2500		S1705116	S1710116	S1715116
		32.00	1.2598		S1755320	S1760320	S1765320
	1-9/32	32.54	1.2813		S1705118	S1710118	S1715118
		33.00	1.2992		S1755330	S1760330	S1765330
	1-5/16	33.34	1.3125		S1705120	S1710120	S1715120
		34.00	1.3386		S1755340	S1760340	S1765340
1-11/32	34.13	1.3438	S1705122	S1710122	S1715122		
1-3/8	34.93	1.3750	S1705124	S1710124	S1715124		
	35.00	1.3780	S1755350	S1760350	S1765350		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎			◎	◎	◎	◎	◎	○	○	○	○	○	○

YG SPADE DRILLS


SERIES 3

SPADE DRILL INSERTS - CARBIDE K20

- EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL - Carbure K20
- CUSPIDI SPADE DRILL - MD K20

- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.399

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K20		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4063	S1705126	S1710126	S1715126	
		36.00	1.4173	S1755360	S1760360	S1765360	
	1-7/16	36.51	1.4375	S1705128	S1710128	S1715128	
		37.00	1.4567	S1755370	S1760370	S1765370	
	1-15/32	37.31	1.4688	S1705130	S1710130	S1715130	
		38.00	1.4961	S1755380	S1760380	S1765380	
	1-1/2	38.10	1.5000	S1705132	S1710132	S1715132	
		38.89	1.5313	S1705134	S1710134	S1715134	
	1-17/32	39.00	1.5354	S1755390	S1760390	S1765390	
		39.69	1.5625	S1705136	S1710136	S1715136	
	1-9/16	40.00	1.5748	S1755400	S1760400	S1765400	
		40.48	1.5938	S1705138	S1710138	S1715138	
	1-19/32	41.00	1.6142	S1755410	S1760410	S1765410	
		41.28	1.6250	S1705140	S1710140	S1715140	
	1-5/8	42.00	1.6535	S1755420	S1760420	S1765420	
		42.07	1.6563	S1705142	S1710142	S1715142	
	1-21/32	42.86	1.6875	S1705144	S1710144	S1715144	
		43.00	1.6929	S1755430	S1760430	S1765430	
	1-11/16	43.66	1.7188	S1705146	S1710146	S1715146	
		44.00	1.7323	S1755440	S1760440	S1765440	
1-23/32	44.45	1.7500	S1705148	S1710148	S1715148		
	45.00	1.7717	S1755450	S1760450	S1765450		
1-3/4	45.24	1.7813	S1705150	S1710150	S1715150		
	46.00	1.8110	S1755460	S1760460	S1765460		
1-25/32	46.04	1.8125	S1705152	S1710152	S1715152		
	46.83	1.8438	S1705154	S1710154	S1715154		
1-13/16	47.00	1.8504	S1755470	S1760470	S1765470		
	47.63	1.8750	S1705156	S1710156	S1715156		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

YG SPADE DRILLS


SERIES Y, Z, O

SPADE DRILL INSERTS - CARBIDE P40

- EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL - Carbure P40
- CUSPIDI SPADE DRILL - MD P40

- ▶ For general use in carbon steels and alloy steels.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.401

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE P40		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	S1855095	S1860095	S1865095	
		9.53	.3750	S1805024	S1810024	S1815024	
	25/64	9.80	.3860	S1855098	S1860098	S1865098	
		9.92	.3906	S1805025	S1810025	S1815025	
	13/32	10.00	.3937	S1855100	S1860100	S1865100	
		10.20	.4016	S1855102	S1860102	S1865102	
	27/64	10.32	.4063	S1805026	S1810026	S1815026	
		10.50	.4134	S1855105	S1860105	S1865105	
	7/16	10.80	.4252	S1805027	S1810027	S1815027	
		11.00	.4331	S1855108	S1860108	S1865108	
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	.4375	S1805028	S1810028	S1815028	
		11.50	.4528	S1855115	S1860115	S1865115	
	29/64	11.51	.4531	S1805029	S1810029	S1815029	
		11.91	.4688	S1805030	S1810030	S1815030	
	15/32	12.00	.4724	S1855120	S1860120	S1865120	
		12.30	.4844	S1805031	S1810031	S1815031	
	31/64	12.50	.4921	S1855125	S1860125	S1865125	
		12.70	.5000	S1805032	S1810032	S1815032	
	1/2	13.00	.5118	S1855130	S1860130	S1865130	
		13.10	.5156	S1805033	S1810033	S1815033	
33/64	13.49	.5313	S1805034	S1810034	S1815034		
	13.50	.5315	S1855135	S1860135	S1865135		
35/64	13.89	.5469	S1805035	S1810035	S1815035		
	14.00	.5512	S1855140	S1860140	S1865140		
9/16	14.29	.5625	S1805036	S1810036	S1815036		
	14.50	.5709	S1855145	S1860145	S1865145		
37/64	14.68	.5781	S1805037	S1810037	S1815037		
	15.00	.5906	S1855150	S1860150	S1865150		
19/32	15.08	.5938	S1805038	S1810038	S1815038		
	15.48	.6094	S1805039	S1810039	S1815039		
39/64	15.50	.6102	S1855155	S1860155	S1865155		
	15.88	.6250	S1805040	S1810040	S1815040		
5/8	16.00	.6299	S1855160	S1860160	S1865160		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	55	60	42	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

SPADE DRILLS


SERIES 3

SPADE DRILL INSERTS - CARBIDE P40

- EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL - Carbure P40
- CUSPIDI SPADE DRILL - MD P40

- ▶ For general use in carbon steels and alloy steels.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.401

3

Ø34.37 (1.353) to Ø47.80 (1.882)

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE P40		
	Inch	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
3	1-13/32	35.72	1.4063	6.4 (1/4)	S1805126	S1810126	S1815126
		36.00	1.4173		S1855360	S1860360	S1865360
	1-7/16	36.51	1.4375		S1805128	S1810128	S1815128
		37.00	1.4567		S1855370	S1860370	S1865370
	1-15/32	37.31	1.4688		S1805130	S1810130	S1815130
		38.00	1.4961		S1855380	S1860380	S1865380
	1-1/2	38.10	1.5000		S1805132	S1810132	S1815132
		38.89	1.5313		S1805134	S1810134	S1815134
	1-17/32	39.00	1.5354		S1855390	S1860390	S1865390
		39.69	1.5625		S1805136	S1810136	S1815136
	1-9/16	40.00	1.5748		S1855400	S1860400	S1865400
		40.48	1.5938		S1805138	S1810138	S1815138
	1-19/32	41.00	1.6142		S1855410	S1860410	S1865410
		41.28	1.6250		S1805140	S1810140	S1815140
	1-5/8	42.00	1.6535		S1855420	S1860420	S1865420
		42.07	1.6563		S1805142	S1810142	S1815142
	1-21/32	42.86	1.6875		S1805144	S1810144	S1815144
		43.00	1.6929		S1855430	S1860430	S1865430
	1-11/16	43.66	1.7188		S1805146	S1810146	S1815146
		44.00	1.7323		S1855440	S1860440	S1865440
1-23/32	44.45	1.7500	S1805148	S1810148	S1815148		
	45.00	1.7717	S1855450	S1860450	S1865450		
1-3/4	45.24	1.7813	S1805150	S1810150	S1815150		
	46.00	1.8110	S1855460	S1860460	S1865460		
1-25/32	46.04	1.8125	S1805152	S1810152	S1815152		
	46.83	1.8438	S1805154	S1810154	S1815154		
1-13/16	47.00	1.8504	S1855470	S1860470	S1865470		
	47.63	1.8750	S1805156	S1810156	S1815156		

© : Excellent ○ : Good

ISO	P									M				K						
Material Description	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO	N				S						H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○									○	○	○	○	○			◎			




Special features of SM-Point Spade Drill

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".

This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

Multiple thinning form at the bottom of the large thinning.


- ▶ The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.

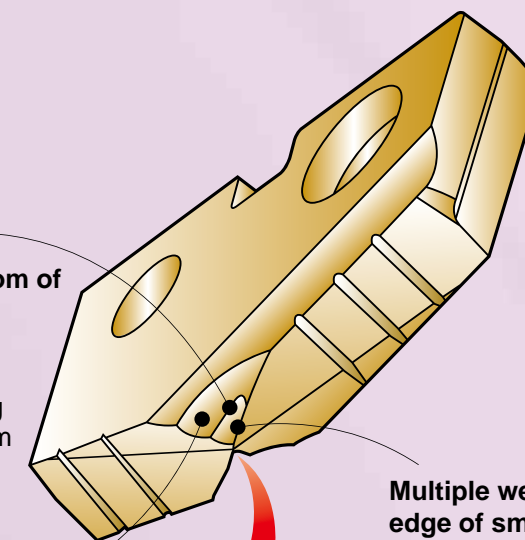

Multiple web thinning with the cutting edge of small web thinning.


- ▶ Good self-centering
- ▶ Less tool lead off
- ▶ Reduction in bell mouching, thrust
- ▶ Increased stability

Radius back face
▶ Wide chip space



Four-facet point

- ▶ Self-centering
- ▶ Less thrust force

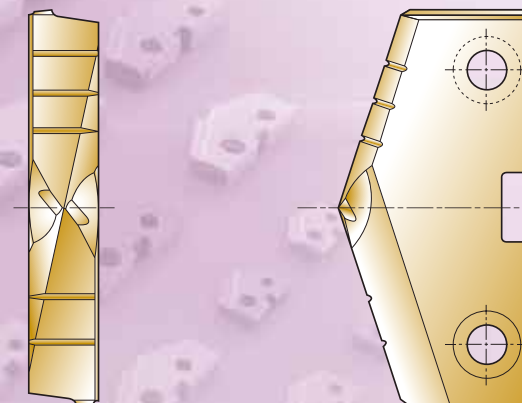

Y/G SPADE DRILLS


SERIES 1

SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4

- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	SM405045	SM410045	SM415045
		18.00	.7087		SM455180	SM460180	SM465180
	23/32	18.26	.7188		SM405046	SM410046	SM415046
		18.50	.7283		SM455185	SM460185	SM465185
	47/64	18.65	.7344		SM405047	SM410047	SM415047
		19.00	.7480		SM455190	SM460190	SM465190
	3/4	19.05	.7500		SM405048	SM410048	SM415048
		19.45	.7656		SM405049	SM410049	SM415049
	25/32	19.50	.7677		SM455195	SM460195	SM465195
		19.84	.7812		SM405050	SM410050	SM415050
		20.00	.7874		SM455200	SM460200	SM465200
	51/64	20.24	.7969		SM405051	SM410051	SM415051
		20.50	.8071		SM455205	SM460205	SM465205
	13/16	20.64	.8125		SM405052	SM410052	SM415052
		21.00	.8268		SM455210	SM460210	SM465210
	27/32	21.43	.8438		SM405054	SM410054	SM415054
		21.83	.8594		SM405055	SM410055	SM415055
	55/64	22.00	.8661		SM455220	SM460220	SM465220
		22.23	.8750		SM405056	SM410056	SM415056
		22.62	.8906		SM405057	SM410057	SM415057
	23.00	.9055	SM455230	SM460230	SM465230		
	23.02	.9062	SM405058	SM410058	SM415058		
	23.42	.9219	SM405059	SM410059	SM415059		
	15/16	23.81	.9375	SM405060	SM410060	SM415060	
		24.00	.9449	SM455240	SM460240	SM465240	

Y/G SPADE DRILLS


SERIES 2

SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4

- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM405062	SM410062	SM415062
	63/64	25.00	.9843		SM455250	SM460250	SM465250
	1	25.40	1.0000		SM405100	SM410100	SM415100
	1-1/64	25.80	1.0156		SM405101	SM410101	SM415101
		26.00	1.0236		SM455260	SM460260	SM465260
	1-1/32	26.19	1.0312		SM405102	SM410102	SM415102
	1-3/64	26.59	1.0469		SM405103	SM410103	SM415103
	1-1/16	26.99	1.0625		SM405104	SM410104	SM415104
		27.00	1.0630		SM455270	SM460270	SM465270
	1-3/32	27.78	1.0938		SM405106	SM410106	SM415106
		28.00	1.1024		SM455280	SM460280	SM465280
	1-7/64	28.18	1.1094		SM405107	SM410107	SM415107
	1-1/8	28.58	1.1250		SM405108	SM410108	SM415108
		29.00	1.1417		SM455290	SM460290	SM465290
	1-5/32	29.37	1.1562		SM405110	SM410110	SM415110
		30.00	1.1811		SM455300	SM460300	SM465300
	1-3/16	30.16	1.1875		SM405112	SM410112	SM415112
	1-7/32	30.96	1.2188		SM405114	SM410114	SM415114
		31.00	1.2205		SM455310	SM460310	SM465310
	1-1/4	31.75	1.2500		SM405116	SM410116	SM415116
		32.00	1.2598		SM455320	SM460320	SM465320
	1-9/32	32.54	1.2812		SM405118	SM410118	SM415118
		33.00	1.2992		SM455330	SM460330	SM465330
	1-5/16	33.34	1.3125		SM405120	SM410120	SM415120
		34.00	1.3386		SM455340	SM460340	SM465340
	1-11/32	34.13	1.3438		SM405122	SM410122	SM415122
	1-3/8	34.93	1.3750		SM405124	SM410124	SM415124
		35.00	1.3780		SM455350	SM460350	SM465350

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	◎	○

ISO	N				S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎															

Y/G SPADE DRILLS


SERIES 2

SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4

- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM405062	SM410062	SM415062
	63/64	25.00	.9843		SM455250	SM460250	SM465250
	1	25.40	1.0000		SM405100	SM410100	SM415100
	1-1/64	25.80	1.0156		SM405101	SM410101	SM415101
		26.00	1.0236		SM455260	SM460260	SM465260
	1-1/32	26.19	1.0312		SM405102	SM410102	SM415102
	1-3/64	26.59	1.0469		SM405103	SM410103	SM415103
	1-1/16	26.99	1.0625		SM405104	SM410104	SM415104
		27.00	1.0630		SM455270	SM460270	SM465270
	1-3/32	27.78	1.0938		SM405106	SM410106	SM415106
		28.00	1.1024		SM455280	SM460280	SM465280
	1-7/64	28.18	1.1094		SM405107	SM410107	SM415107
	1-1/8	28.58	1.1250		SM405108	SM410108	SM415108
		29.00	1.1417		SM455290	SM460290	SM465290
	1-5/32	29.37	1.1562		SM405110	SM410110	SM415110
		30.00	1.1811		SM455300	SM460300	SM465300
	1-3/16	30.16	1.1875		SM405112	SM410112	SM415112
	1-7/32	30.96	1.2188		SM405114	SM410114	SM415114
		31.00	1.2205		SM455310	SM460310	SM465310
	1-1/4	31.75	1.2500		SM405116	SM410116	SM415116
		32.00	1.2598		SM455320	SM460320	SM465320
	1-9/32	32.54	1.2812		SM405118	SM410118	SM415118
		33.00	1.2992		SM455330	SM460330	SM465330
	1-5/16	33.34	1.3125		SM405120	SM410120	SM415120
		34.00	1.3386		SM455340	SM460340	SM465340
	1-11/32	34.13	1.3438		SM405122	SM410122	SM415122
	1-3/8	34.93	1.3750		SM405124	SM410124	SM415124
		35.00	1.3780		SM455350	SM460350	SM465350

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	◎	○

ISO	N				S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100	</												

SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4

- For general use in steels and cast irons.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Stahl und Gusseisen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.395

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		HSS M4		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	SM405126	SM410126	SM415126	
		36.00	1.4173	SM455360	SM460360	SM465360	
	1-7/16	36.51	1.4375	SM405128	SM410128	SM415128	
		37.00	1.4567	SM455370	SM460370	SM465370	
	1-15/32	37.31	1.4688	SM405130	SM410130	SM415130	
		38.00	1.4961	SM455380	SM460380	SM465380	
	1-1/2	38.10	1.5000	SM405132	SM410132	SM415132	
		38.89	1.5312	SM405134	SM410134	SM415134	
	1-17/32	39.00	1.5354	SM455390	SM460390	SM465390	
		39.69	1.5625	SM405136	SM410136	SM415136	
	1-9/16	40.00	1.5748	SM455400	SM460400	SM465400	
		40.48	1.5938	SM405138	SM410138	SM415138	
	1-19/32	41.00	1.6142	SM455410	SM460410	SM465410	
		41.28	1.6250	SM405140	SM410140	SM415140	
	1-5/8	42.00	1.6535	SM455420	SM460420	SM465420	
		42.07	1.6562	SM405142	SM410142	SM415142	
	1-21/32	42.86	1.6875	SM405144	SM410144	SM415144	
		43.00	1.6929	SM455430	SM460430	SM465430	
	1-11/16	43.66	1.7188	SM405146	SM410146	SM415146	
		44.00	1.7323	SM455440	SM460440	SM465440	
	1-3/4	44.45	1.7500	SM405148	SM410148	SM415148	
		45.00	1.7717	SM455450	SM460450	SM465450	
	1-25/32	45.24	1.7812	SM405150	SM410150	SM415150	
		46.00	1.8110	SM455460	SM460460	SM465460	
1-13/16	46.04	1.8125	SM405152	SM410152	SM415152		
	46.83	1.8438	SM405154	SM410154	SM415154		
1-27/32	47.00	1.8504	SM455470	SM460470	SM465470		
	47.63	1.8750	SM405156	SM410156	SM415156		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15

- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI, SM-POINT - HSS T15

- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	SM155095	SM160095	SM165095	
		9.53	.3750	SM105024	SM110024	SM115024	
	25/64	9.80	.3858	SM155098	SM160098	SM165098	
		9.92	.3906	SM105025	SM110025	SM115025	
	13/32	10.00	.3937	SM155100	SM160100	SM165100	
		10.20	.4016	SM155102	SM160102	SM165102	
	27/64	10.32	.4062	SM105026	SM110026	SM115026	
		10.50	.4134	SM155105	SM160105	SM165105	
	1/2	10.80	.4252	SM105027	SM110027	SM115027	
		11.00	.4331	SM155108	SM160108	SM165108	
	Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	.4375	SM105028	SM110028	SM115028
			11.50	.4528	SM155115	SM160115	SM165115
29/64		11.51	.4531	SM105029	SM110029	SM115029	
		11.91	.4688	SM105030	SM110030	SM115030	
31/64		12.00	.4724	SM155120	SM160120	SM165120	
		12.30	.4844	SM105031	SM110031	SM115031	
1/2		12.50	.4921	SM155125	SM160125	SM165125	
		12.70	.5000	SM105032	SM110032	SM115032	
33/64		13.00	.5118	SM155130	SM160130	SM165130	
		13.10	.5156	SM105033	SM110033	SM115033	
17/32		13.49	.5312	SM105034	SM110034	SM115034	
		13.50	.5315	SM155135	SM160135	SM165135	
35/64	13.89	.5469	SM105035	SM110035	SM115035		
	14.00	.5512	SM155140	SM160140	SM165140		
9/16	14.29	.5625	SM105036	SM110036	SM115036		
	14.50	.5709	SM155145	SM160145	SM165145		
37/64	14.68	.5781	SM105037	SM110037	SM115037		
	15.00	.5906	SM155150	SM160150	SM165150		
19/32	15.08	.5938	SM105038	SM110038	SM115038		
	15.48	.6094	SM105039	SM110039	SM115039		
5/8	15.50	.6102	SM155155	SM160155	SM165155		
	15.88	.6250	SM105040	SM110040	SM115040		
16.00	16.00	.6299	SM155160	SM160160	SM165160		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15

- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI DI FORATURA SM-POINT - SUPER HSS T15

- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. SUPER HSS T15		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM105041	SM110041	SM115041
		16.50	.6496		SM155165	SM160165	SM165165
	21/32	16.67	.6562		SM105042	SM110042	SM115042
		17.00	.6693		SM155170	SM160170	SM165170
	43/64	17.07	.6719		SM105043	SM110043	SM115043
	11/16	17.46	.6875		SM105044	SM110044	SM115044
1 Ø17.53 (.690) to Ø24.38 (.960)		17.50	.6890	4.0 (5/32)	SM155175	SM160175	SM165175
	45/64	17.86	.7031		SM105045	SM110045	SM115045
		18.00	.7087		SM155180	SM160180	SM165180
	23/32	18.26	.7188		SM105046	SM110046	SM115046
		18.50	.7283		SM155185	SM160185	SM165185
	47/64	18.65	.7344		SM105047	SM110047	SM115047
		19.00	.7480		SM155190	SM160190	SM165190
	3/4	19.05	.7500		SM105048	SM110048	SM115048
	49/64	19.45	.7656		SM105049	SM110049	SM115049
		19.50	.7677		SM155195	SM160195	SM165195
	25/32	19.84	.7812		SM105050	SM110050	SM115050
		20.00	.7874		SM155200	SM160200	SM165200
	51/64	20.24	.7969		SM105051	SM110051	SM115051
		20.50	.8071		SM155205	SM160205	SM165205
	13/16	20.64	.8125		SM105052	SM110052	SM115052
		21.00	.8268		SM155210	SM160210	SM165210
	27/32	21.43	.8438		SM105054	SM110054	SM115054
	55/64	21.83	.8594		SM105055	SM110055	SM115055
		22.00	.8661		SM155220	SM160220	SM165220
	7/8	22.23	.8750		SM105056	SM110056	SM115056
57/64	22.62	.8906	SM105057	SM110057	SM115057		
	23.00	.9055	SM155230	SM160230	SM165230		
29/32	23.02	.9062	SM105058	SM110058	SM115058		
59/64	23.42	.9219	SM105059	SM110059	SM115059		
15/16	23.81	.9375	SM105060	SM110060	SM115060		
	24.00	.9449	SM155240	SM160240	SM165240		

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15

- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI DI FORATURA SM-POINT - SUPER HSS T15

- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. SUPER HSS T15		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM105062	SM110062	SM115062
	63/64	25.00	.9843		SM155250	SM160250	SM165250
	1	25.40	1.0000		SM105100	SM110100	SM115100
	1-1/64	25.80	1.0156		SM105101	SM110101	SM115101
		26.00	1.0236		SM155260	SM160260	SM165260
	1-1/32	26.19	1.0312		SM105102	SM110102	SM115102
	1-3/64	26.59	1.0469		SM105103	SM110103	SM115103
	1-1/16	26.99	1.0625		SM105104	SM110104	SM115104
		27.00	1.0630		SM155270	SM160270	SM165270
	1-3/32	27.78	1.0938		SM105106	SM110106	SM115106
		28.00	1.1024		SM155280	SM160280	SM165280
	1-7/64	28.18	1.1094		SM105107	SM110107	SM115107
	1-1/8	28.58	1.1250		SM105108	SM110108	SM115108
		29.00	1.1417		SM155290	SM160290	SM165290
	1-5/32	29.37	1.1562		SM105110	SM110110	SM115110
		30.00	1.1811		SM155300	SM160300	SM165300
	1-3/16	30.16	1.1875		SM105112	SM110112	SM115112
	1-7/32	30.96	1.2188		SM105114	SM110114	SM115114
		31.00	1.2205		SM155310	SM160310	SM165310
	1-1/4	31.75	1.2500		SM105116	SM110116	SM115116
	32.00	1.2598	SM155320	SM160320	SM165320		
1-9/32	32.54	1.2812	SM105118	SM110118	SM115118		
	33.00	1.2992	SM155330	SM160330	SM165330		
1-5/16	33.34	1.3125	SM105120	SM110120	SM115120		
	34.00	1.3386	SM155340	SM160340	SM165340		
1-11/32	34.13	1.3438	SM105122	SM110122	SM115122		
1-3/8	34.93	1.3750	SM105124	SM110124	SM115124		
	35.00	1.3780	SM155350	SM160350	SM165350		

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS - SUPER HSS T15

- SM-POINT EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL, pointe SM - Super HSS T15
- CUSPIDI DI FORATURA SM-POINT - SUPER HSS T15

- For use in high nickel alloys and materials over 280 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.396

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	SM105126	SM110126	SM115126	
		36.00	1.4173	SM155360	SM160360	SM165360	
	1-7/16	36.51	1.4375	SM105128	SM110128	SM115128	
		37.00	1.4567	SM155370	SM160370	SM165370	
	1-15/32	37.31	1.4688	SM105130	SM110130	SM115130	
		38.00	1.4961	SM155380	SM160380	SM165380	
	1-1/2	38.10	1.5000	SM105132	SM110132	SM115132	
	1-17/32	38.89	1.5312	SM105134	SM110134	SM115134	
		39.00	1.5354	SM155390	SM160390	SM165390	
	1-9/16	39.69	1.5625	SM105136	SM110136	SM115136	
		40.00	1.5748	SM155400	SM160400	SM165400	
	1-19/32	40.48	1.5938	SM105138	SM110138	SM115138	
		41.00	1.6142	SM155410	SM160410	SM165410	
	1-5/8	41.28	1.6250	SM105140	SM110140	SM115140	
		42.00	1.6535	SM155420	SM160420	SM165420	
	1-21/32	42.07	1.6562	SM105142	SM110142	SM115142	
		42.86	1.6875	SM105144	SM110144	SM115144	
	1-11/16	42.86	1.6875	SM155430	SM160430	SM165430	
		43.00	1.6929	SM105146	SM110146	SM115146	
	1-23/32	43.66	1.7188	SM155440	SM160440	SM165440	
		44.00	1.7323	SM105148	SM110148	SM115148	
	1-3/4	44.45	1.7500	SM155450	SM160450	SM165450	
		45.00	1.7717	SM105150	SM110150	SM115150	
	1-25/32	45.24	1.7812	SM155460	SM160460	SM165460	
		46.00	1.8110	SM105152	SM110152	SM115152	
	1-13/16	46.04	1.8125	SM155470	SM160470	SM165470	
		46.83	1.8438	SM105154	SM110154	SM115154	
	1-27/32	47.00	1.8504	SM155470	SM160470	SM165470	
47.63		1.8750	SM105156	SM110156	SM115156		

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	◎	◎	○	◎	


ISO	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○				○					◎	○	○	○	○	○	○	○	○	○	○	

SM-POINT SPADE DRILL INSERTS - PREMIUM HSS M48

- SM-POINT EINWEG BOHREINSATZ - PREMIUM HSS M48
- Plaquettes SPADE DRILL, pointe SM - HSS Premium M48
- CUSPIDI, SM-POINT - PREMIUM HSS M48

- For use in high temperature alloys and materials with 350-500 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350-500 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.397

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		PREMIUM HSS M48		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	SM555095	SM560095	SM565095	
		9.53	.3750	SM505024	SM510024	SM515024	
	25/64	9.80	.3858	SM555098	SM560098	SM565098	
		9.92	.3906	SM505025	SM510025	SM515025	
	13/32	10.00	.3937	SM555100	SM560100	SM565100	
		10.20	.4016	SM555102	SM560102	SM565102	
	27/64	10.32	.4062	SM505026	SM510026	SM515026	
		10.50	.4134	SM555105	SM560105	SM565105	
	7/16	10.72	.4219	SM505027	SM510027	SM515027	
		10.80	.4252	SM555108	SM560108	SM565108	
	Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.00	.4331	SM555110	SM560110	SM565110
			11.11	.4375	SM505028	SM510028	SM515028
29/64		11.50	.4528	SM555115	SM560115	SM565115	
		11.51	.4531	SM505029	SM510029	SM515029	
15/32		11.91	.4688	SM505030	SM510030	SM515030	
		12.00	.4724	SM555120	SM560120	SM565120	
31/64		12.30	.4844	SM505031	SM510031	SM515031	
		12.50	.4921	SM555125	SM560125	SM565125	
1/2		12.70	.5000	SM505032	SM510032	SM515032	
		13.00	.5118	SM555130	SM560130	SM565130	
O Ø12.98 (.511) to Ø17.65 (.695)		33/64	13.10	.5156	SM505033	SM510033	SM515033
			13.49	.5312	SM505034	SM510034	SM515034
	17/32	13.50	.5315	SM555135	SM560135	SM565135	
		13.89	.5469	SM505035	SM510035	SM515035	
	35/64	14.00	.5512	SM555140	SM560140	SM565140	
		14.29	.5625	SM505036	SM510036	SM515036	
	9/16	14.50	.5709	SM555145	SM560145	SM565145	
		14.68	.5781	SM505037	SM510037	SM515037	
	37/64	15.00	.5906	SM555150	SM560150	SM565150	
		15.08	.5938	SM505038	SM510038	SM515038	
	19/32	15.48	.6094	SM505039	SM510039	SM515039	
		15.50	.6102	SM555155	SM560155	SM565155	
5/8	15.88	.6250	SM505040	SM510040	SM515040		
	16.00	.6299	SM555160	SM560160	SM565160		

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	○	◎	

ISO	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○				○					◎	○	○	○	○	○	○	○	○	○	○	

Y/G SPADE DRILLS


SERIES 0, 1

SM-POINT SPADE DRILL INSERTS - PREMIUM HSS M48

- SM-POINT EINWEG BOHREINSATZ - PREMIUM HSS M48
- Plaquettes SPADE DRILL, pointe SM - HSS Premium M48
- CUSPIDI, SM-POINT - PREMIUM HSS M48

- For use in high temperature alloys and materials with 350-500 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350-500 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.397

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. PREMIUM HSS M48		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM505041	SM510041	SM515041
		16.50	.6496		SM555165	SM560165	SM565165
	21/32	16.67	.6562		SM505042	SM510042	SM515042
		17.00	.6693		SM555170	SM560170	SM565170
	43/64	17.07	.6719		SM505043	SM510043	SM515043
1 Ø17.53 (.690) to Ø24.38 (.960)	11/16	17.46	.6875	4.0 (5/32)	SM505044	SM510044	SM515044
		17.50	.6890		SM555175	SM560175	SM565175
	45/64	17.86	.7031		SM505045	SM510045	SM515045
		18.00	.7087		SM555180	SM560180	SM565180
	23/32	18.26	.7188		SM505046	SM510046	SM515046
		18.50	.7283		SM555185	SM560185	SM565185
	47/64	18.65	.7344		SM505047	SM510047	SM515047
		19.00	.7480		SM555190	SM560190	SM565190
	3/4	19.05	.7500		SM505048	SM510048	SM515048
	49/64	19.45	.7656		SM505049	SM510049	SM515049
		19.50	.7677		SM555195	SM560195	SM565195
	25/32	19.84	.7812		SM505050	SM510050	SM515050
		20.00	.7874		SM555200	SM560200	SM565200
	51/64	20.24	.7969		SM505051	SM510051	SM515051
		20.50	.8071		SM555205	SM560205	SM565205
	13/16	20.64	.8125		SM505052	SM510052	SM515052
		21.00	.8268		SM555210	SM560210	SM565210
	27/32	21.43	.8438		SM505054	SM510054	SM515054
	55/64	21.83	.8594		SM505055	SM510055	SM515055
		22.00	.8661		SM555220	SM560220	SM565220
7/8	22.23	.8750	SM505056	SM510056	SM515056		
57/64	22.62	.8906	SM505057	SM510057	SM515057		
	23.00	.9055	SM555230	SM560230	SM565230		
29/32	23.02	.9062	SM505058	SM510058	SM515058		
59/64	23.42	.9219	SM505059	SM510059	SM515059		
15/16	23.81	.9375	SM505060	SM510060	SM515060		
	24.00	.9449	SM555240	SM560240	SM565240		

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	○	◎

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Y/G SPADE DRILLS


SERIES 2

SM-POINT SPADE DRILL INSERTS - PREMIUM HSS M48

- SM-POINT EINWEG BOHREINSATZ - PREMIUM HSS M48
- Plaquettes SPADE DRILL, pointe SM - HSS Premium M48
- CUSPIDI, SM-POINT - PREMIUM HSS M48

- For use in high temperature alloys and materials with 350-500 Brinell.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung bei hitzebeständigen Legierungen und Werkstoffen mit 350-500 Brinell
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.397

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. PREMIUM HSS M48		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM505062	SM510062	SM515062
	63/64	25.00	.9843		SM555250	SM560250	SM565250
	1	25.40	1.0000		SM505100	SM510100	SM515100
	1-1/64	25.80	1.0156		SM505101	SM510101	SM515101
		26.00	1.0236		SM555260	SM560260	SM565260
	1-1/32	26.19	1.0312		SM505102	SM510102	SM515102
	1-3/64	26.59	1.0469		SM505103	SM510103	SM515103
	1-1/16	26.99	1.0625		SM505104	SM510104	SM515104
		27.00	1.0630		SM555270	SM560270	SM565270
	1-3/32	27.78	1.0938		SM505106	SM510106	SM515106
		28.00	1.1024		SM555280	SM560280	SM565280
	1-7/64	28.18	1.1094		SM505107	SM510107	SM515107
	1-1/8	28.58	1.1250		SM505108	SM510108	SM515108
		29.00	1.1417		SM555290	SM560290	SM565290
	1-5/32	29.37	1.1562		SM505110	SM510110	SM515110
		30.00	1.1811		SM555300	SM560300	SM565300
	1-3/16	30.16	1.1875		SM505112	SM510112	SM515112
	1-7/32	30.96	1.2188		SM505114	SM510114	SM515114
		31.00	1.2205		SM555310	SM560310	SM565310
	1-1/4	31.75	1.2500		SM505116	SM510116	SM515116
	32.00	1.2598	SM555320	SM560320	SM565320		
1-9/32	32.54	1.2812	SM505118	SM510118	SM515118		
	33.00	1.2992	SM555330	SM560330	SM565330		
1-5/16	33.34	1.3125	SM505120	SM510120	SM515120		
	34.00	1.3386	SM555340	SM560340	SM565340		
1-11/32	34.13	1.3438	SM505122	SM510122	SM515122		
1-3/8	34.93	1.3750	SM505124	SM510124	SM515124		
	35.00	1.3780	SM555350	SM560350	SM565350		

◎: Excellent ○: Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	○	◎

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL, pointe SM pour la fonte - Carbure K10
- CUSPIDI SM-POINT - MD K10

- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.398

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K10		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	SM655095	SM660095	SM665095
		9.53	.3750		SM605024	SM610024	SM615024
	25/64	9.80	.3858		SM655098	SM660098	SM665098
		9.92	.3906		SM605025	SM610025	SM615025
	13/32	10.00	.3937		SM655100	SM660100	SM665100
		10.20	.4016		SM655102	SM660102	SM665102
	27/64	10.32	.4062		SM605026	SM610026	SM615026
		10.50	.4134		SM655105	SM660105	SM665105
	7/16	10.80	.4252		SM655108	SM660108	SM665108
		11.00	.4331		SM655110	SM660110	SM665110
Z Ø11.11(.437) to Ø12.95(.510)	15/32	11.11	.4375	2.4 (3/32)	SM605028	SM610028	SM615028
		11.50	.4528		SM655115	SM660115	SM665115
	31/64	11.51	.4531		SM605029	SM610029	SM615029
		11.91	.4688		SM605030	SM610030	SM615030
	1/2	12.00	.4724		SM655120	SM660120	SM665120
		12.30	.4844		SM605031	SM610031	SM615031
	33/64	12.50	.4921		SM655125	SM660125	SM665125
		12.70	.5000		SM605032	SM610032	SM615032
	17/32	13.00	.5118		SM655130	SM660130	SM665130
		13.10	.5156		SM605033	SM610033	SM615033
0 Ø12.98 (.511) to Ø17.65 (.695)	35/64	13.49	.5312	3.2 (1/8)	SM605034	SM610034	SM615034
		13.50	.5315		SM655135	SM660135	SM665135
	9/16	13.89	.5469		SM605035	SM610035	SM615035
		14.00	.5512		SM655140	SM660140	SM665140
	37/64	14.29	.5625		SM605036	SM610036	SM615036
		14.50	.5709		SM655145	SM660145	SM665145
	19/32	14.68	.5781		SM605037	SM610037	SM615037
		15.00	.5906		SM655150	SM660150	SM665150
	39/64	15.08	.5938		SM605038	SM610038	SM615038
		15.48	.6094		SM605039	SM610039	SM615039
5/8	15.50	.6102	SM655155	SM660155	SM665155		
	15.88	.6250	SM605040	SM610040	SM615040		
	16.00	.6299	SM655160	SM660160	SM665160		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended															◎	◎	◎	◎	◎	◎

ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL, pointe SM pour la fonte - Carbure K10
- CUSPIDI SM-POINT - MD K10

- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.398

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE K10		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM605041	SM610041	SM615041
		16.50	.6496		SM655165	SM660165	SM665165
	21/32	16.67	.6562		SM605042	SM610042	SM615042
		17.00	.6693		SM655170	SM660170	SM665170
	11/16	17.07	.6719		SM605043	SM610043	SM615043
		17.46	.6875		SM605044	SM610044	SM615044
	45/64	17.50	.6890		SM655175	SM660175	SM665175
		17.86	.7031		SM605045	SM610045	SM615045
	23/32	18.00	.7087		SM655180	SM660180	SM665180
		18.26	.7188		SM605046	SM610046	SM615046
47/64	18.50	.7283	SM655185	SM660185	SM665185		
	18.65	.7344	SM605047	SM610047	SM615047		
3/4	19.00	.7480	SM655190	SM660190	SM665190		
	19.05	.7500	SM605048	SM610048	SM615048		
49/64	19.45	.7656	SM655195	SM660195	SM665195		
	19.50	.7677	SM605049	SM610049	SM615049		
25/32	19.84	.7812	SM655200	SM660200	SM665200		
	20.00	.7874	SM605050	SM610050	SM615050		
51/64	20.24	.7969	SM655205	SM660205	SM665205		
	20.50	.8071	SM605051	SM610051	SM615051		
13/16	20.64	.8125	SM655210	SM660210	SM665210		
	21.00	.8268	SM605052	SM610052	SM615052		
27/32	21.43	.8438	SM655220	SM660220	SM665220		
	21.83	.8594	SM605053	SM610053	SM615053		
55/64	22.00	.8661	SM655225	SM660225	SM665225		
	22.23	.8750	SM605054	SM610054	SM615054		
7/8	22.62	.8906	SM655230	SM660230	SM665230		
	23.00	.9055	SM605055	SM610055	SM615055		
29/32	23.02	.9062	SM655235	SM660235	SM665235		
	23.42	.9219	SM605056	SM610056	SM615056		
59/64	23.81	.9375	SM655240	SM660240	SM665240		
	24.00	.9449					

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended															◎	◎	◎	◎	◎	◎


ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
- Plaquettes SPADE DRILL, pointe SM pour la fonte - Carburé K10
- CUSPIDI SM-POINT - MD K10

- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.398

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K10		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM605062	SM610062	SM615062
	63/64	25.00	.9843		SM655250	SM660250	SM665250
	1	25.40	1.0000		SM605100	SM610100	SM615100
	1-1/64	25.80	1.0156		SM605101	SM610101	SM615101
	1-1/32	26.00	1.0236		SM655260	SM660260	SM665260
	1-3/64	26.19	1.0312		SM605102	SM610102	SM615102
	1-1/16	26.59	1.0469		SM605103	SM610103	SM615103
	1-1/16	26.99	1.0625		SM605104	SM610104	SM615104
	1-3/32	27.00	1.0630		SM655270	SM660270	SM665270
	1-3/32	27.78	1.0938		SM605106	SM610106	SM615106
	1-7/64	28.00	1.1024		SM655280	SM660280	SM665280
	1-1/8	28.18	1.1094		SM605107	SM610107	SM615107
	1-5/32	28.58	1.1250		SM605108	SM610108	SM615108
	1-5/32	29.00	1.1417		SM655290	SM660290	SM665290
	1-3/16	29.37	1.1562		SM605110	SM610110	SM615110
	1-7/32	30.00	1.1811		SM655300	SM660300	SM665300
	1-7/32	30.16	1.1875		SM605112	SM610112	SM615112
	1-7/32	30.96	1.2188		SM605114	SM610114	SM615114
	1-1/4	31.00	1.2205		SM655310	SM660310	SM665310
	1-9/32	31.75	1.2500		SM605116	SM610116	SM615116
	1-9/32	32.00	1.2598		SM655320	SM660320	SM665320
	1-5/16	32.54	1.2812		SM605118	SM610118	SM615118
	1-5/16	33.00	1.2992		SM655330	SM660330	SM665330
	1-11/32	33.34	1.3125		SM605120	SM610120	SM615120
1-3/8	34.00	1.3386	SM655340	SM660340	SM665340		
1-3/8	34.13	1.3438	SM605122	SM610122	SM615122		
1-3/8	34.93	1.3750	SM605124	SM610124	SM615124		
1-3/8	35.00	1.3780	SM655350	SM660350	SM665350		

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎


ISO	N							S							H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100	15	30	25	38	34	15	30	25	38	34	55	60	42	55
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carburé K20
- CUSPIDI SM-POINT - MD K20

- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.399

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	SM755095	SM760095	SM765095
		9.53	.3750		SM705024	SM710024	SM715024
		9.80	.3858		SM755098	SM760098	SM765098
		9.92	.3906		SM705025	SM710025	SM715025
		10.00	.3937		SM755100	SM760100	SM765100
		10.20	.4016		SM755102	SM760102	SM765102
	25/64	10.32	.4062		SM705026	SM710026	SM715026
		10.50	.4134		SM755105	SM760105	SM765105
		10.72	.4219		SM705027	SM710027	SM715027
		10.80	.4252		SM755108	SM760108	SM765108
		11.00	.4331		SM755110	SM760110	SM765110
		11.11	.4375		SM705028	SM710028	SM715028
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.50	.4528	2.4 (3/32)	SM755115	SM760115	SM765115
		11.51	.4531		SM705029	SM710029	SM715029
		11.91	.4688		SM705030	SM710030	SM715030
		12.00	.4724		SM755120	SM760120	SM765120
		12.30	.4844		SM705031	SM710031	SM715031
		12.50	.4921		SM755125	SM760125	SM765125
	15/32	12.70	.5000		SM705032	SM710032	SM715032
		13.00	.5118		SM755130	SM760130	SM765130
		13.10	.5156		SM705033	SM710033	SM715033
		13.49	.5312		SM755135	SM760135	SM765135
		13.50	.5315		SM705034	SM710034	SM715034
		13.89	.5469		SM755135	SM760135	SM765135
O Ø12.98 (.511) to Ø17.65 (.695)	35/64	14.00	.5512	3.2 (1/8)	SM705035	SM710035	SM715035
		14.29	.5625		SM755140	SM760140	SM765140
		14.50	.5709		SM705036	SM710036	SM715036
		14.68	.5781		SM755145	SM760145	SM765145
		15.00	.5906		SM705037	SM710037	SM715037
		15.08	.5938		SM755150	SM760150	SM765150
	19/32	15.48	.6094		SM705038	SM710038	SM715038
		15.50	.6102		SM755155	SM760155	SM765155
		15.88	.6250		SM705039	SM710039	SM715039
		16.00	.6299		SM755160	SM760160	SM765160
		16.00	.6299		SM705040	SM710040	SM715040
		16.00	.6299		SM755160	SM760160	SM765160

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N							S							H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100	15	30	25	38	34	15	30	25	38	34	55	60	42	55
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20

- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar

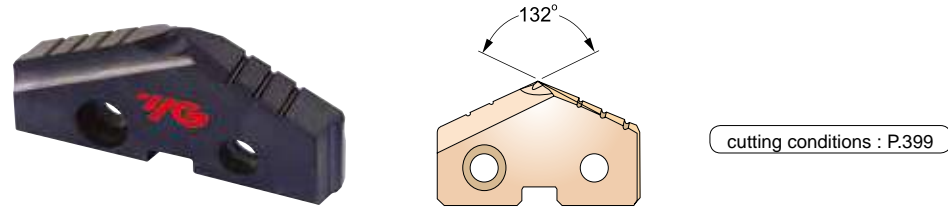

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM705041	SM710041	SM715041
		16.50	.6496		SM755165	SM760165	SM765165
	21/32	16.67	.6562		SM705042	SM710042	SM715042
		17.00	.6693		SM755170	SM760170	SM765170
	43/64	17.07	.6719		SM705043	SM710043	SM715043
	11/16	17.46	.6875		SM705044	SM710044	SM715044
		17.50	.6890		SM755175	SM760175	SM765175
	45/64	17.86	.7031		SM705045	SM710045	SM715045
		18.00	.7087		SM755180	SM760180	SM765180
		18.26	.7188		SM705046	SM710046	SM715046
1 Ø17.53 (.690) to Ø24.38 (.960)		18.50	.7283	4.0 (5/32)	SM755185	SM760185	SM765185
	47/64	18.65	.7344		SM705047	SM710047	SM715047
		19.00	.7480		SM755190	SM760190	SM765190
	3/4	19.05	.7500		SM705048	SM710048	SM715048
	49/64	19.45	.7656		SM705049	SM710049	SM715049
		19.50	.7677		SM755195	SM760195	SM765195
	25/32	19.84	.7812		SM705050	SM710050	SM715050
		20.00	.7874		SM755200	SM760200	SM765200
	51/64	20.24	.7969		SM705051	SM710051	SM715051
		20.50	.8071		SM755205	SM760205	SM765205
	13/16	20.64	.8125		SM705052	SM710052	SM715052
		21.00	.8268		SM755210	SM760210	SM765210
	27/32	21.43	.8438		SM705054	SM710054	SM715054
	55/64	21.83	.8594		SM705055	SM710055	SM715055
		22.00	.8661		SM755220	SM760220	SM765220
	7/8	22.23	.8750		SM705056	SM710056	SM715056
	57/64	22.62	.8906		SM705057	SM710057	SM715057
		23.00	.9055		SM755230	SM760230	SM765230
	29/32	23.02	.9062		SM705058	SM710058	SM715058
	59/64	23.42	.9219		SM705059	SM710059	SM715059
15/16	23.81	.9375	SM705060	SM710060	SM715060		
	24.00	.9449	SM755240	SM760240	SM765240		

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20

- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar

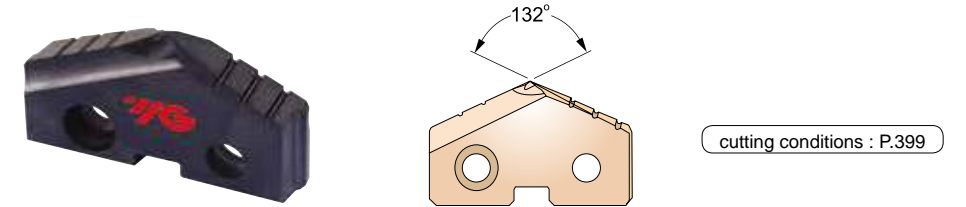

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM705062	SM710062	SM715062
	63/64	25.00	.9843		SM755250	SM760250	SM765250
	1	25.40	1.0000		SM705100	SM710100	SM715100
	1-1/64	25.80	1.0156		SM705101	SM710101	SM715101
		26.00	1.0236		SM755260	SM760260	SM765260
	1-1/32	26.19	1.0312		SM705102	SM710102	SM715102
	1-3/64	26.59	1.0469		SM705103	SM710103	SM715103
	1-1/16	26.99	1.0625		SM705104	SM710104	SM715104
		27.00	1.0630		SM755270	SM760270	SM765270
	1-3/32	27.78	1.0938		SM705106	SM710106	SM715106
		28.00	1.1024		SM755280	SM760280	SM765280
	1-7/64	28.18	1.1094		SM705107	SM710107	SM715107
	1-1/8	28.58	1.1250		SM705108	SM710108	SM715108
		29.00	1.1417		SM755290	SM760290	SM765290
	1-5/32	29.37	1.1562		SM705110	SM710110	SM715110
		30.00	1.1811		SM755300	SM760300	SM765300
	1-3/16	30.16	1.1875		SM705112	SM710112	SM715112
	1-7/32	30.96	1.2188		SM705114	SM710114	SM715114
		31.00	1.2205		SM755310	SM760310	SM765310
	1-1/4	31.75	1.2500		SM705116	SM710116	SM715116
		32.00	1.2598		SM755320	SM760320	SM765320
	1-9/32	32.54	1.2812		SM705118	SM710118	SM715118
		33.00	1.2992		SM755330	SM760330	SM765330
	1-5/16	33.34	1.3125		SM705120	SM710120	SM715120
		34.00	1.3386		SM755340	SM760340	SM765340
	1-11/32	34.13	1.3438		SM705122	SM710122	SM715122
	1-3/8	34.93	1.3750		SM705124	SM710124	SM715124
		35.00	1.3780		SM755350	SM760350	SM765350

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20

- For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.399

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	SM705126	SM710126	SM715126	
		36.00	1.4173	SM755360	SM760360	SM765360	
	1-7/16	36.51	1.4375	SM705128	SM710128	SM715128	
		37.00	1.4567	SM755370	SM760370	SM765370	
	1-15/32	37.31	1.4688	SM705130	SM710130	SM715130	
		38.00	1.4961	SM755380	SM760380	SM765380	
	1-1/2	38.10	1.5000	SM705132	SM710132	SM715132	
		38.89	1.5312	SM705134	SM710134	SM715134	
	1-17/32	39.00	1.5354	SM755390	SM760390	SM765390	
		39.69	1.5625	SM705136	SM710136	SM715136	
	1-9/16	40.00	1.5748	SM755400	SM760400	SM765400	
		40.48	1.5938	SM705138	SM710138	SM715138	
	1-19/32	41.00	1.6142	SM755410	SM760410	SM765410	
		41.28	1.6250	SM705140	SM710140	SM715140	
	1-5/8	42.00	1.6535	SM755420	SM760420	SM765420	
		42.07	1.6562	SM705142	SM710142	SM715142	
	1-21/32	42.86	1.6875	SM705144	SM710144	SM715144	
		43.00	1.6929	SM755430	SM760430	SM765430	
	1-23/32	43.66	1.7188	SM705146	SM710146	SM715146	
		44.00	1.7323	SM755440	SM760440	SM765440	
1-3/4	44.45	1.7500	SM705148	SM710148	SM715148		
	45.00	1.7717	SM755450	SM760450	SM765450		
1-25/32	45.24	1.7812	SM705150	SM710150	SM715150		
	46.00	1.8110	SM755460	SM760460	SM765460		
1-13/16	46.04	1.8125	SM705152	SM710152	SM715152		
	46.83	1.8438	SM705154	SM710154	SM715154		
1-27/32	47.00	1.8504	SM755470	SM760470	SM765470		
	47.63	1.8750	SM705156	SM710156	SM715156		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	○	○	○	○	○	○


ISO Material Description	N										S					H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40

- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.401

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40		
					TiN	TiCN	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	SM855095	SM860095	SM865095	
		9.53	.3750	SM805024	SM810024	SM815024	
	25/64	9.80	.3858	SM855098	SM860098	SM865098	
		9.92	.3906	SM805025	SM810025	SM815025	
		10.00	.3937	SM855100	SM860100	SM865100	
		10.20	.4016	SM855102	SM860102	SM865102	
	13/32	10.32	.4062	SM805026	SM810026	SM815026	
		10.50	.4134	SM855105	SM860105	SM865105	
	27/64	10.72	.4219	SM805027	SM810027	SM815027	
		10.80	.4252	SM855108	SM860108	SM865108	
	11.00	.4331	SM855110	SM860110	SM865110		
	Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.11	.4375	SM805028	SM810028	SM815028
		11.50	.4528	SM855115	SM860115	SM865115	
29/64		11.51	.4531	SM805029	SM810029	SM815029	
15/32		11.91	.4688	SM805030	SM810030	SM815030	
		12.00	.4724	SM855120	SM860120	SM865120	
31/64		12.30	.4844	SM805031	SM810031	SM815031	
		12.50	.4921	SM855125	SM860125	SM865125	
1/2		12.70	.5000	SM805032	SM810032	SM815032	
		13.00	.5118	SM855130	SM860130	SM865130	
33/64		13.10	.5156	SM805033	SM810033	SM815033	
O Ø12.98 (.511) to Ø17.65 (.695)	17/32	13.49	.5312	SM805034	SM810034	SM815034	
		13.50	.5315	SM855135	SM860135	SM865135	
	35/64	13.89	.5469	SM805035	SM810035	SM815035	
		14.00	.5512	SM855140	SM860140	SM865140	
	9/16	14.29	.5625	SM805036	SM810036	SM815036	
		14.50	.5709	SM855145	SM860145	SM865145	
	37/64	14.68	.5781	SM805037	SM810037	SM815037	
		15.00	.5906	SM855150	SM860150	SM865150	
	19/32	15.08	.5938	SM805038	SM810038	SM815038	
	39/64	15.48	.6094	SM805039	SM810039	SM815039	
	15.50	.6102	SM855155	SM860155	SM865155		
5/8	15.88	.6250	SM805040	SM810040	SM815040		
	16.00	.6299	SM855160	SM860160	SM865160		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

YG SPADE DRILLS

YG SPADE DRILLS

SERIES 0, 1

SERIES 2

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40



- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carbure P40
- CUSPIDI SM-POINT - MD P40

- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar

- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar

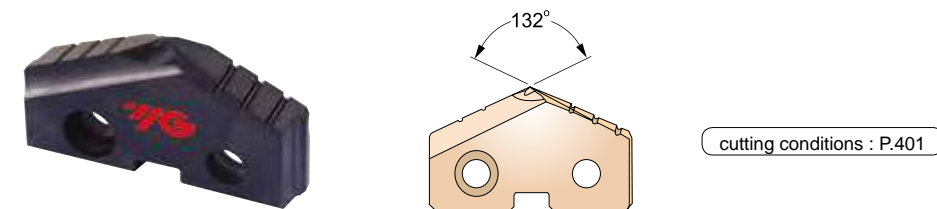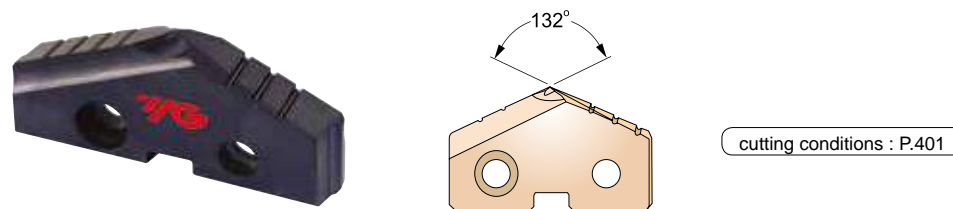

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE P40		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM805041	SM810041	SM815041
		16.50	.6496		SM855165	SM860165	SM865165
	21/32	16.67	.6562		SM805042	SM810042	SM815042
		17.00	.6693		SM855170	SM860170	SM865170
	43/64	17.07	.6719		SM805043	SM810043	SM815043
		17.46	.6875		SM805044	SM810044	SM815044
1 Ø17.53 (.690) to Ø24.38 (.960)		17.50	.6890	4.0 (5/32)	SM855175	SM860175	SM865175
	45/64	17.86	.7031		SM805045	SM810045	SM815045
		18.00	.7087		SM855180	SM860180	SM865180
	23/32	18.26	.7188		SM805046	SM810046	SM815046
		18.50	.7283		SM855185	SM860185	SM865185
	47/64	18.65	.7344		SM805047	SM810047	SM815047
		19.00	.7480		SM855190	SM860190	SM865190
	3/4	19.05	.7500		SM805048	SM810048	SM815048
	49/64	19.45	.7656		SM805049	SM810049	SM815049
		19.50	.7677		SM855195	SM860195	SM865195
	25/32	19.84	.7812		SM805050	SM810050	SM815050
		20.00	.7874		SM855200	SM860200	SM865200
	51/64	20.24	.7969		SM805051	SM810051	SM815051
		20.50	.8071		SM855205	SM860205	SM865205
	13/16	20.64	.8125		SM805052	SM810052	SM815052
		21.00	.8268		SM855210	SM860210	SM865210
	27/32	21.43	.8438		SM805054	SM810054	SM815054
	55/64	21.83	.8594		SM805055	SM810055	SM815055
		22.00	.8661		SM855220	SM860220	SM865220
	7/8	22.23	.8750		SM805056	SM810056	SM815056
	57/64	22.62	.8906		SM805057	SM810057	SM815057
		23.00	.9055		SM855230	SM860230	SM865230
	29/32	23.02	.9062		SM805058	SM810058	SM815058
	59/64	23.42	.9219		SM805059	SM810059	SM815059
15/16	23.81	.9375	SM805060	SM810060	SM815060		
	24.00	.9449	SM855240	SM860240	SM865240		

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No. CARBIDE P40		
	Inch (inch)	Metric (mm)	Decimal (inch)		TiN	TiCN	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	SM805062	SM810062	SM815062
	63/64	25.00	.9843		SM855250	SM860250	SM865250
	1	25.40	1.0000		SM805100	SM810100	SM815100
	1-1/64	25.80	1.0156		SM805101	SM810101	SM815101
		26.00	1.0236		SM855260	SM860260	SM865260
	1-1/32	26.19	1.0312		SM805102	SM810102	SM815102
	1-3/64	26.59	1.0469		SM805103	SM810103	SM815103
	1-1/16	26.99	1.0625		SM805104	SM810104	SM815104
		27.00	1.0630		SM855270	SM860270	SM865270
	1-3/32	27.78	1.0938		SM805106	SM810106	SM815106
		28.00	1.1024		SM855280	SM860280	SM865280
	1-7/64	28.18	1.1094		SM805107	SM810107	SM815107
	1-1/8	28.58	1.1250		SM805108	SM810108	SM815108
		29.00	1.1417		SM855290	SM860290	SM865290
	1-5/32	29.37	1.1562		SM805110	SM810110	SM815110
		30.00	1.1811		SM855300	SM860300	SM865300
	1-3/16	30.16	1.1875		SM805112	SM810112	SM815112
	1-7/32	30.96	1.2188		SM805114	SM810114	SM815114
		31.00	1.2205		SM855310	SM860310	SM865310
	1-1/4	31.75	1.2500		SM805116	SM810116	SM815116
		32.00	1.2598		SM855320	SM860320	SM865320
	1-9/32	32.54	1.2812		SM805118	SM810118	SM815118
		33.00	1.2992		SM855330	SM860330	SM865330
	1-5/16	33.34	1.3125		SM805120	SM810120	SM815120
		34.00	1.3386		SM855340	SM860340	SM865340
	1-11/32	34.13	1.3438		SM805122	SM810122	SM815122
	1-3/8	34.93	1.3750		SM805124	SM810124	SM815124
		35.00	1.3780		SM855350	SM860350	SM865350

◎: Excellent ○: Good

◎: Excellent ○: Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	

SM-POINT SPADE DRILL INSERTS - CARBIDE P40

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL, pointe SM - Carburé P40
- CUSPIDI SM-POINT - MD P40

- For general use in carbon steels and alloys steels.
- Improved stability and hole straightness by newly developed thinning design.
- Less thrust force and excellent self-centering.
- Any non-standard size available.

- Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnitengeometrie
- Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : P.401

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	SM805126	SM810126	SM815126	
		36.00	1.4173	SM855360	SM860360	SM865360	
	1-7/16	36.51	1.4375	SM805128	SM810128	SM815128	
		37.00	1.4567	SM855370	SM860370	SM865370	
	1-15/32	37.31	1.4688	SM805130	SM810130	SM815130	
		38.00	1.4961	SM855380	SM860380	SM865380	
	1-1/2	38.10	1.5000	SM805132	SM810132	SM815132	
		38.89	1.5312	SM805134	SM810134	SM815134	
	1-9/16	39.00	1.5354	SM855390	SM860390	SM865390	
		39.69	1.5625	SM805136	SM810136	SM815136	
	1-19/32	40.00	1.5748	SM855400	SM860400	SM865400	
		40.48	1.5938	SM805138	SM810138	SM815138	
	1-5/8	41.00	1.6142	SM855410	SM860410	SM865410	
		41.28	1.6250	SM805140	SM810140	SM815140	
	1-21/32	42.00	1.6535	SM855420	SM860420	SM865420	
		42.07	1.6562	SM805142	SM810142	SM815142	
	1-11/16	42.86	1.6875	SM805144	SM810144	SM815144	
		43.00	1.6929	SM855430	SM860430	SM865430	
	1-23/32	43.66	1.7188	SM805146	SM810146	SM815146	
		44.00	1.7323	SM855440	SM860440	SM865440	
1-3/4	44.45	1.7500	SM805148	SM810148	SM815148		
	45.00	1.7717	SM855450	SM860450	SM865450		
1-25/32	45.24	1.7812	SM805150	SM810150	SM815150		
	46.00	1.8110	SM855460	SM860460	SM865460		
1-13/16	46.04	1.8125	SM805152	SM810152	SM815152		
	46.83	1.8438	SM805154	SM810154	SM815154		
1-27/32	47.00	1.8504	SM855470	SM860470	SM865470		
	47.63	1.8750	SM805156	SM810156	SM815156		


◎ : Excellent ○ : Good

ISO	P										M				K										
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H								
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	600	420	550	400	450	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SPADE DRILL INSERTS - SUPER COBALT T15 FLAT BOTTOM

- SPADE DRILL BOHRER-EINSÄTZE - SUPER COBALT T15 (FLACH-NUT)
- Plaquettes SPADE DRILL à fond plat - Super Cobalt T15
- INSERTI SPADE DRILL - SUPER HSS T15 FONDO PIATTO



cutting conditions : P.400

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	Hardslick	TiAlN
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	S2155095	S2170095	S2165095
		9.53	.3750		S2105024	S2120024	S2115024
	25/64	9.80	.3858		S2155098	S2170098	S2165098
		9.92	.3906		S2105025	S2120025	S2115025
	13/32	10.00	.3937		S2155100	S2170100	S2165100
		10.20	.4016		S2155102	S2170102	S2165102
	27/64	10.32	.4062		S2105026	S2120026	S2115026
		10.50	.4134		S2155105	S2170105	S2165105
	1/2	10.72	.4219		S2105027	S2120027	S2115027
		10.80	.4252		S2155108	S2170108	S2165108
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.00	.4331	2.4 (3/32)	S2155110	S2170110	S2165110
		11.11	.4375		S2105028	S2120028	S2115028
	29/64	11.50	.4528		S2155115	S2170115	S2165115
		11.51	.4531		S2105029	S2120029	S2115029
	15/32	11.91	.4688		S2155120	S2170120	S2165120
		12.00	.4724		S2105030	S2120030	S2115030
	31/64	12.30	.4844		S2155125	S2170125	S2165125
		12.50	.4921		S2105031	S2120031	S2115031
	1/2	12.70	.5000		S2155130	S2170130	S2165130
		13.00	.5118		S2105032	S2120032	S2115032
O Ø12.98 (.511) to Ø17.65 (.695)	33/64	13.10	.5156	3.2 (1/8)	S2155135	S2170135	S2165135
		13.49	.5312		S2105033	S2120033	S2115033
	17/32	13.50	.5315		S2155135	S2170135	S2165135
		13.89	.5469		S2105034	S2120034	S2115034
	35/64	14.00	.5512		S2155140	S2170140	S2165140
		14.29	.5625		S2105035	S2120035	S2115035
	9/16	14.50	.5709		S2155140	S2170140	S2165140
		14.68	.5781		S2105036	S2120036	S2115036
	37/64	14.92	.5875		S2155145	S2170145	S2165145
		15.00	.5906		S2105037	S2120037	S2115037
19/32	15.08	.5938	S2155150	S2170150	S2165150		
	15.48	.6094	S2105038	S2120038	S2115038		
5/8	15.50	.6102	S2155155	S2170155	S2165155		
	15.88	.6250	S2105039	S2120039	S2115039		
16.00	16.00	.6299	S2155160	S2170160	S2165160		

◎ : Excellent ○ : Good

ISO	P										M				K										
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H								
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	600	420	550	400	450	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SPADE DRILLS

- i-ONE DRILLS
- i-DREAM DRILLS
- DREAM DRILLS -GENERAL
- DREAM DRILLS -HIGH FEED
- DREAM DRILLS -FLAT BOTTOM
- DREAM DRILLS -INOX
- DREAM DRILLS -ALU
- DREAM DRILLS -CFRP
- DREAM DRILLS -MQL
- DREAM DRILLS for HIGH HARDENED STEELS
- GENERAL CARBIDE DRILLS
- MULTI-1 DRILLS
- HPD DRILLS
- GOLD-P DRILLS
- SUPER-GP DRILLS
- STRAIGHT SHANK DRILLS
- TAPER SHANK DRILLS
- NC-SPOTTING DRILLS
- CENTER DRILLS

SPADE DRILLS

REAMERS


COUNTER SINKS

COUNTER BORES

TECHNICAL DATA

SPADE DRILL INSERTS - SUPER COBALT T15 FLAT BOTTOM

- SPADE DRILL BOHRER-EINSÄTZE - SUPER COBALT T15 (FLACH-NUT)
- Plaquettes SPADE DRILL à fond plat - Super Cobalt T15
- INSERTI SPADE DRILL - SUPER HSS T15 FONDO PIATTO

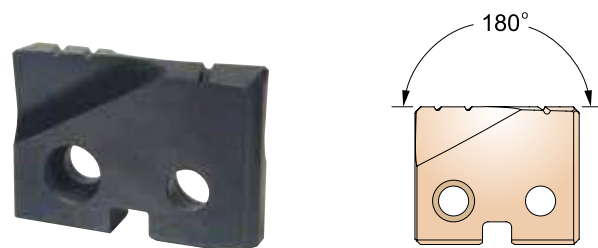

cutting conditions : P.400

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.				
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15				
					TiN	Hardslick	TiAlN		
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	S2105041	S2120041	S2115041		
		16.50	.6496		S2155165	S2170165	S2165165		
	21/32	16.67	.6562		S2105042	S2120042	S2115042		
		17.00	.6693		S2155170	S2170170	S2165170		
	43/64	17.07	.6719		S2105043	S2120043	S2115043		
		17.46	.6875		S2105044	S2120044	S2115044		
	11/16	17.50	.6890		S2155175	S2170175	S2165175		
		17.86	.7031		S2105045	S2120045	S2115045		
	1 Ø17.53 (.690) to Ø24.38 (.960)	45/64	18.00		.7087	4.0 (5/32)	S2155180	S2170180	S2165180
			18.26		.7188		S2105046	S2120046	S2115046
23/32		18.50	.7283	S2155185	S2170185		S2165185		
		18.65	.7344	S2105047	S2120047		S2115047		
3/4		19.00	.7480	S2155190	S2170190		S2165190		
		19.05	.7500	S2105048	S2120048		S2115048		
49/64		19.45	.7656	S2105049	S2120049		S2115049		
		19.50	.7677	S2155195	S2170195		S2165195		
25/32		19.84	.7812	S2105050	S2120050		S2115050		
		20.00	.7874	S2155200	S2170200		S2165200		
51/64	20.24	.7969	S2105051	S2120051	S2115051				
	20.50	.8071	S2155205	S2170205	S2165205				
13/16	20.64	.8125	S2105052	S2120052	S2115052				
	21.00	.8268	S2155210	S2170210	S2165210				
27/32	21.43	.8438	S2105054	S2120054	S2115054				
	21.83	.8594	S2105055	S2120055	S2115055				
55/64	22.00	.8661	S2155220	S2170220	S2165220				
	22.23	.8750	S2105056	S2120056	S2115056				
7/8	22.62	.8906	S2105057	S2120057	S2115057				
	23.00	.9055	S2155230	S2170230	S2165230				
29/32	23.02	.9062	S2105058	S2120058	S2115058				
	23.42	.9219	S2105059	S2120059	S2115059				
59/64	23.81	.9375	S2105060	S2120060	S2115060				
	24.00	.9449	S2155240	S2170240	S2165240				

◎ : Excellent ○ : Good

ISO	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	130	21	130	21	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	130	230	130	230	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	400	550	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

SPADE DRILL INSERTS - SUPER COBALT T15 FLAT BOTTOM

- SPADE DRILL BOHRER-EINSÄTZE - SUPER COBALT T15 (FLACH-NUT)
- Plaquettes SPADE DRILL à fond plat - Super Cobalt T15
- INSERTI SPADE DRILL - SUPER HSS T15 FONDO PIATTO



cutting conditions : P.400

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	Hardslick	TiAlN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S2105062	S2120062	S2115062
	63/64	25.00	.9843		S2105063	S2120063	S2115063
	1	25.40	1.0000		S2105100	S2120100	S2115100
	1-1/64	25.80	1.0156		S2105101	S2120101	S2115101
		26.00	1.0236		S2155260	S2170260	S2165260
	1-1/32	26.19	1.0312		S2105102	S2120102	S2115102
	1-3/64	26.59	1.0469		S2105103	S2120103	S2115103
	1-1/16	26.99	1.0625		S2105104	S2120104	S2115104
		27.00	1.0630		S2155270	S2170270	S2165270
	1-3/32	27.78	1.0938		S2105106	S2120106	S2115106
	1-7/64	28.00	1.1024		S2155280	S2170280	S2165280
		28.18	1.1094		S2105107	S2120107	S2115107
	1-1/8	28.58	1.1250		S2105108	S2120108	S2115108
		29.00	1.1417		S2155290	S2170290	S2165290
	1-5/32	29.37	1.1562		S2105110	S2120110	S2115110
		30.00	1.1811		S2155300	S2170300	S2165300
	1-3/16	30.16	1.1875		S2105112	S2120112	S2115112
		30.96	1.2188		S2105114	S2120114	S2115114
	1-7/32	31.00	1.2205		S2155310	S2170310	S2165310
		31.75	1.2500		S2105116	S2120116	S2115116
1-1/4	32.00	1.2598	S2155320	S2170320	S2165320		
	32.54	1.2812	S2105118	S2120118	S2115118		
1-9/32	33.00	1.2992	S2155330	S2170330	S2165330		
	33.34	1.3125	S2105120	S2120120	S2115120		
1-5/16	34.00	1.3386	S2155340	S2170340	S2165340		
	34.13	1.3438	S2105122	S2120122	S2115122		
1-11/32	34.93	1.3750	S2105124	S2120124	S2115124		
	35.00	1.3780	S2155350	S2170350	S2165350		


◎ : Excellent ○ : Good

ISO	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	130	21	130	21	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	130	230	130	230	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	400	550	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

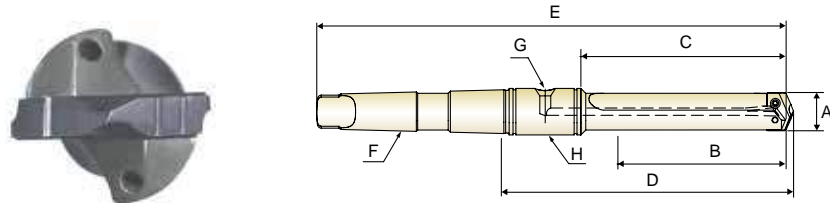


SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E		F	G
Y	ZY0STSMT02I	3/8 ~ 27/64	1-1/4	2-1/32	3-15/32	6-5/16	#2	1/16	PR110048
Z	ZZ0STSMT02I	7/16 ~ 1/2	1-1/4	2-1/32	3-15/32	6-5/16	#2	1/16	PR110048
0	Z00STSMT02I	33/64 ~ 11/16	1-3/8	2-3/16	3-41/64	6-15/32	#2	1/16	PR110048
0.5	Z05STSMT02I	39/64 ~ 11/16	1-3/8	2-3/16	3-41/64	6-15/32	#2	1/16	PR110048
1	Z10STSMT03I	45/64 ~ 15/16	2-3/4	3-7/8	5-39/64	9-5/32	#3	1/8	PR110100
	Z10STSMT04I	45/64 ~ 15/16	2-3/4	3-7/8	5-43/64	10-5/32	#4	1/8	PR110100
1.5	Z15STSMT03I	55/64 ~ 15/16	2-3/4	3-7/8	5-39/64	9-5/32	#3	1/8	PR110100
	Z15STSMT04I	55/64 ~ 15/16	2-3/4	3-7/8	5-43/64	10-5/32	#4	1/8	PR110100
2	Z20STSMT03I	31/32 ~ 1-3/8	3-3/8	4-1/2	6-15/64	9-25/32	#3	1/8	PR110100
	Z20STSMT04I	31/32 ~ 1-3/8	3-3/8	4-1/2	6-19/64	10-25/32	#4	1/8	PR110100
2.5	Z25STSMT03I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	6-15/64	9-25/32	#3	1/8	PR110100
	Z25STSMT04I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	6-37/64	11-1/16	#4	1/4	PR110116
3	Z30STSMT04I	1-13/32 ~ 1-7/8	4-3/4	6	8-1/8	12-9/16	#4	1/4	PR110116
	Z30STSMT05I	1-13/32 ~ 1-7/8	4-3/4	6	8-1/8	13-13/16	#5	1/4	PR110148
4	Z40STSMT04I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	8-5/8	13-1/16	#4	1/4	PR110116
	Z40STSMT05I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	8-5/8	14-5/16	#5	1/4	PR110148
5	Z50STSMT05I	2-1/2 ~ 3-1/2	6-3/4	8-1/2	11-5/16	16-15/16	#5	1/2	PR110216
	Z70STSMT05I	3-17/32 ~ 4-1/2	6-3/4	8-7/8	11-11/16	17-5/16	#5	1/2	PR110216

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

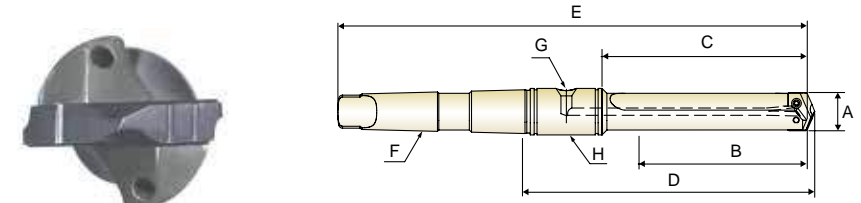

INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E		F	G
1	Z10ITSMT03I	45/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
1.5	Z15ITSMT03I	55/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
2	Z20ITSMT04I	31/32 ~ 1-3/8	5-3/8	6-1/2	8-19/64	12-25/32	#4	1/8	PR110100
2.5	Z25ITSMT04I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	8-37/64	13-1/16	#4	1/4	PR110116
3	Z30ITSMT04I	1-13/32 ~ 1-7/8	6-1/2	7-3/4	9-7/8	14-5/16	#4	1/4	PR110116

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

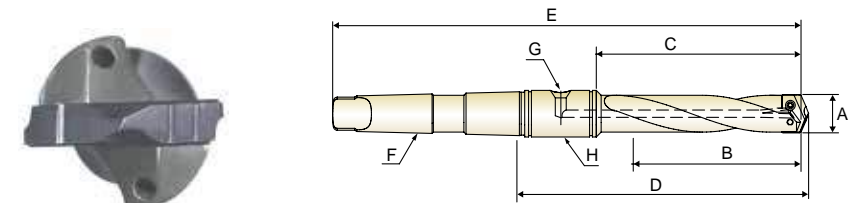




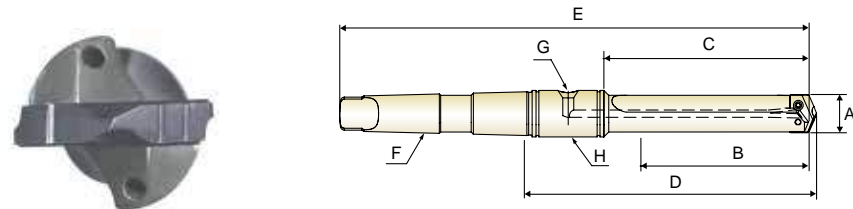
INTERMEDIATE LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E		F	G
1	Z10ITHMT03I	45/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
1.5	Z15ITHMT03I	55/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
2	Z20ITHMT04I	31/32 ~ 1-3/8	5-3/8	6-1/2	8-19/64	12-25/32	#4	1/8	PR110100
2.5	Z25ITHMT04I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	8-37/64	13-1/16	#4	1/4	PR110116

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS




-  HALTER MIT MORSEKEGEL
-  Porte-plaquette à queue cône morse
-  PUNTE CON ATTACCO CM



STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E		F	G
Y	ZY0SDSMT02I	3/8 ~ 27/64	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
Z	ZZ0SDSMT02I	7/16 ~ 1/2	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
0	Z00SDSMT02I	33/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
0.5	Z05SDSMT02I	39/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
1	Z10SDSMT03I	45/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z10SDSMT04I	45/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
1.5	Z15SDSMT03I	55/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z15SDSMT04I	55/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
2	Z20SDSMT03I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z20SDSMT04I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	PR110100
2.5	Z25SDSMT03I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z25SDSMT04I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/4	PR110116
3	Z30SDSMT04I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	11-5/8	16-1/16	#4	1/4	PR110116
	Z30SDSMT05I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	11-5/8	17-5/16	#5	1/4	PR110148
4	Z40SDSMT04I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	12-5/8	17-1/16	#4	1/4	PR110116
	Z40SDSMT05I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	12-5/8	18-5/16	#5	1/4	PR110148
5	Z50SDSMT05I	2-1/2 ~ 3-1/2	10-3/4	12-1/2	15-5/16	20-15/16	#5	1/2	PR110216
7	Z70SDSMT05I	3-17/32 ~ 4-1/2	10-3/4	12-7/8	15-11/16	21-5/16	#5	1/2	PR110216

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS

-  HALTER MIT MORSEKEGEL
-  Porte-plaquette à queue cône morse
-  PUNTE CON ATTACCO CM

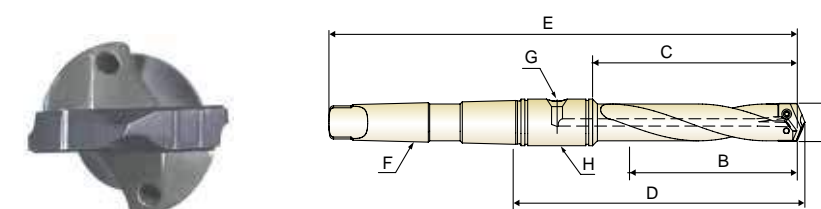

STANDARD LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E		F	G
Y	ZY0SDHMT02I	3/8 ~ 27/64	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
Z	ZZ0SDHMT02I	7/16 ~ 1/2	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
0	Z00SDHMT02I	33/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
0.5	Z05SDHMT02I	39/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
1	Z10SDHMT03I	45/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z10SDHMT04I	45/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
1.5	Z15SDHMT03I	55/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z15SDHMT04I	55/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
2	Z20SDHMT03I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z20SDHMT04I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	PR110100
2.5	Z25SDHMT03I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z25SDHMT04I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/4	PR110116

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

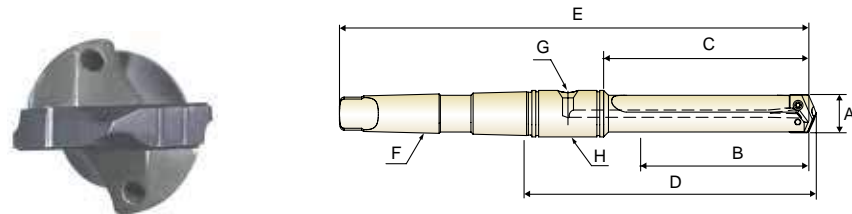

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXSMT02I	3/8 ~ 27/64	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
Z	ZZ0EXSMT02I	7/16 ~ 1/2	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
0	Z00EXSMT02I	33/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
0.5	Z05EXSMT02I	39/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
1	Z10EXSMT03I	45/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
1.5	Z15EXSMT03I	55/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
2	Z20EXSMT04I	31/32 ~ 1-3/8	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	PR110100
2.5	Z25EXSMT04I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	PR110116
3	Z30EXSMT04I	1-13/32 ~ 1-7/8	13-3/4	15	17-1/8	21-9/16	#4	1/4	PR110116
4	Z40EXSMT05I	1-29/32 ~ 2-9/16	16-5/8	18	20-1/8	25-13/16	#5	1/4	PR110148
5	Z50EXSMT05I	2-1/2 ~ 3-1/2	18-1/4	20	22-13/16	28-7/16	#5	1/2	PR110216
7	Z70EXSMT05I	3-17/32 ~ 4-1/2	21-7/8	24	26-13/16	32-7/16	#5	1/2	PR110216

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

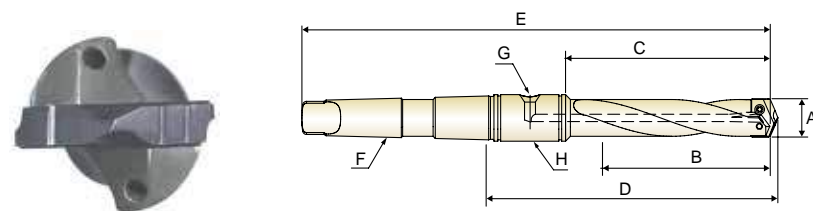


EXTENDED LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXHMT02I	3/8 ~ 27/64	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
Z	ZZ0EXHMT02I	7/16 ~ 1/2	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
0	Z00EXHMT02I	33/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
0.5	Z05EXHMT02I	39/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
1	Z10EXHMT03I	45/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
1.5	Z15EXHMT03I	55/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
2	Z20EXHMT04I	31/32 ~ 1-3/8	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	PR110100
2.5	Z25EXHMT04	1-3/16 ~ 1-3/8	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	PR110116

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

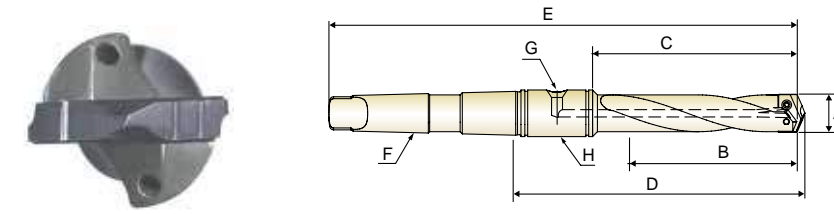


LONG LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
0	Z00LGHMT02I	33/64 ~ 11/16	7	7-13/16	9-17/64	12-3/32	#2	1/16	PR110048
0.5	Z05LGHMT02I	39/64 ~ 11/16	7	7-13/16	9-17/64	12-3/32	#2	1/16	PR110048

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

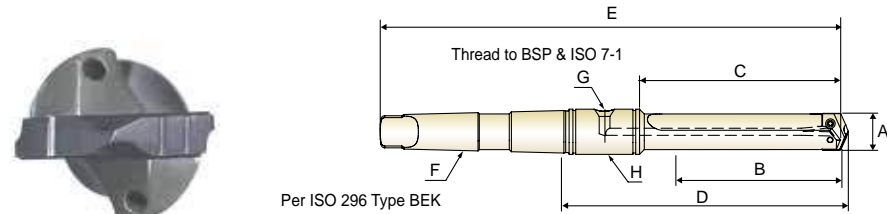

SHORT LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0STSMT02M	9.5 ~ 11.0	31.8	51.5	88.0	160.3	#2	1/16	PR120190
Z	ZZ0STSMT02M	11.5 ~ 12.5	31.8	51.5	88.0	160.3	#2	1/16	PR120190
0	Z00STSMT02M	13.0 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
0.5	Z05STSMT02M	15.5 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
1	Z10STSMT03M	18.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
1.5	Z15STSMT03M	22.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
2	Z20STSMT04M	25.0 ~ 35.0	85.7	114.3	160.4	273.8	#4	1/8	PR120254
2.5	Z25STSMT04M	30.0 ~ 35.0	85.7	114.3	167.6	281.0	#4	1/4	PR120317
3	Z30STSMT04M	36.0 ~ 47.0	120.6	152.4	206.4	319.1	#4	1/4	PR120317
4	Z40STSMT05M	48.0 ~ 65.0	130.1	165.1	219.1	363.5	#5	1/4	PR120444
5	Z50STSMT05M	64.0 ~ 88.0	171.5	215.9	287.3	430.2	#5	1/2	PR120571
7	Z70STSMT05M	90.0 ~ 114.0	171.5	225.4	296.8	439.7	#5	1/2	PR120571

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

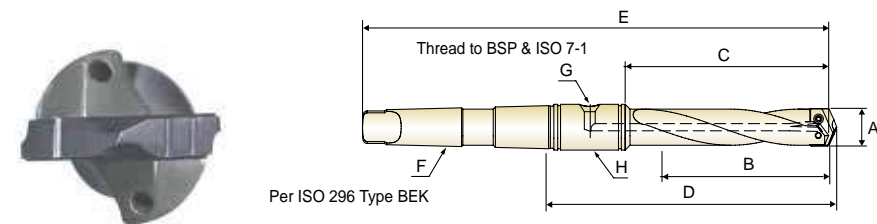


INTERMEDIATE LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
1	Z10ITHMT03M	18.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
1.5	Z15ITHMT03M	22.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
2	Z20ITHMT04M	25.0 ~ 35.0	136.5	165.1	211.2	324.6	#4	1/8	PR120254
2.5	Z25ITHMT04M	30.0 ~ 35.0	136.5	165.1	218.4	331.8	#4	1/4	PR120317
3	Z30ITHMT04M	36.0 ~ 47.0	165.1	196.9	250.9	363.6	#4	1/4	PR120317

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

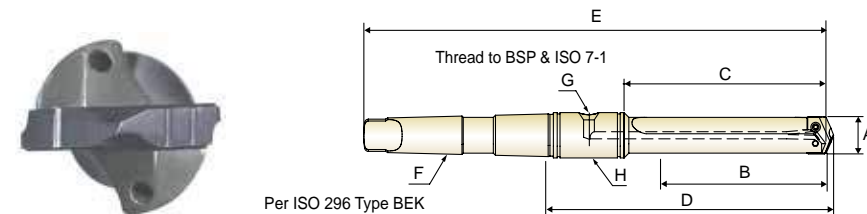


STANDARD LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0SDHMT02M	9.5 ~ 11.0	60.3	80.2	116.7	188.9	#2	1/16	PR120190
Z	ZZ0SDHMT02M	11.5 ~ 12.5	60.3	80.2	116.7	188.9	#2	1/16	PR120190
0	Z00SDHMT02M	13.0 ~ 17.5	63.5	84.1	121.0	192.9	#2	1/16	PR120190
0.5	Z05SDHMT02M	15.5 ~ 17.5	63.5	84.1	121.0	192.9	#2	1/16	PR120190
1	Z10SDHMT03M	18.0 ~ 24.0	171.5	200.0	244.1	334.2	#3	1/8	PR120254
1.5	Z15SDHMT03M	22.0 ~ 24.0	171.5	200.0	244.1	334.2	#3	1/8	PR120254
2	Z20SDHMT04M	25.0 ~ 35.0	187.3	215.9	262.0	375.4	#4	1/8	PR120254
2.5	Z25SDHMT04M	30.0 ~ 35.0	187.3	215.9	269.2	382.6	#4	1/4	PR120317
3	Z30SDHMT04M	36.0 ~ 47.0	209.5	241.3	295.3	408.0	#4	1/4	PR120317
4	Z40SDHMT05M	48.0 ~ 65.0	231.8	266.7	320.7	465.1	#5	1/4	PR120444
5	Z50SDHMT05M	64.0 ~ 88.0	273.1	317.5	388.9	531.8	#5	1/2	PR120571
7	Z70SDHMT05M	90.0 ~ 114.0	273.1	327.0	398.5	541.3	#5	1/2	PR120571

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

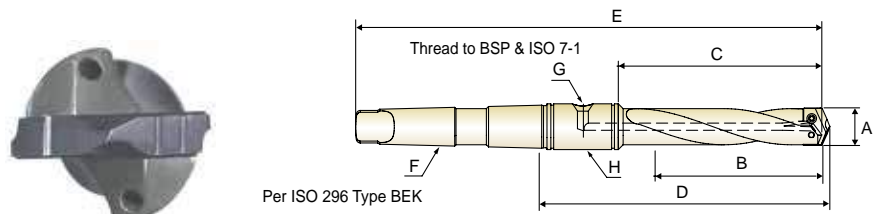

EXTENDED LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E			
Y	ZY0EXHMT02M	9.5 ~ 11.0	111.1	130.9	167.4	239.7	#2	1/16	PR120190
Z	ZZ0EXHMT02M	11.5 ~ 12.5	111.1	130.9	167.4	239.7	#2	1/16	PR120190
0	Z00EXHMT02M	13.0 ~ 17.5	114.3	135.0	171.8	243.7	#2	1/16	PR120190
0.5	Z05EXHMT02M	15.5 ~ 17.5	114.3	135.0	171.8	243.7	#2	1/16	PR120190
1	Z10EXHMT03M	18.0 ~ 24.0	273.1	301.6	345.7	435.8	#3	1/8	PR120254
1.5	Z15EXHMT03M	22.0 ~ 24.0	273.1	301.6	345.7	435.8	#3	1/8	PR120254
2	Z20EXHMT04M	25.0 ~ 35.0	289.0	317.5	363.6	477.0	#4	1/8	PR120254
2.5	Z25EXHMT04M	30.0 ~ 35.0	289.0	317.5	370.8	484.2	#4	1/4	PR120317

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

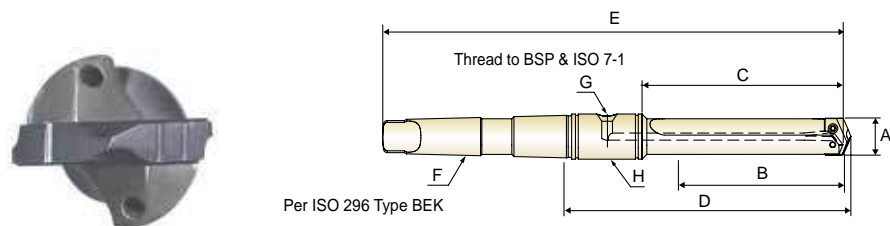


EXTENDED LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E			
3	Z30EXSMT04M	36.0 ~ 47.0	349.3	381.0	435.0	547.7	#4	1/4	PR120317
4	Z40EXSMT05M	48.0 ~ 65.0	422.3	457.2	511.2	655.6	#5	1/4	PR120444
5	Z50EXSMT05M	64.0 ~ 88.0	463.6	508.0	579.4	722.3	#5	1/2	PR120571
7	Z70EXSMT05M	90.0 ~ 114.0	555.6	609.6	681.1	823.9	#5	1/2	PR120571

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

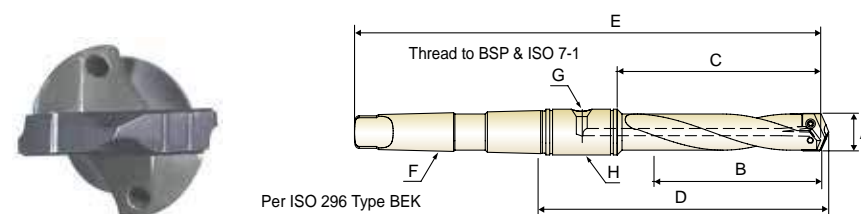


LONG LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E			
0	Z00LGHMT02M	13.0 ~ 17.5	177.8	198.5	235.3	307.2	#2	1/16	PR120190
0.5	Z05LGHMT02M	15.5 ~ 17.5	177.8	198.5	235.3	307.2	#2	1/16	PR120190

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

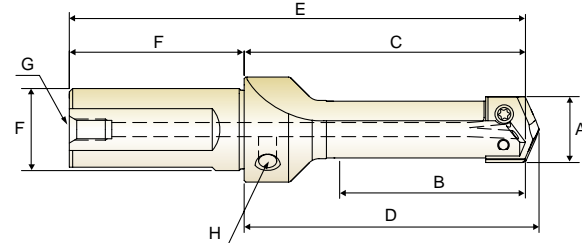

STUB LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap	
							Dia.	Length	Rear	Side
		A	B	C	D	E	F	G	H	
Y	ZY0SBSF063I	3/8 ~ 27/64	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	1/8
Z	ZZ0SBSF063I	7/16 ~ 1/2	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	1/8
0	Z00SBSF075I	33/64 ~ 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	1/8
0.5	Z05SBSF075I	39/64 ~ 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	1/8
1	Z10SBSF100I	45/64 ~ 15/16	1-7/8	2-63/64	3-1/8	5-17/64	1	2-9/32	1/8	1/8
1.5	Z15SBSF100I	55/64 ~ 15/16	2-1/4	3-31/64	3-5/8	5-49/64	1	2-9/32	1/8	1/8
2	Z20SBSF125I	31/32 ~ 1-3/8	2-1/4	3-31/64	3-5/8	5-49/64	1-1/4	2-9/32	1/4	1/8
2.5	Z25SBSF125I	1-3/16 ~ 1-3/8	3-5/8	4-55/64	5	7-9/64	1-1/4	2-9/32	1/4	1/8
3	Z30SBSF150I	1-13/32 ~ 1-7/8	3	4-59/64	5-7/64	7-39/64	1-1/2	2-11/16	1/4	1/4

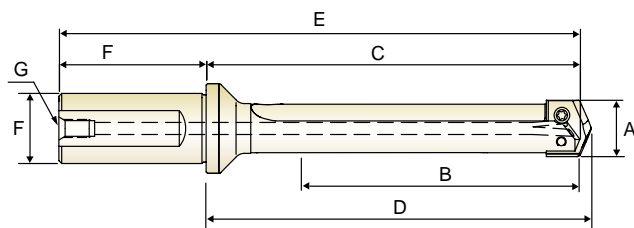


SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0STSF075I	3/8 ~ 27/64	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8
Z	ZZ0STSF075I	7/16 ~ 1/2	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8
0	Z00STSF075I	33/64 ~ 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8
0.5	Z05STSF075I	39/64 ~ 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8
1	Z10STSF100I	45/64 ~ 15/16	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8
1.5	Z15STSF100I	55/64 ~ 15/16	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8
2	Z20STSF125I	31/32 ~ 1-3/8	3-3/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4
2.5	Z25STSF125I	1-3/16 ~ 1-3/8	3-3/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4
3	Z30STSF150I	1-13/32 ~ 1-7/8	4-3/4	6-13/16	7	9-1/2	1-1/2	2-11/16	1/4
4	Z40STSF150I	1-29/32 ~ 2-9/16	5-1/8	7-1/16	7-1/4	9-3/4	1-1/2	2-11/16	1/4


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

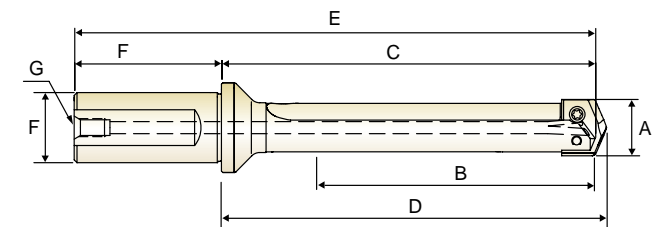

INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10ITSF100I	45/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
1.5	Z15ITSF100I	55/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
2	Z20ITSF125I	31/32 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
2.5	Z25ITSF125I	1-3/16 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
3	Z30ITSF150I	1-13/32 ~ 1-7/8	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4

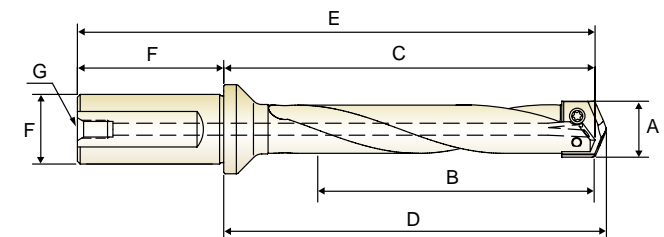

INTERMEDIATE LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10ITHF100I	45/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
1.5	Z15ITHF100I	55/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
2	Z20ITHF125I	31/32 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
2.5	Z25ITHF125I	1-3/16 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
3	Z30ITHF150I	1-13/32 ~ 1-7/8	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4




Z**SDSF SERIES

Z**SDHF SERIES


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

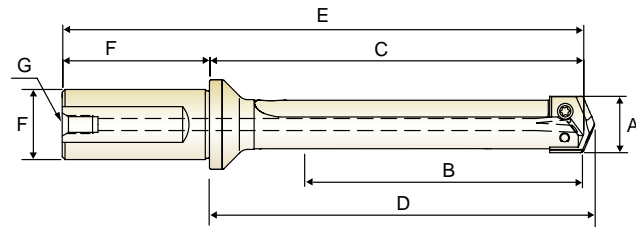

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
Y	ZY0SDSF075I	3/8 ~ 27/64	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
Z	ZZ0SDSF075I	7/16 ~ 1/2	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
0	Z00SDSF075I	33/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
0.5	Z05SDSF075I	39/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
1	Z10SDSF100I	45/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
1.5	Z15SDSF100I	55/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
2	Z20SDSF125I	31/32 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
2.5	Z25SDSF125I	1-3/16 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
3	Z30SDSF150I	1-13/32 ~ 1-7/8	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4
4	Z40SDSF150I	1-29/32 ~ 2-9/16	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4

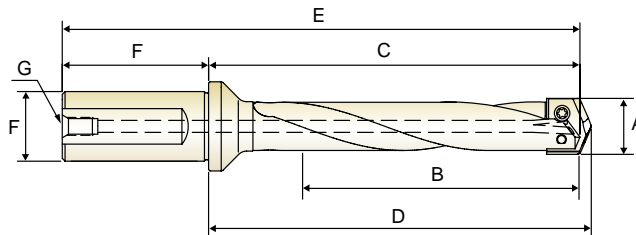

STANDARD LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
Y	ZY0SDHF075I	3/8 ~ 27/64	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
Z	ZZ0SDHF075I	7/16 ~ 1/2	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
0	Z00SDHF075I	33/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
0.5	Z05SDHF075I	39/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
1	Z10SDHF100I	45/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
1.5	Z15SDHF100I	55/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
2	Z20SDHF125I	31/32 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
2.5	Z25SDHF125I	1-3/16 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
3	Z30SDHF150I	1-13/32 ~ 1-7/8	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4
4	Z40SDHF150I	1-29/32 ~ 2-9/16	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4




Z**EXSF SERIES

Z**EXHF SERIES


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

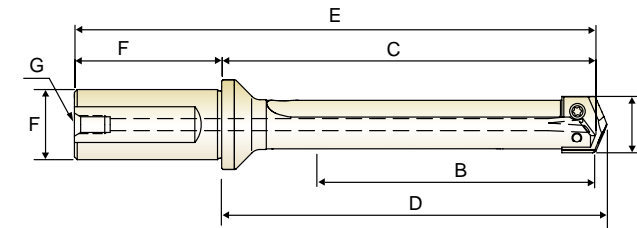

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
Y	ZY0EXSF075I	3/8 ~ 27/64	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
Z	ZZ0EXSF075I	7/16 ~ 1/2	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
0	Z00EXSF075I	33/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
0.5	Z05EXSF075I	39/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
1	Z10EXSF100I	45/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
1.5	Z15EXSF100I	55/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
2	Z20EXSF125I	31/32 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4
2.5	Z25EXSF125I	1-3/16 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4

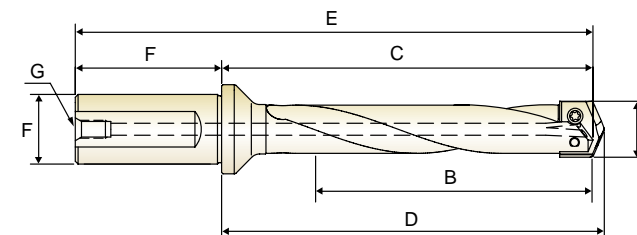

EXTENDED LENGTH - Helical Flute (Inch)


Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F		G
Y	ZY0EXHF075I	3/8 ~ 27/64	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
Z	ZZ0EXHF075I	7/16 ~ 1/2	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
0	Z00EXHF075I	33/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
0.5	Z05EXHF075I	39/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
1	Z10EXHF100I	45/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
1.5	Z15EXHF100I	55/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
2	Z20EXHF125I	31/32 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4
2.5	Z25EXHF125I	1-3/16 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4



Z**SBSF SERIES
Z**STSF SERIES


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

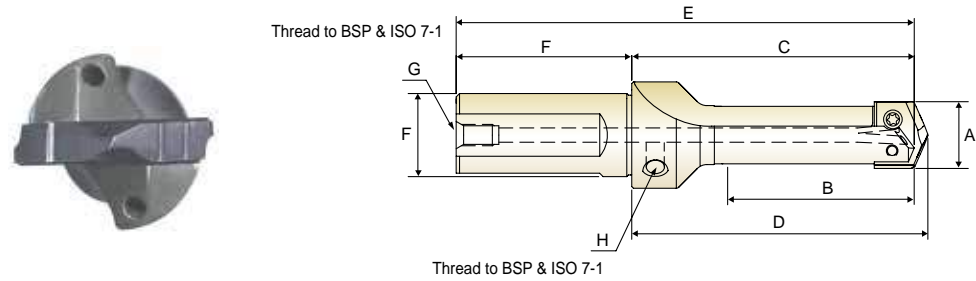

STUB LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap	
							Dia. F	Length G	Rear H	Side I
Y	ZY0SBSF016M	9.5 ~ 11.0	19.1	47.6	50.0	95.6	16.0	48.0	1/16	1/8
Z	ZZ0SBSF016M	11.5 ~ 12.5	19.1	47.6	50.0	95.6	16.0	48.0	1/16	1/8
0	Z00SBSF020M	13.0 ~ 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8	1/8
0.5	Z05SBSF020M	15.5 ~ 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8	1/8
1	Z10SBSF025M	18.0 ~ 24.0	47.6	75.8	79.4	131.8	25.0	56.0	1/8	1/8
1.5	Z15SBSF025M	22.0 ~ 24.0	57.2	88.5	92.1	144.5	25.0	56.0	1/8	1/8
2	Z20SBSF032M	25.0 ~ 35.0	57.2	88.5	92.1	148.5	32.0	60.0	1/4	1/8
2.5	Z25SBSF032M	30.0 ~ 35.0	92.1	123.4	127.0	183.4	32.0	60.0	1/4	1/8
3	Z30SBSF040M	36.0 ~ 47.0	76.2	125.0	129.8	195.0	40.0	70.0	1/4	1/4

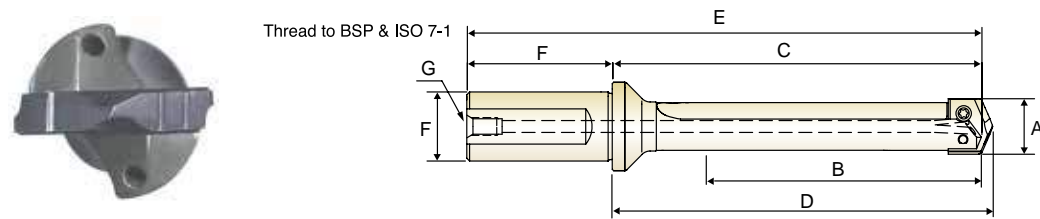

SHORT LENGTH - Straight Flute (Metric)


Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
Y	ZY0STSF020M	9.5 ~ 11.0	31.8	61.1	63.5	111.1	20.0	50.0	1/8
Z	ZZ0STSF020M	11.5 ~ 12.5	31.8	61.1	63.5	111.1	20.0	50.0	1/8
0	Z00STSF020M	13.0 ~ 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8
0.5	Z05STSF020M	15.5 ~ 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8
1	Z10STSF025M	18.0 ~ 24.0	66.7	107.2	110.7	163.2	25.0	56.0	1/8
1.5	Z15STSF025M	22.0 ~ 24.0	66.7	107.2	110.7	163.2	25.0	56.0	1/8
2	Z20STSF032M	25.0 ~ 35.0	85.7	128.6	132.2	188.6	32.0	60.0	1/4
2.5	Z25STSF032M	30.0 ~ 35.0	85.7	128.6	132.2	188.6	32.0	60.0	1/4
3	Z30STSF040M	36.0 ~ 47.0	120.7	173.0	177.8	243.0	40.0	70.0	1/4
4	Z40STSF040M	48.0 ~ 65.0	130.2	179.4	184.0	249.4	40.0	70.0	1/4



Z**ITHF SERIES
Z**SDHF SERIES


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

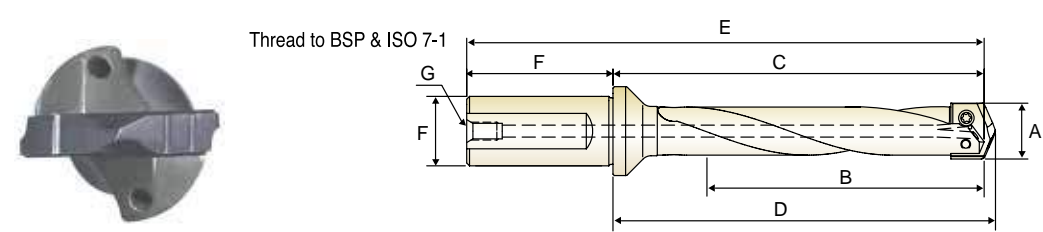

INTERMEDIATE LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
1	Z10ITHF025M	18.0 ~ 24.0	117.5	154.8	158.4	210.8	25.0	56.0	1/8
1.5	Z15ITHF025M	22.0 ~ 24.0	117.5	154.8	158.4	210.8	25.0	56.0	1/8
2	Z20ITHF032M	25.0 ~ 35.0	136.5	179.4	183.0	239.4	32.0	60.0	1/4
2.5	Z25ITHF032M	30.0 ~ 35.0	136.5	179.4	183.0	239.4	32.0	60.0	1/4
3	Z30ITHF040M	36.0 ~ 47.0	165.1	217.5	222.3	287.5	40.0	70.0	1/4

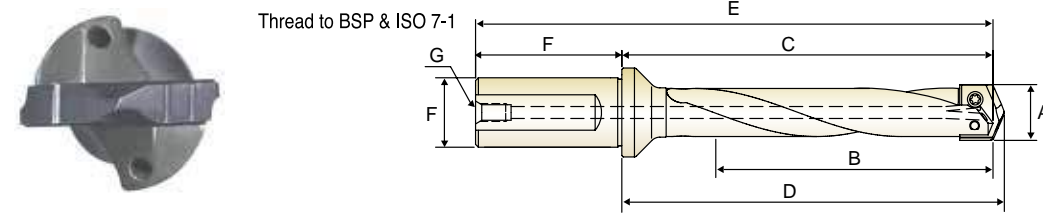


STANDARD LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
Y	ZY0SDHF020M	9.5 ~ 11.0	60.3	89.7	92.1	139.7	20.0	50.0	1/8
Z	ZZ0SDHF020M	11.5 ~ 12.5	60.3	89.7	92.1	139.7	20.0	50.0	1/8
0	Z00SDHF020M	13.0 ~ 17.5	63.5	92.1	94.9	142.1	20.0	50.0	1/8
0.5	Z05SDHF020M	15.5 ~ 17.5	63.5	92.1	94.9	142.1	20.0	50.0	1/8
1	Z10SDHF025M	18.0 ~ 24.0	168.3	205.6	209.2	261.6	25.0	56.0	1/8
1.5	Z15SDHF025M	22.0 ~ 24.0	168.3	205.6	209.2	261.6	25.0	56.0	1/8
2	Z20SDHF032M	25.0 ~ 35.0	187.3	230.2	233.8	290.2	32.0	60.0	1/4
2.5	Z25SDHF032M	30.0 ~ 35.0	187.3	230.2	233.8	290.2	32.0	60.0	1/4
3	Z30SDHF040M	36.0 ~ 47.0	209.6	261.9	266.7	331.9	40.0	70.0	1/4
4	Z40SDHF040M	48.0 ~ 65.0	231.8	281.0	285.8	351.0	40.0	70.0	1/4


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

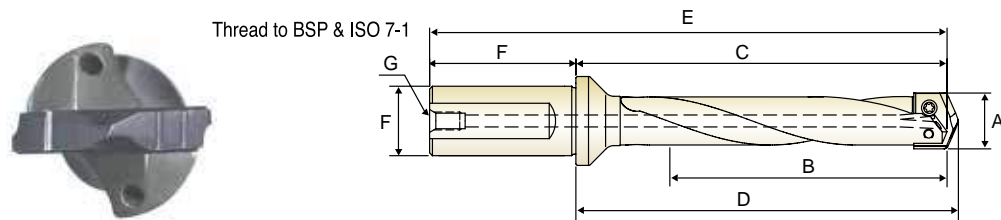

EXTENDED LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0EXHF020M	9.5 ~ 11.0	111.1	140.5	142.9	190.5	20.0	50.0	1/8
Z	ZZ0EXHF020M	11.5 ~ 12.5	111.1	140.5	142.9	190.5	20.0	50.0	1/8
0	Z00EXHF020M	13.0 ~ 17.5	114.3	142.9	145.7	192.9	20.0	50.0	1/8
0.5	Z05EXHF020M	15.5 ~ 17.5	114.3	142.9	145.7	192.9	20.0	50.0	1/8
1	Z10EXHF025M	18.0 ~ 24.0	269.9	307.2	310.8	363.2	25.0	56.0	1/8
1.5	Z15EXHF025M	22.0 ~ 24.0	269.9	307.2	310.8	363.2	25.0	56.0	1/8
2	Z20EXHF032M	25.0 ~ 35.0	288.9	331.8	335.4	391.8	32.0	60.0	1/4
2.5	Z25EXHF032M	30.0 ~ 35.0	288.9	331.8	335.4	391.8	32.0	60.0	1/4

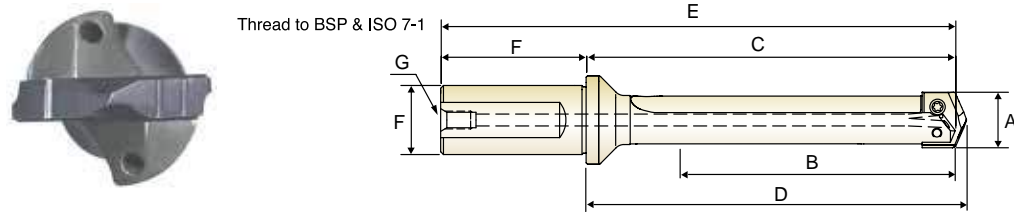


EXTENDED LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
3	Z30EXSF040M	36.0 ~ 47.0	349.3	401.6	406.4	471.6	40.0	70.0	1/4
4	Z40EXSF040M	48.0 ~ 65.0	422.3	471.5	476.3	541.5	40.0	70.0	1/4


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

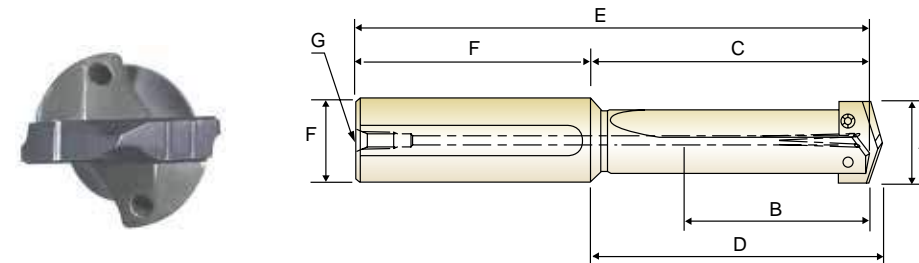

SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0STSS075I	3/8 ~ 27/64	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8
Z	ZZ0STSS075I	7/16 ~ 1/2	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8
0	Z00STSS075I	33/64 ~ 11/16	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8
0.5	Z05STSS075I	39/64 ~ 11/16	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8

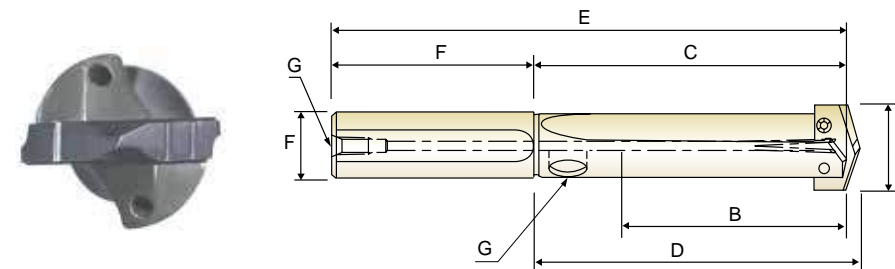


SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10STSS075I	45/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8
	Z10STSS100I	45/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8
1.5	Z15STSS075I	55/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8
	Z15STSS100I	55/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8
2	Z20STSS100I	31/32 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8
	Z20STSS125I	31/32 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8
2.5	Z25STSS100I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8
	Z25STSS125I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8
3	Z30STSS125I	1-13/32 ~ 1-7/8	4-3/4	6	6-3/16	10	1-1/4	4	1/4
	Z30STSS150I	1-13/32 ~ 1-7/8	4-3/4	6	6-3/16	10	1-1/2	4	1/4
4	Z40STSS150I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	6-11/16	10-1/2	1-1/2	4	1/4
	Z40STSS175I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	6-11/16	10-1/2	1-3/4	4	1/4
5	Z50STSS200I	2-1/2 ~ 3-1/2	6-3/4	8-1/2	8-3/4	12-1/2	2	4	1/2

STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

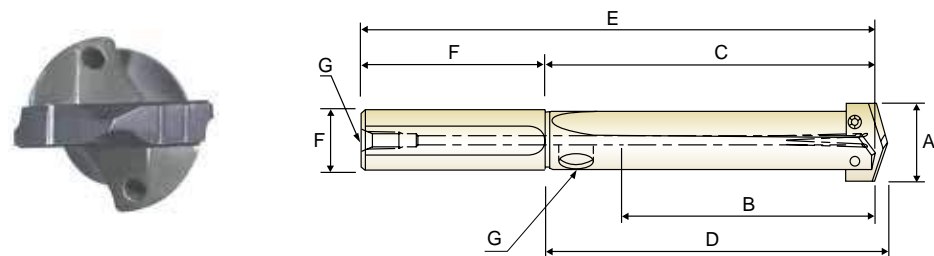


INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10ITSS100I	45/64 ~ 15/16	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8
1.5	Z15ITSS100I	55/64 ~ 15/16	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8
2	Z20ITSS125I	31/32 ~ 1-3/8	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8
2.5	Z25ITSS125I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8
3	Z30ITSS150I	1-13/32 ~ 1-7/8	6-1/2	7-3/4	7-15/16	11-3/4	1-1/2	4	1/4


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

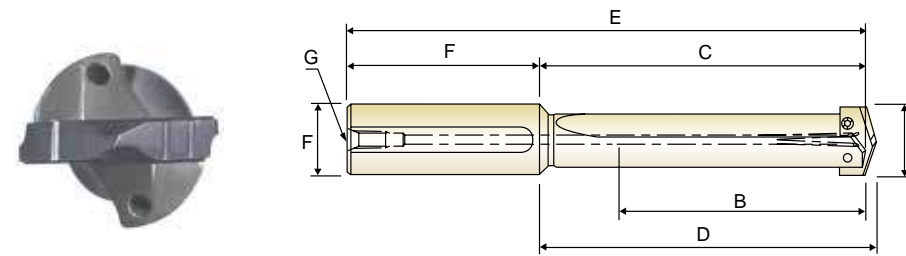

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0SDSS075I	3/8 ~ 27/64	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8
Z	<td>7/16 ~ 1/2</td> <td>2-3/8</td> <td>3-5/32</td> <td>3-1/4</td> <td>5-17/32</td> <td>3/4</td> <td>2-3/8</td> <td>1/8</td>	7/16 ~ 1/2	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8
0	Z00SDSS075I	33/64 ~ 11/16	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8
0.5	Z05SDSS075I	39/64 ~ 11/16	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8

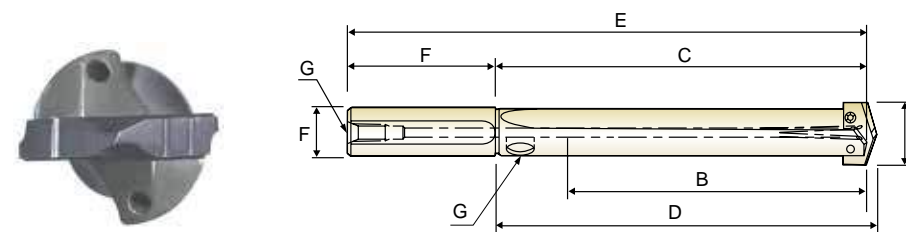


STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10SDSS075I	45/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8
	Z10SDSS100I	45/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8
1.5	Z15SDSS075I	55/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8
	Z15SDSS100I	55/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8
2	Z20SDSS100I	31/32 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8
	Z20SDSS125I	31/32 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8
2.5	Z25SDSS100I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8
	Z25SDSS125I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8
3	Z30SDSS125I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	9-11/16	13-1/2	1-1/4	4	1/4
	Z30SDSS150I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	9-11/16	13-1/2	1-1/2	4	1/4
4	Z40SDSS150I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	10-11/16	14-1/2	1-1/2	4	1/4
	Z40SDSS175I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	10-11/16	14-1/2	1-3/4	4	1/4
5	Z50SDSS200I	2-1/2 ~ 3-1/2	10-3/4	12-1/2	12-3/4	16-1/2	2	4	1/2
7	Z70SDSS300I	3-17/32 ~ 4-1/2	10-3/4	12-7/8	13-1/8	17-7/8	3	5	1/2


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

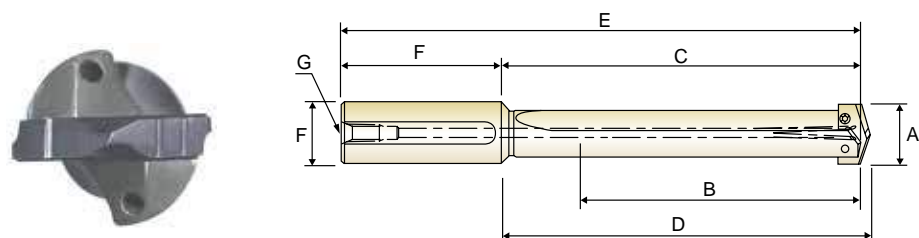

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0EXSS075I	3/8 ~ 27/64	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8
Z	ZZ0EXSS075I	7/16 ~ 1/2	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8
0	Z00EXSS075I	33/64 ~ 11/16	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8
0.5	Z05EXSS075I	39/64 ~ 11/16	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8

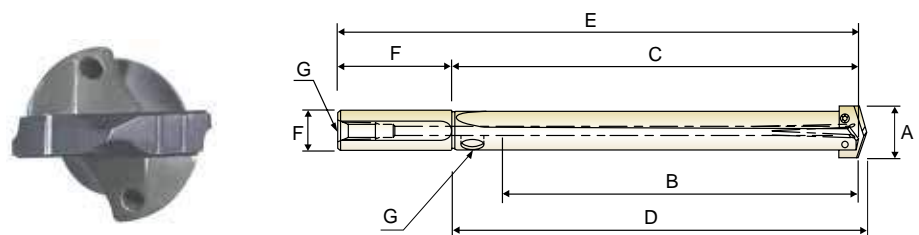


EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	Z10EXSS100I	45/64 ~ 15/16	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8
1.5	Z15EXSS100I	55/64 ~ 15/16	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8
2	Z20EXSS125I	31/32 ~ 1-3/8	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8
2.5	Z25EXSS125I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8
3	Z30EXSS125I	1-13/32 ~ 1-7/8	13-3/4	15	15-3/16	19	1-1/4	4	1/4
4	Z40EXSS150I	1-29/32 ~ 2-9/16	16-5/8	18	18-3/16	22	1-1/2	4	1/4
5	Z50EXSS200I	2-1/2 ~ 3-1/2	18-1/4	20	20-1/4	24	2	4	1/2
7	Z70EXSS300I	3-17/32 ~ 4-1/2	21-7/8	24	24-1/4	29	3	5	1/2

STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

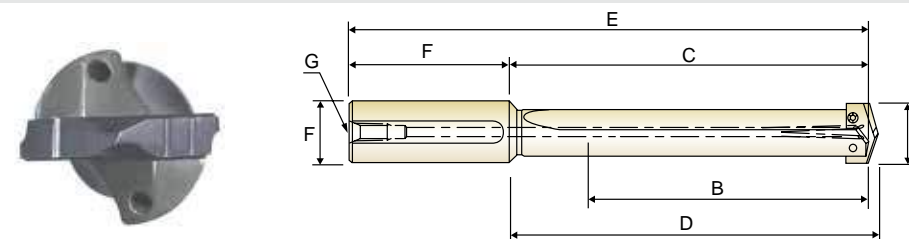


LONG LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
0	Z00LGSS075I	33/64 ~ 11/16	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8
0.5	Z05LGSS075I	39/64 ~ 11/16	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8



RECOMMENDED CUTTING CONDITIONS
EMPFOLHENE SCHNEIDKONDITIONEN

HOLDER ACCESSORIES
ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES

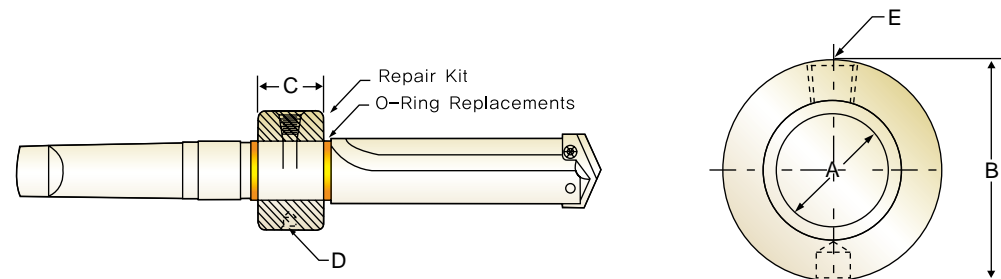

Inch

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR110048	3/4	1-3/4	7/8	5/16-NC	◆1/8	PR210048	PR310048
PR110100	1	2-1/8	1-1/8	5/16-NC	◆1/8	PR210100	PR310100
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	◆1/4	PR210116	PR310116
PR110148	1-3/4	3	1-3/8	3/8-NC	◆1/4	PR210148	PR310148
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	◆1/2	PR210216	PR310216

Metric

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR120190	19.05	44.45	22.23	M8 × 1.25	◆1/8	PR220190	PR320190
PR120254	25.40	53.97	28.57	M8 × 1.25	◆1/8	PR220254	PR320254
PR120317	31.75	63.50	34.92	M10 × 1.5	◆1/4	PR220317	PR320317
PR120444	44.45	76.20	34.92	M10 × 1.5	◆1/4	PR220444	PR320444
PR120571	57.15	95.27	44.45	M12 × 1.75	◆1/2	PR220571	PR320571

◆ Thread to BSP & ISO 7-1

TORX SCREWS

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210	J0500080	33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310		39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610	J0520150	31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710		1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810	J0530200	1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910		J0550250	2-1/2 ~ 4-1/2

** Note : Replacement screws sold in packages(10 screws per package)



RECOMMENDED CUTTING CONDITIONS
EMPFOLHENE SCHNEIDKONDITIONEN

SPADE DRILL HSS-M4

RPM = rev./min.
 FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	5	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	6		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	7											
	8											
	9	High alloyed steel, and tool steel										
	10											
	11											
M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
	13		20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
	14		24	29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.3	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
20	35		44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50	
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	23	Aluminum-cast, alloyed										
	24											
	25											
	26											
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
	28											
	29	Non Metallic Materials										
	30											
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35	Titanium Alloys										
	36											
	37											
H	38	Hardened steel										
	39											
	40	Hardened Cast Iron										
	41											

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS
EMPHOHLENE SCHNEIDKONDITIONEN

SPADE DRILL HSS-T15

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	5											
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10		High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37
	11	19		27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
	13		20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
	14		24	29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	23	Aluminum-cast, alloyed										
	24											
	25											
	26											
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
	28											
	29											
	30	Non Metallic Materials										
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	32		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	33		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	34		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	35		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	36	Titanium Alloys										
	37											
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS
EMPHOHLENE SCHNEIDKONDITIONEN

SPADE DRILL HSS-M48

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	5											
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10		High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37
	11	19		27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
M	12	Stainless steel										
	13											
	14											
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	23	Aluminum-cast, alloyed										
	24											
	25											
	26											
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
	28											
	29											
	30	Non Metallic Materials										
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	32		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	33		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	34		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	35		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	36	Titanium Alloys										
	37											
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS
EMPFOLHENE SCHNEIDKONDITIONEN

SPADE DRILL CARBIDE-K10

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)					
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	
P	1	Non-alloy steel									
	2										
	3										
	4										
	5										
	6	Low alloy steel									
	7										
	8										
	9										
	10		High alloyed steel, and tool steel								
	11										
M	12	Stainless steel									
	13										
	14										
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	16		56	70	79	0.13	0.18	0.23	0.28	0.33	
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	18		66	81	93	0.13	0.15	0.28	0.33	0.37	
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56	
20	66		81	93	0.13	0.15	0.28	0.33	0.37		
N	21	Aluminum-wrought alloy									
	22										
	23	Aluminum-cast, alloyed									
	24										
	25										
	26										
	27	Copper and Copper Alloys (Bronze / Brass)									
	28										
	29										
	30	Non Metallic Materials									
S	31	Heat Resistant Super Alloys									
	32										
	33										
	34										
	35										
	36	Titanium Alloys									
	37										
H	38	Hardened steel									
	39										
	40	Chilled Cast Iron									
	41	Hardened Cast Iron									

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS
EMPFOLHENE SCHNEIDKONDITIONEN

SPADE DRILL CARBIDE-K20

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)				
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46
	2		76	82	96	0.15	0.22	0.29	0.36	0.40
	3		66	70	84	0.15	0.22	0.28	0.36	0.40
	4		66	70	84	0.15	0.22	0.28	0.36	0.40
	5									
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42
	7		66	73	81	0.15	0.21	0.28	0.37	0.41
	8		62	70	78	0.12	0.20	0.27	0.33	0.40
	9		53	58	64	0.10	0.18	0.23	0.30	0.38
	10		High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28
	11	37		46	50	0.09	0.18	0.22	0.28	0.31
M	12	Stainless steel	38	43	47	0.10	0.18	0.20	0.24	0.30
	13		38	43	47	0.10	0.18	0.20	0.24	0.30
	14		43	49	55	0.12	0.20	0.23	0.27	0.35
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
20	66		81	93	0.13	0.15	0.28	0.33	0.37	
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53
	22		244	290	291	0.22	0.33	0.40	0.45	0.48
	23	Aluminum-cast, alloyed								
	24									
	25									
	26									
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47
	28									
	29									
	30	Non Metallic Materials								
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30
	32		38	44	46	0.15	0.17	0.20	0.21	0.25
	33		38	44	46	0.15	0.17	0.20	0.21	0.25
	34		38	44	46	0.15	0.17	0.20	0.21	0.25
	35		38	44	46	0.15	0.17	0.20	0.21	0.25
	36	Titanium Alloys								
	37									
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30
	39									
	40	Chilled Cast Iron								
	41	Hardened Cast Iron								

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN

SPADE DRILL FLAT BOTTOM HSS-T15

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)		Feed(mm/rev)			
			TiN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35
P	1	Non-alloy steel	54	60	0.12	0.18	0.22	0.30
	2		46	55	0.10	0.15	0.19	0.27
	3		45	50	0.10	0.15	0.18	0.27
	4		42	46	0.08	0.14	0.17	0.22
	5							
	6	Low alloy steel	45	46	0.10	0.16	0.19	0.29
	7		40	45	0.10	0.13	0.18	0.28
	8		38	42	0.07	0.12	0.18	0.22
	9		34	37	0.06	0.12	0.17	0.22
	10		High alloyed steel, and tool steel	27	29	0.07	0.12	0.15
	11	22		23	0.07	0.12	0.15	0.20
M	12	Stainless steel	23	25	0.13	0.15	0.18	0.22
	13		23	25	0.13	0.15	0.18	0.22
	14		26	29	0.17	0.18	0.20	0.23
K	15	Grey cast iron	51	60	0.12	0.21	0.29	0.40
	16		38	48	0.10	0.14	0.20	0.25
	17	Nodular cast iron	51	60	0.12	0.21	0.29	0.40
	18		38	48	0.10	0.14	0.20	0.25
	19	Malleable cast iron	56	66	0.13	0.25	0.35	0.41
	20		38	48	0.10	0.14	0.20	0.25
N	21	Aluminum-wrought alloy	208	213	0.17	0.28	0.36	0.43
	22		112	121	0.17	0.28	0.36	0.41
	23	Aluminum-cast, alloyed						
	24							
	25							
	26							
	27	Copper and Copper Alloys (Bronze / Brass)	48	70	0.15	0.26	0.37	0.45
	28							
	29							
	30	Non Metallic Materials						
S	31	Heat Resistant Super Alloys	20	10	0.06	0.14	0.16	0.19
	32		7	9	0.06	0.11	0.14	0.15
	33		7	9	0.06	0.11	0.14	0.15
	34		7	9	0.06	0.11	0.14	0.15
	35		7	9	0.06	0.11	0.14	0.15
	36	Titanium Alloys						
	37							
H	38	Hardened steel	23	25	0.13	0.15	0.18	0.22
	39							
	40	Chilled Cast Iron						
	41	Hardened Cast Iron						

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN

SPADE DRILL CARBIDE-P40

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)				
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46
	2		76	82	96	0.15	0.22	0.29	0.36	0.40
	3		66	70	84	0.15	0.22	0.28	0.36	0.40
	4		66	70	84	0.15	0.22	0.28	0.36	0.40
	5									
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42
	7		66	73	81	0.15	0.21	0.28	0.37	0.41
	8		62	70	78	0.12	0.20	0.27	0.33	0.40
	9		53	58	64	0.10	0.18	0.23	0.30	0.38
	10		High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28
	11	37		46	50	0.09	0.18	0.22	0.28	0.31
M	12	Stainless steel	38	43	47	0.10	0.18	0.20	0.24	0.30
	13		38	43	47	0.10	0.18	0.20	0.24	0.30
	14		43	49	55	0.12	0.20	0.23	0.27	0.35
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
	20		66	81	93	0.13	0.15	0.28	0.33	0.37
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53
	22		244	290	291	0.22	0.33	0.40	0.45	0.48
	23	Aluminum-cast, alloyed								
	24									
	25									
	26									
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47
	28									
	29									
	30	Non Metallic Materials								
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30
	32		38	44	46	0.15	0.17	0.20	0.21	0.25
	33		38	44	46	0.15	0.17	0.20	0.21	0.25
	34		38	44	46	0.15	0.17	0.20	0.21	0.25
	35		38	44	46	0.15	0.17	0.20	0.21	0.25
	36	Titanium Alloys								
	37									
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30
	39									
	40	Chilled Cast Iron								
	41	Hardened Cast Iron								

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HOLEMAKING



CARBIDE, HSS & HSS-E

REAMERS

REIBAHLEN

- Carbide NC Machine Reamers
HSS Hand Reamers, HSS-E Chucking Reamers
- Hartmetall NC Maschinenreibahlen
HSS-Handreibahlen, HSS-E Spannfutter-Reibahlen

SELECTION GUIDE



SERIES	K4101	K4111
HOLETYPE		
FLUTETYPE	Straight	LH Spiral
SIZE MIN	D2.0	D2.0
SIZE MAX	D20.0	D20.0
PAGE	406	407

SURFACE TREATMENT

Bright

CARBIDE, HSS & HSS-E REAMERS

Carbide NC Machine Reamers
HSS Hand Reamers
HSS-E Chucking Reamers



◎ : Excellent ○ : Good

Recommended cutting conditions : P.427

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	K4101	K4111
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	○	○
	5		About 0.75% C Quenched & Tempered	300	32	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	◎	◎
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	○
	M	11		Quenched & Tempered	325	35	○
12		Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○
13			Martensitic Quenched & Tempered	240	23	○	○
14			Austenitic	180	10	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3	◎	◎
	18		Pearlitic	250	25	○	○
	19		Ferritic	130		◎	◎
20	Malleable cast iron	Pearlitic	230	21	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○
	22		Curable Hardened	100		○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○
	24		≤ 12% Si, Curable Hardened	90		○	○
	25		> 12% Si, Not Curable	130		○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○
	27		CuZn, CuSnZn (Brass)	90		○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Ni or Co Based Cured	350	38		
	35	Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		

K1143	K1153	K2101	K2111	K2121	K2102	K2112	K21B1
Straight	LH Spiral	Straight	LH Spiral	LH Spiral (Quick Spiral)	Straight	LH Spiral	LH Spiral
D2.0	D2.0	D2.0	D2.0	D4.0	D10.0	D10.0	D2.0
D60.0	D60.0	D20.0	D20.0	D20.0	D50.0	D50.0	D20.0
408	410	412	414	416	417	419	421

Bright




○	○	◎	◎	○	◎	◎	◎	1
○	○	◎	◎	○	◎	◎	◎	2
		○	○		○	○	○	3
		○	○		○	○	○	4
								5
○	○	◎	◎	○	◎	◎	◎	6 P
		○	○		○	○	○	7
								8
								9
		○	○		○	○	○	10
								11
		○	○		○	○	○	12
		○	○		○	○	○	13 M
		○	○		○	○	○	14
		○	○		○	○	○	15
		○	○		○	○	○	16
		○	○		○	○	○	17 K
		○	○		○	○	○	18
		○	○		○	○	○	19
		○	○		○	○	○	20
○	○	○	○	◎	○	○	○	21
○	○	○	○	◎	○	○	○	22
○	○	○	○	◎	○	○	○	23
○	○	○	○	◎	○	○	○	24
								25
○	○	○	○	◎	○	○	○	26 N
○	○	○	○	◎	○	○	○	27
○	○	○	○	◎	○	○	○	28
								29
								30
								31
								32
								33
								34 S
								35
								36
								37
								38
								39
								40
								41

CARBIDE, NC MACHINE REAMERS - STRAIGHT FLUTES

- VHM, NC-MASCHINENREIBAHLEN - GERADEGENUTET
- ALÉSOIRS CARBURE MACHINE CN - ENTRÉE DROITE
- ALESATORI A MACCHINA IN MD - ELICA DRIITA

- ▶ Material - Up to Ø12.0 : Solid Carbide
- Over Ø12.0 : Carbide Head Brazed
- ▶ Straight Flutes, Right Hand Cut
- ▶ Unequal Flute Spacing
- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank : DIN 6535-HA
- ▶ Chamfer Angle - D<3.0 : 15°
- D≥3.0 : 45°

- ▶ Material - bis Ø12,0 : VHM
- über Ø12,0 : gelötete VHM-Köpfe
- ▶ geradegenutet, rechtsschneidend
- ▶ Ungleichteilung
- ▶ Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft : DIN 6535-HA
- ▶ Ansnittwinkel - bis Ø3,0 : 15°
- über Ø3,0 : 45°

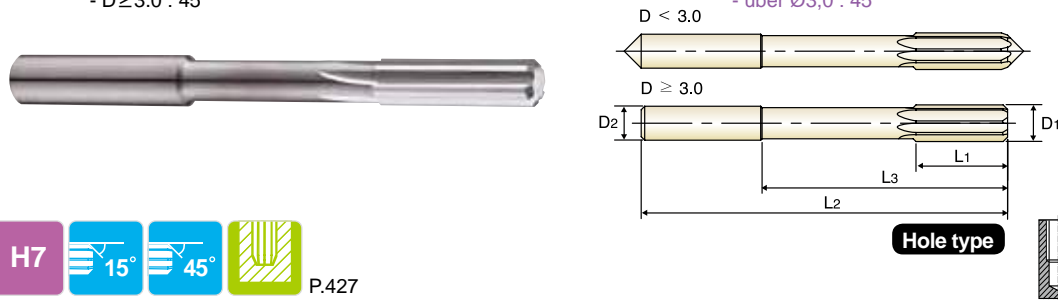

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Cutting Length		Neck Length		Overall Length		No. of Flute
	D1	D2	D2	D2	L1	L3	L3	L2	L2		
K410100200	2.0	4	4	4	11	20	20	50	4		
K410100250	2.5	4	4	4	14	26	26	57	4		
K410100300	3.0	4	4	4	15	31	31	61	6		
K410100350	3.5	4	4	4	18	36	36	70	6		
K410100400	4.0	4	4	4	19	42	42	75	6		
K410100450	4.5	6	6	6	21	46	46	80	6		
K410100500	5.0	6	6	6	23	51	51	86	6		
K410100550	5.5	6	6	6	26	56	56	93	6		
K410100600	6.0	6	6	6	26	56	56	93	6		
K410100650	6.5	8	8	8	28	62	62	101	6		
K410100700	7.0	8	8	8	31	68	68	109	6		
K410100750	7.5	8	8	8	31	68	68	109	6		
K410100800	8.0	8	8	8	33	74	74	117	6		
K410100850	8.5	10	10	10	33	74	74	117	6		
K410100900	9.0	10	10	10	36	80	80	125	6		
K410100950	9.5	10	10	10	36	80	80	125	6		
K410101000	10.0	10	10	10	38	86	86	133	6		
K410101050	10.5	12	12	12	38	86	86	133	6		
K410101100	11.0	12	12	12	41	95	95	142	6		
K410101200	12.0	12	12	12	44	104	104	151	6		
K410101300	13.0	16	16	16	44	104	104	151	6		
K410101400	14.0	16	16	16	47	108	108	160	8		
K410101500	15.0	16	16	16	50	110	110	162	8		
K410101600	16.0	16	16	16	52	118	118	170	8		
K410101700	17.0	20	20	20	54	121	121	175	8		
K410101800	18.0	20	20	20	56	128	128	182	8		
K410101900	19.0	20	20	20	58	129	129	189	8		
K410102000	20.0	20	20	20	60	135	135	195	8		

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○	

CARBIDE, NC MACHINE REAMERS - LH SPIRAL FLUTES

- VHM, NC-MASCHINENREIBAHLEN - SPIRALGENUTET mit LINKSDRALL
- ALÉSOIRS CARBURE MACHINE CN - HÉLICE À GAUCHE
- ALESATORI A MACCHINA IN MD - ELICA SINISTRA

- ▶ Material - Up to Ø12.0 : Solid Carbide
- Over Ø12.0 : Carbide Head Brazed
- ▶ Left Spiral Flutes, Right Hand Cut
- ▶ Unequal Flute Spacing
- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank : DIN 6535-HA
- ▶ Chamfer Angle - D<3.0 : 15°
- D≥3.0 : 45°

- ▶ Material - bis Ø12,0 : VHM
- über Ø12,0 : gelötete VHM-Köpfe
- ▶ linksspiralig, rechtsschneidend
- ▶ Ungleichteilung
- ▶ Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft : DIN 6535-HA
- ▶ Ansnittwinkel - bis Ø3,0 : 15°
- über Ø3,0 : 45°

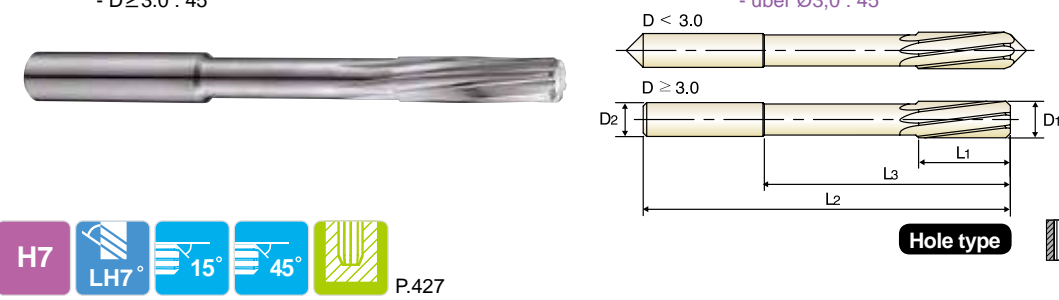

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Cutting Length		Neck Length		Overall Length		No. of Flute
	D1	D2	D2	D2	L1	L3	L3	L2	L2		
K411100200	2.0	4	4	4	11	20	20	50	4		
K411100250	2.5	4	4	4	14	26	26	57	4		
K411100300	3.0	4	4	4	15	31	31	61	6		
K411100350	3.5	4	4	4	18	36	36	70	6		
K411100400	4.0	4	4	4	19	42	42	75	6		
K411100450	4.5	6	6	6	21	46	46	80	6		
K411100500	5.0	6	6	6	23	51	51	86	6		
K411100550	5.5	6	6	6	26	56	56	93	6		
K411100600	6.0	6	6	6	26	56	56	93	6		
K411100650	6.5	8	8	8	28	62	62	101	6		
K411100700	7.0	8	8	8	31	68	68	109	6		
K411100750	7.5	8	8	8	31	68	68	109	6		
K411100800	8.0	8	8	8	33	74	74	117	6		
K411100850	8.5	10	10	10	33	74	74	117	6		
K411100900	9.0	10	10	10	36	80	80	125	6		
K411100950	9.5	10	10	10	36	80	80	125	6		
K411101000	10.0	10	10	10	38	86	86	133	6		
K411101050	10.5	12	12	12	38	86	86	133	6		
K411101100	11.0	12	12	12	41	95	95	142	6		
K411101200	12.0	12	12	12	44	104	104	151	6		
K411101300	13.0	16	16	16	44	104	104	151	6		
K411101400	14.0	16	16	16	47	108	108	160	8		
K411101500	15.0	16	16	16	50	110	110	162	8		
K411101600	16.0	16	16	16	52	118	118	170	8		
K411101700	17.0	20	20	20	54	121	121	175	8		
K411101800	18.0	20	20	20	56	128	128	182	8		
K411101900	19.0	20	20	20	58	129	129	189	8		
K411102000	20.0	20	20	20	60	135	135	195	8		

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○	




K1143 SERIES

HSS, HAND REAMERS - STRAIGHT FLUTES

- HSS, HANDREIBAHLEN - GERADEGENUTET
- ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
- ALESATORI A MANO IN HSS - ELICA SINISTRA

- O.D. Tolerances : DIN 1420 for H7
- Shank Diameter ≈ Nominal Reamer Diameter
- Straight Flutes / Right Hand Cut
- Chamfer Angle- tapered
- Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers

- Schneiden-Ø Toleranzen : DIN 1420 für H7
- Schaft-Ø = Nomineller Reibahlen-Ø
- Geradegenutet / Rechtsschneidend
- Anschnittwinkel - Konisch
- Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

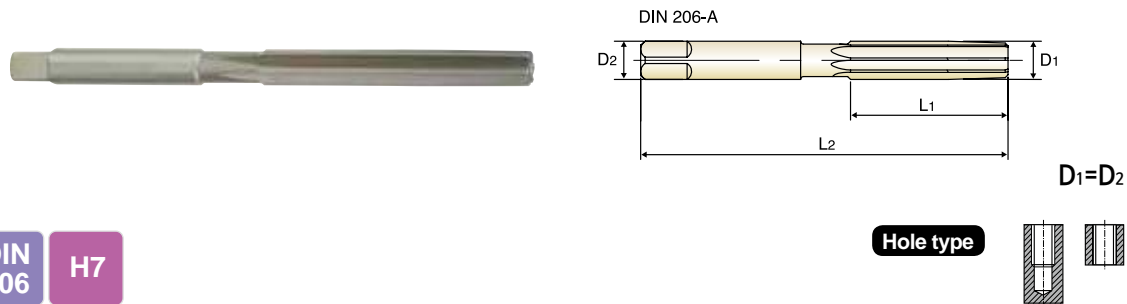

HSS DIN 206 H7



Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K114300200	2.0	25	50	4
K114300220	2.2	27	54	4
K114300250	2.5	29	58	4
K114300280	2.8	31	62	4
K114300300	3.0	31	62	6
K114300320	3.2	33	66	6
K114300350	3.5	35	71	6
K114300400	4.0	38	76	6
K114300450	4.5	41	81	6
K114300500	5.0	44	87	6
K114300550	5.5	47	93	6
K114300600	6.0	47	93	6
K114300700	7.0	54	107	6
K114300800	8.0	58	115	6
K114300900	9.0	62	124	6
K114301000	10.0	66	133	6
K114301100	11.0	71	142	6
K114301200	12.0	76	152	6
K114301300	13.0	76	152	6
K114301400	14.0	81	163	8
K114301500	15.0	81	163	8
K114301600	16.0	87	175	8
K114301700	17.0	87	175	8
K114301800	18.0	93	188	8
K114301900	19.0	93	188	8
K114302000	20.0	100	201	8
K114302200	22.0	107	215	8
K114302400	24.0	115	231	8

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														

ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														




K1143 SERIES

HSS, HAND REAMERS - STRAIGHT FLUTES

- HSS, HANDREIBAHLEN - GERADEGENUTET
- ALÉSOIRS HSS À MAIN - ENTRÉE DROITE
- ALESATORI A MANO IN HSS - ELICA DITTA

- O.D. Tolerances : DIN 1420 for H7
- Shank Diameter ≈ Nominal Reamer Diameter
- Straight Flutes / Right Hand Cut
- Chamfer Angle- tapered
- Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers

- Schneiden-Ø Toleranzen : DIN 1420 für H7
- Schaft-Ø = Nomineller Reibahlen-Ø
- Geradegenutet / Rechtsschneidend
- Anschnittwinkel - Konisch
- Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

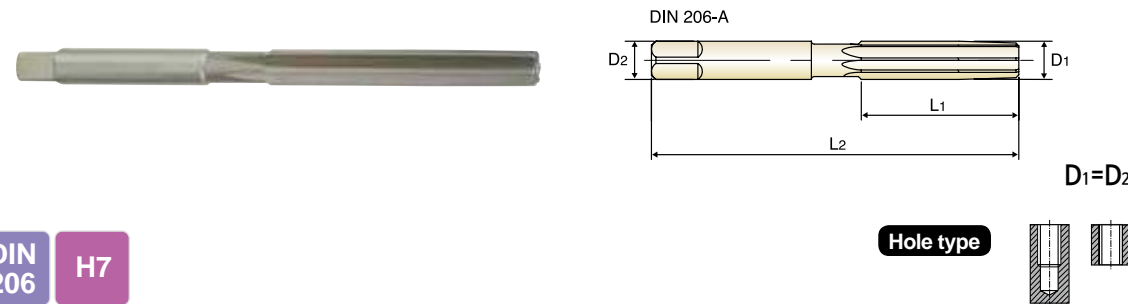

HSS DIN 206 H7



Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K114302500	25.0	115	231	8
K114302600	26.0	115	231	8
K114302700	27.0	124	247	10
K114302800	28.0	124	247	10
K114302900	29.0	124	247	10
K114303000	30.0	124	247	10
K114303100	31.0	133	265	10
K114303200	32.0	133	265	10
K114303300	33.0	133	265	10
K114303400	34.0	142	284	10
K114303500	35.0	142	284	10
K114303600	36.0	142	284	10
K114303700	37.0	142	284	10
K114303800	38.0	152	305	10
K114303810	38.1	152	305	10
K114303900	39.0	152	305	10
K114304000	40.0	152	305	10
K114304100	41.0	152	305	12
K114304200	42.0	152	305	12
K114304300	43.0	163	326	12
K114304400	44.0	163	326	12
K114304500	45.0	163	326	12
K114304600	46.0	163	326	12
K114304700	47.0	163	326	12
K114304800	48.0	174	347	12
K114304900	49.0	174	347	12
K114305200	52.0	174	347	12
K114306000	60.0	184	367	12

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														

ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														




K1153 SERIES

HSS, HAND REAMERS - LH SPIRAL FLUTES

- HSS, HAND REAMERS - LH SPIRAL FLUTES
- ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
- ALESATORI A MANO IN HSS - ELICA SINISTRA

- O.D. Tolerances : DIN 1420, H7
- Shank Diameter = Nominal Reamer Diameter
- LH Spiral Flutes / Right Hand Cut
- Chamfer Angle - tapered
- Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers

- Schneiden-Ø Toleranzen : DIN 1420 für H7
- Schaft-Ø = Nomineller Reibahlen-Ø
- Spiralgenutet mit Linksdraht / Rechtsschneidend
- Anschnittwinkel - Konisch
- Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

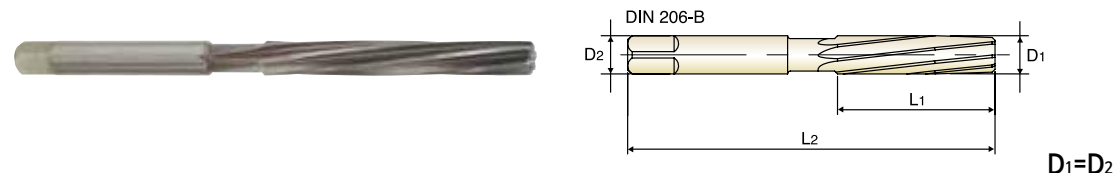

Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K115300200	2.0	25	50	4
K115300220	2.2	27	54	4
K115300250	2.5	29	58	4
K115300280	2.8	31	62	4
K115300300	3.0	31	62	6
K115300320	3.2	33	66	6
K115300350	3.5	35	71	6
K115300400	4.0	38	76	6
K115300450	4.5	41	81	6
K115300500	5.0	44	87	6
K115300550	5.5	47	93	6
K115300600	6.0	47	93	6
K115300700	7.0	54	107	6
K115300800	8.0	58	115	6
K115300900	9.0	62	124	6
K115301000	10.0	66	133	6
K115301100	11.0	71	142	6
K115301200	12.0	76	152	6
K115301300	13.0	76	152	6
K115301400	14.0	81	163	8
K115301500	15.0	81	163	8
K115301600	16.0	87	175	8
K115301700	17.0	87	175	8
K115301800	18.0	93	188	8
K115301900	19.0	93	188	8
K115302000	20.0	100	201	8
K115302200	22.0	107	215	8
K115302400	24.0	115	231	8

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														

ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														




K1153 SERIES

HSS, HAND REAMERS - LH SPIRAL FLUTES

- HSS, HAND REAMERS - LH SPIRAL FLUTES
- ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
- ALESATORI A MANO IN HSS - ELICA SINISTRA

- O.D. Tolerances : DIN 1420, H7
- Shank Diameter = Nominal Reamer Diameter
- LH Spiral Flutes / Right Hand Cut
- Chamfer Angle - tapered
- Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers

- Schneiden-Ø Toleranzen : DIN 1420 für H7
- Schaft-Ø = Nomineller Reibahlen-Ø
- Geradegenutet / Rechtsschneidend
- Anschnittwinkel - Konisch
- Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

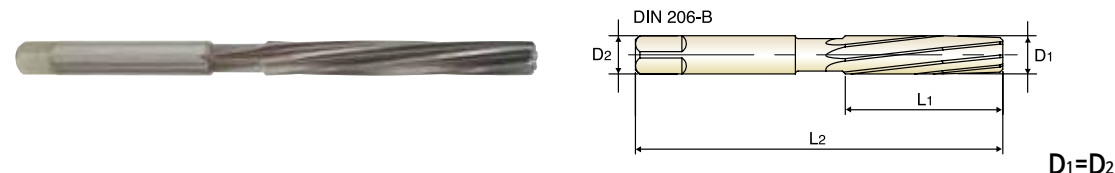

Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K115302500	25.0	115	231	8
K115302600	26.0	115	231	8
K115302700	27.0	124	247	10
K115302800	28.0	124	247	10
K115302900	29.0	124	247	10
K115303000	30.0	124	247	10
K115303100	31.0	133	265	10
K115303200	32.0	133	265	10
K115303300	33.0	133	265	10
K115303400	34.0	142	284	10
K115303500	35.0	142	284	10
K115303600	36.0	142	284	10
K115303700	37.0	142	284	10
K115303800	38.0	152	305	10
K115303810	38.1	152	305	10
K115303900	39.0	152	305	10
K115304000	40.0	152	305	10
K115304100	41.0	152	305	12
K115304200	42.0	152	305	12
K115304300	43.0	163	326	12
K115304400	44.0	163	326	12
K115304500	45.0	163	326	12
K115304600	46.0	163	326	12
K115304700	47.0	163	326	12
K115304800	48.0	174	347	12
K115304900	49.0	174	347	12
K115305200	52.0	174	347	12
K115306000	60.0	184	367	12

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														


ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - STRAIGHT FLUTES

- HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE DROIT- ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA DRITTA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

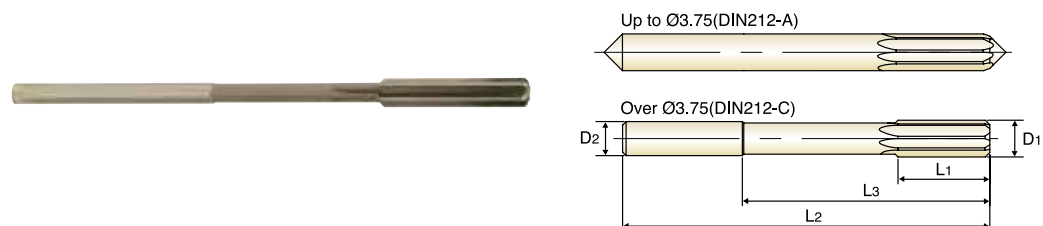

HSS-E DIN 212 H7 15° 45° P.428



Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K210100200	2.0	2	11	-	49	4
K210100220	2.2	2.2	12	-	53	4
K210100250	2.5	2.5	14	-	57	4
K210100260	2.6	2.6	14	-	57	4
K210100280	2.8	2.8	15	-	61	4
K210100300	3.0	3	15	-	61	6
K210100310	3.1	3.1	16	-	65	6
K210100320	3.2	3.2	16	-	65	6
K210100350	3.5	3.5	18	-	70	6
K210100360	3.6	3.6	18	-	70	6
K210100370	3.7	3.7	18	-	70	6
K210100400	4.0	4	19	42	75	6
K210100430	4.3	4.5	21	46	80	6
K210100450	4.5	4.5	21	46	80	6
K210100460	4.6	4.5	21	46	80	6
K210100500	5.0	5	23	51	86	6
K210100550	5.5	5.6	26	56	93	6
K210100560	5.6	5.6	26	56	93	6
K210100600	6.0	5.6	26	56	93	6
K210100650	6.5	6.3	28	62	101	6
K210100700	7.0	7.1	31	68	109	6
K210100720	7.2	7.1	31	68	109	6
K210100800	8.0	8	33	74	117	6
K210100830	8.3	8	33	74	117	6
K210100850	8.5	8	33	74	117	6
K210100900	9.0	9	36	80	125	6

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	


ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - STRAIGHT FLUTES

- HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE DROIT- ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA DRITTA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

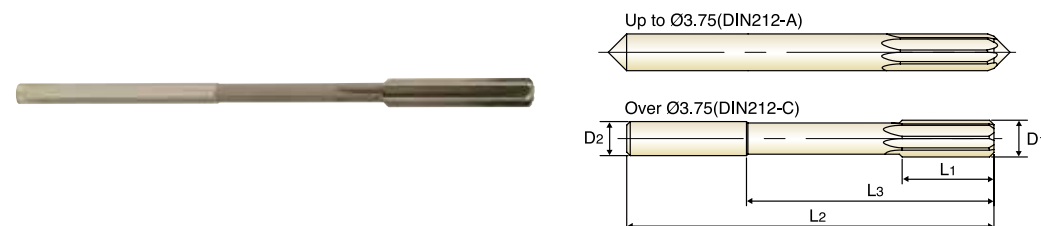

HSS-E DIN 212 H7 15° 45° P.428



Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K210100950	9.5	9	36	80	125	6
K210101000	10.0	10	38	86	133	6
K210101050	10.5	10	38	86	133	6
K210101100	11.0	10	41	95	142	6
K210101200	12.0	10	44	104	151	6
K210101300	13.0	10	44	104	151	6
K210101400	14.0	12.5	47	108	160	8
K210101500	15.0	12.5	50	110	162	8
K210101600	16.0	12.5	52	118	170	8
K210101700	17.0	14	54	121	175	8
K210101800	18.0	14	56	128	182	8
K210101900	19.0	16	58	129	189	8
K210102000	20.0	16	60	135	195	8

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	


ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES

● HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRALL
 ○ ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE
 ○ ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Ansnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

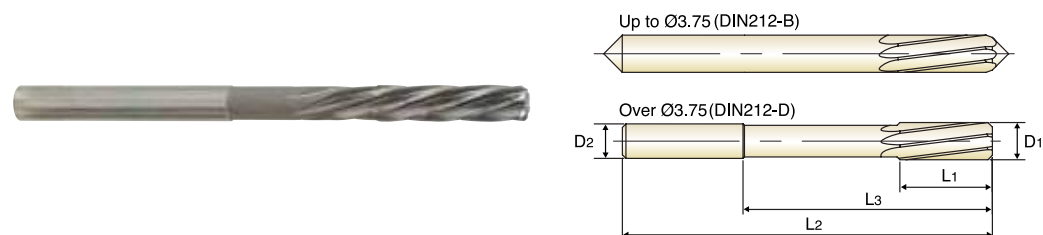

HSS-E DIN 212 H7 LH7° 15° 45° P.428



Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K211100200	2.0	2	11	-	49	4
K211100220	2.2	2.2	12	-	53	4
K211100250	2.5	2.5	14	-	57	4
K211100260	2.6	2.6	14	-	57	4
K211100280	2.8	2.8	15	-	61	4
K211100300	3.0	3	15	-	61	6
K211100310	3.1	3.1	16	-	65	6
K211100320	3.2	3.2	16	-	65	6
K211100350	3.5	3.5	18	-	70	6
K211100360	3.6	3.6	18	-	70	6
K211100370	3.7	3.7	18	-	70	6
K211100400	4.0	4	19	42	75	6
K211100430	4.3	4.5	21	46	80	6
K211100450	4.5	4.5	21	46	80	6
K211100460	4.6	4.5	21	46	80	6
K211100500	5.0	5	23	51	86	6
K211100550	5.5	5.6	26	56	93	6
K211100560	5.6	5.6	26	56	93	6
K211100600	6.0	5.6	26	56	93	6
K211100650	6.5	6.3	28	62	101	6
K211100700	7.0	7.1	31	68	109	6
K211100720	7.2	7.1	31	68	109	6
K211100800	8.0	8	33	74	117	6
K211100830	8.3	8	33	74	117	6

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	


ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	35	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES

● HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRALL
 ○ ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE
 ○ ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Ansnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

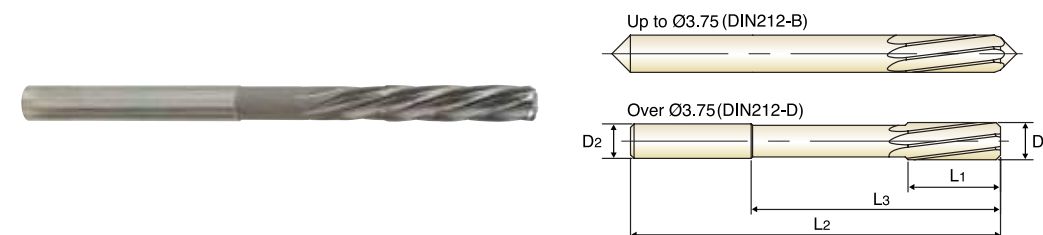

HSS-E DIN 212 H7 LH7° 15° 45° P.428



Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K211100850	8.5	8	33	74	117	6
K211100900	9.0	9	36	80	125	6
K211100950	9.5	9	36	80	125	6
K211101000	10.0	10	38	86	133	6
K211101050	10.5	10	38	86	133	6
K211101100	11.0	10	41	95	142	6
K211101200	12.0	10	44	104	151	6
K211101300	13.0	10	44	104	151	6
K211101400	14.0	12.5	47	108	160	8
K211101500	15.0	12.5	50	110	162	8
K211101600	16.0	12.5	52	118	170	8
K211101700	17.0	14	54	121	175	8
K211101800	18.0	14	56	128	182	8
K211101900	19.0	16	58	129	189	8
K211102000	20.0	16	60	135	195	8




K2121 SERIES

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES (QUICK SPIRAL)

- HSS-E, MASCHINEN - SCHÄLREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRAL
- ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE (HÉLICE RAPIDE)
- ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA RAPIDA, SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank Diameter Tolerances : h8
- ▶ Chamfer Angle - tapered
- ▶ LH High Spiral Flutes / Right Hand Cut

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø Toleranzen : h8
- ▶ Anschnittwinkel - Konisch
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend

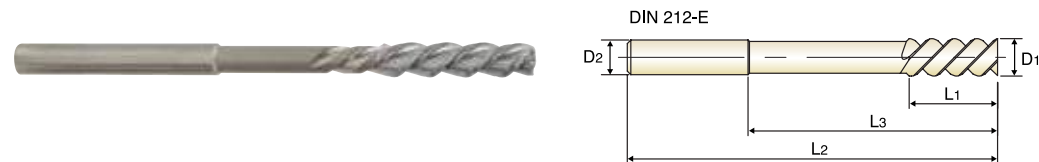

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K212100400	4.0	4	19	42	75	3
K212100450	4.5	4.5	21	46	80	3
K212100500	5.0	5	23	51	86	3
K212100550	5.5	5.6	26	56	93	3
K212100600	6.0	5.6	26	56	93	3
K212100650	6.5	6.3	28	62	101	3
K212100700	7.0	7.1	31	68	109	3
K212100800	8.0	8	33	74	117	3
K212100850	8.5	8	33	74	117	3
K212100900	9.0	9	36	80	125	3
K212100950	9.5	9	36	80	125	3
K212101000	10.0	10	38	86	133	3
K212101100	11.0	10	41	95	142	3
K212101200	12.0	10	44	104	151	3
K212101300	13.0	10	44	104	151	3
K212101400	14.0	12.5	47	108	160	4
K212101500	15.0	12.5	50	110	162	4
K212101600	16.0	12.5	52	118	170	4
K212101700	17.0	14	54	121	175	4
K212101800	18.0	14	56	128	182	4
K212101900	19.0	16	58	129	189	4
K212102000	20.0	16	60	135	195	4

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72
HB	125	190	250	270	300	180	275	300	350	350	200	240	240	180	180	260	3	25	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎			◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




K2102 SERIES

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - STRAIGHT FLUTES

- HSS-E, MASCHINENREIBAHLE mit MK - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CONICO - TAGLIANTI DRITTI

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



Unit : mm

EDP No.	Reamer Diameter	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
	D1		L1	L2	
K210201000	10.0	1	38	168	6
K210201100	11.0	1	41	175	6
K210201200	12.0	1	44	182	6
K210201300	13.0	1	44	182	6
K210201400	14.0	1	47	189	8
K210201500	15.0	2	50	204	8
K210201600	16.0	2	52	210	8
K210201700	17.0	2	54	214	8
K210201800	18.0	2	56	219	8
K210201900	19.0	2	58	223	8
K210202000	20.0	2	60	228	8
K210202100	21.0	2	62	232	8
K210202200	22.0	2	64	237	8
K210202300	23.0	2	66	241	8
K210202400	24.0	3	68	268	8
K210202500	25.0	3	68	268	8
K210202600	26.0	3	70	273	8
K210202700	27.0	3	71	277	10
K210202800	28.0	3	71	277	10
K210202900	29.0	3	73	281	10
K210203000	30.0	3	73	281	10
K210203100	31.0	3	75	285	10
K210203200	32.0	4	77	317	10
K210203400	34.0	4	78	321	10
K210203500	35.0	4	78	321	10
K210203600	36.0	4	79	325	10

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72
HB	125	190	250	270	300	180	275	300	350	350	200	240	240	180	180	260	3	25	130	230
Recommended	◎	◎	○	○	○	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○




K2102 SERIES

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - STRAIGHT FLUTES

- HSS-E, MASCHINENREIBAHLE mit MK - GERADEGENUTET
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - ENTRÉE DROITE
- ALESATORI IN HSS-E, ATTACCO CONICO - TAGLIENTI DRITTI

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Straight Flute / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Geradenutet / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



Unit : mm

EDP No.	Reamer Diameter D1	No. of Morse Taper	Cutting Length L1	Overall Length L2	No. of Flute
K210203800	38.0	4	81	329	10
K210204000	40.0	4	81	329	10
K210204100	41.0	4	82	333	12
K210204200	42.0	4	82	333	12
K210204300	43.0	4	83	336	12
K210204400	44.0	4	83	336	12
K210204500	45.0	4	83	336	12
K210204600	46.0	4	84	340	12
K210204700	47.0	4	84	340	12
K210204800	48.0	4	86	344	12
K210205000	50.0	4	86	344	12

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO Material Description	N										S					H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			




K2112 SERIES

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - LH SPIRAL FLUTES

- HSS-E, MASCHINENREIBAHLE mit MK - SPIRALGENUTET mit LINKSDRALL
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - HÉLICE À GAUCHE
- ALESATORI IN HSS-E, ATTACCO CONICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



Unit : mm

EDP No.	Reamer Diameter D1	No. of Morse Taper	Cutting Length L1	Overall Length L2	No. of Flute
K211201000	10.0	1	38	168	6
K211201100	11.0	1	41	175	6
K211201200	12.0	1	44	182	6
K211201300	13.0	1	44	182	6
K211201400	14.0	1	47	189	8
K211201500	15.0	2	50	204	8
K211201600	16.0	2	52	210	8
K211201700	17.0	2	54	214	8
K211201800	18.0	2	56	219	8
K211201900	19.0	2	58	223	8
K211202000	20.0	2	60	228	8
K211202100	21.0	2	62	232	8
K211202200	22.0	2	64	237	8
K211202300	23.0	2	66	241	8
K211202400	24.0	3	68	268	8
K211202500	25.0	3	68	268	8
K211202600	26.0	3	70	273	8
K211202700	27.0	3	71	277	10
K211202800	28.0	3	71	277	10
K211202900	29.0	3	73	281	10
K211203000	30.0	3	73	281	10
K211203100	31.0	3	75	285	10
K211203200	32.0	4	77	317	10
K211203400	34.0	4	78	321	10
K211203500	35.0	4	78	321	10
K211203600	36.0	4	79	325	10

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO Material Description	N										S					H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - LH SPIRAL FLUTES

- HSS-E, MASCHINENREIBAHLE mit MK - SPIRALGENUTET mit LINKSDRALL
- ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - HÉLICE À GAUCHE
- ALESATORI IN HSS-E, ATTACCO CONICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle : 45°

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Spiralgenutet mit Linksdraht / Rechtsschneidend
- ▶ Anschnittwinkel : 45°



Unit : mm



EDP No.	Reamer Diameter	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
	D1		L1	L2	
K211203800	38.0	4	81	329	10
K211204000	40.0	4	81	329	10
K211204100	41.0	4	82	333	12
K211204200	42.0	4	82	333	12
K211204300	43.0	4	83	336	12
K211204400	44.0	4	83	336	12
K211204500	45.0	4	83	336	12
K211204600	46.0	4	84	340	12
K211204700	47.0	4	84	340	12
K211204800	48.0	4	86	344	12
K211205000	50.0	4	86	344	12

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsschneidend
- ▶ Anschnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

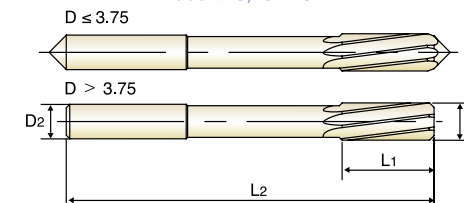

up to Ø3.75 over Ø3.75



Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
K21B100200	2.0	2	11	49
K21B100201	2.01	2	11	49
K21B100202	2.02	2	11	49
K21B100203	2.03	2	11	49
K21B100210	2.1	2	11	49
K21B100220	2.2	3	12	53
K21B100230	2.3	3	12	53
K21B100240	2.4	3	14	57
K21B100247	2.47	3	14	57
K21B100248	2.48	3	14	57
K21B100249	2.49	3	14	57
K21B100250	2.5	3	14	57
K21B100251	2.51	3	14	57
K21B100252	2.52	3	14	57
K21B100253	2.53	3	14	57
K21B100260	2.6	3	14	57
K21B100270	2.7	3	15	61
K21B100280	2.8	3	15	61
K21B100290	2.9	3	15	61
K21B100297	2.97	3	15	61
K21B100298	2.98	3	15	61
K21B100299	2.99	3	15	61
K21B100300	3.0	3	15	61
K21B100301	3.01	4	16	65

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○





K21B1 SERIES

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Ansnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

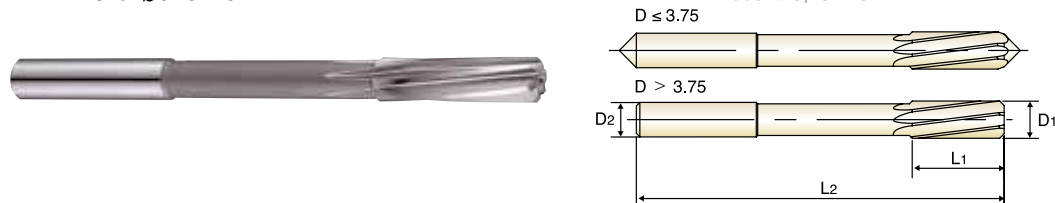

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Flute Length		Overall Length	
	D1		D2		L1		L2	
K21B100302	3.02		4		16		65	
K21B100303	3.03		4		16		65	
K21B100310	3.1		4		16		65	
K21B100320	3.2		4		16		65	
K21B100330	3.3		4		16		65	
K21B100340	3.4		4		18		70	
K21B100350	3.5		4		18		70	
K21B100360	3.6		4		18		70	
K21B100370	3.7		4		18		70	
K21B100380	3.8		4		19		75	
K21B100390	3.9		4		19		75	
K21B100397	3.97		4		19		75	
K21B100398	3.98		4		19		75	
K21B100399	3.99		4		19		75	
K21B100400	4.0		4		19		75	
K21B100401	4.01		4		19		75	
K21B100402	4.02		4		19		75	
K21B100403	4.03		4		19		75	
K21B100410	4.1		4		19		75	
K21B100420	4.2		4		19		75	
K21B100430	4.3		5		21		80	
K21B100440	4.4		5		21		80	
K21B100450	4.5		5		21		80	
K21B100460	4.6		5		21		80	

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	42	55		
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○	





K21B1 SERIES

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Ansnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

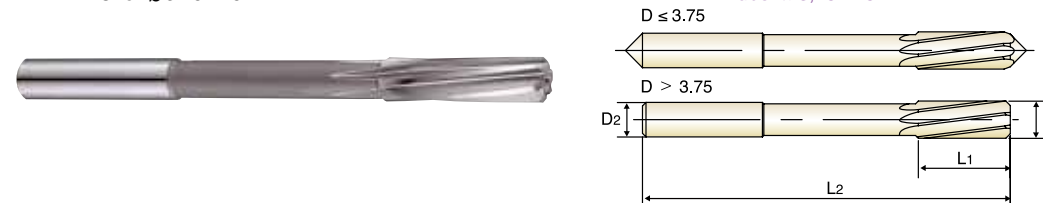

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Flute Length		Overall Length	
	D1		D2		L1		L2	
K21B100470	4.7		5		21		80	
K21B100480	4.8		5		23		86	
K21B100490	4.9		5		23		86	
K21B100497	4.97		5		23		86	
K21B100498	4.98		5		23		86	
K21B100499	4.99		5		23		86	
K21B100500	5.0		5		23		86	
K21B100501	5.01		5		23		86	
K21B100502	5.02		5		23		86	
K21B100503	5.03		5		23		86	
K21B100510	5.1		5		23		86	
K21B100520	5.2		5		23		86	
K21B100530	5.3		5		23		86	
K21B100540	5.4		6		26		93	
K21B100550	5.5		6		26		93	
K21B100560	5.6		6		26		93	
K21B100570	5.7		6		26		93	
K21B100580	5.8		6		26		93	
K21B100590	5.9		6		26		93	
K21B100597	5.97		6		26		93	
K21B100598	5.98		6		26		93	
K21B100599	5.99		6		26		93	
K21B100600	6.0		6		26		93	
K21B100601	6.01		6		28		101	

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	42	55		
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○	

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA




K21B1 SERIES

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Ansnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

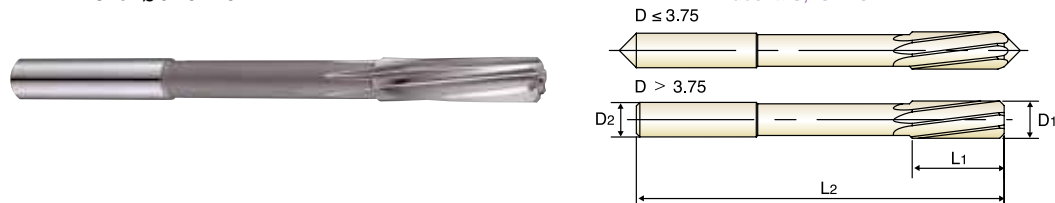

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Flute Length		Overall Length	
	D1		D2		L1		L2	
K21B100602	6.02		6		28		101	
K21B100603	6.03		6		28		101	
K21B100610	6.1		6		28		101	
K21B100620	6.2		6		28		101	
K21B100630	6.3		6		28		101	
K21B100640	6.4		6		28		101	
K21B100650	6.5		6		28		101	
K21B100660	6.6		6		28		101	
K21B100670	6.7		6		28		101	
K21B100680	6.8		8		31		109	
K21B100690	6.9		8		31		109	
K21B100700	7.0		8		31		109	
K21B100710	7.1		8		31		109	
K21B100720	7.2		8		31		109	
K21B100730	7.3		8		31		109	
K21B100740	7.4		8		31		109	
K21B100750	7.5		8		31		109	
K21B100760	7.6		8		33		117	
K21B100770	7.7		8		33		117	
K21B100780	7.8		8		33		117	
K21B100790	7.9		8		33		117	
K21B100797	7.97		8		33		117	
K21B100798	7.98		8		33		117	
K21B100799	7.99		8		33		117	

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○	





K21B1 SERIES

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

- HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø
- ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE
- ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI

- ▶ O.D. Tolerances
Whole-number Ø and 1/10 size : DIN 1420 for H7
1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
ganzahlige Ø und 1/10 Größen : DIN 1420 für H7
1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Ansnittwinkel - bis Ø3,75 : 15°
- über Ø3,75 : 45°

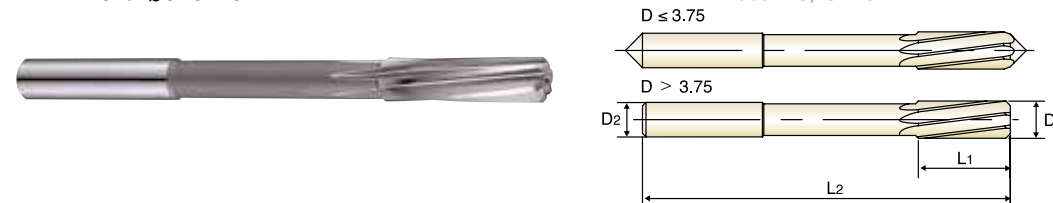

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Flute Length		Overall Length	
	D1		D2		L1		L2	
K21B100800	8.0		8		33		117	
K21B100801	8.01		8		33		117	
K21B100802	8.02		8		33		117	
K21B100803	8.03		8		33		117	
K21B100810	8.1		8		33		117	
K21B100820	8.2		8		33		117	
K21B100830	8.3		8		33		117	
K21B100840	8.4		8		33		117	
K21B100850	8.5		8		33		117	
K21B100860	8.6		10		36		125	
K21B100870	8.7		10		36		125	
K21B100880	8.8		10		36		125	
K21B100890	8.9		10		36		125	
K21B100900	9.0		10		36		125	
K21B100901	9.01		10		36		125	
K21B100902	9.02		10		36		125	
K21B100903	9.03		10		36		125	
K21B100910	9.1		10		36		125	
K21B100920	9.2		10		36		125	
K21B100930	9.3		10		36		125	
K21B100940	9.4		10		36		125	
K21B100950	9.5		10		36		125	
K21B100960	9.6		10		38		133	
K21B100970	9.7		10		38		133	

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	



ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○	

HSS-E, NC MACHINE REAMERS WITH WHOLE-NUMBER SHANK Ø

● **HSS-E, NC-MASCHINENREIBAHLEN mit GERADZÄHLIGEN SCHAFT Ø**
 ○ **ALÉSOIRS HSS-E MACHINE CN AVEC DIFFÉRENTES TOLÉRANCES DE QUEUE**
 ○ **ALESATORI A MACCHINA IN HSS-E CON GAMMA Ø NOMINALI**

- ▶ O.D. Tolerances
 Whole-number Ø and 1/10 size : DIN 1420 for H7
 1/100 size : from Ø2.01 to Ø5.03 : +0.004/-0.000mm
 from Ø5.97 to Ø12.03 : +0.005/-0.000mm
- ▶ Shank Diameter Tolerances : h6
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle - Up to Ø3.75 : 15°
 - Over Ø3.75 : 45°

- ▶ Ø Toleranzen:
 ganzzahlige Ø und 1/10 Größen : DIN 1420 für H7
 1/100 Größen : ab Ø2,01 bis Ø5,03 : +0.004/-0.000mm
 von Ø5,97 bis Ø12,03 : +0.005/-0.000mm
- ▶ Schaft-Durchmesser Toleranzen : h6
- ▶ linksspiralig/ rechtsscheidend
- ▶ Ansnittwinkel - bis Ø3,75 : 15°
 - über Ø3,75 : 45°

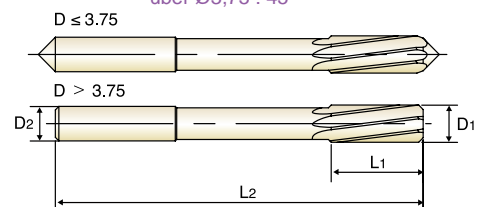

up to Ø3.75 over Ø3.75

Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Flute Length		Overall Length	
	D1		D2		L1		L2	
K21B100980	9.8		10		38		133	
K21B100990	9.9		10		38		133	
K21B100997	9.97		10		38		133	
K21B100998	9.98		10		38		133	
K21B100999	9.99		10		38		133	
K21B101000	10.0		10		38		133	
K21B101001	10.01		10		38		133	
K21B101002	10.02		10		38		133	
K21B101003	10.03		10		38		133	
K21B101100	11.0		10		41		142	
K21B101197	11.97		10		41		151	
K21B101198	11.98		10		41		151	
K21B101199	11.99		10		41		151	
K21B101200	12.0		10		44		151	
K21B101201	12.01		10		44		151	
K21B101202	12.02		10		44		151	
K21B101203	12.03		10		44		151	
K21B101300	13.0		10		44		151	
K21B101400	14.0		14		47		160	
K21B101500	15.0		14		50		162	
K21B101600	16.0		14		52		170	
K21B101700	17.0		14		54		175	
K21B101800	18.0		14		56		182	
K21B101900	19.0		16		58		189	
K21B102000	20.0		16		60		195	

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	13	25	28	32	10	29	32	38	10	11	12	13	14	15	16	17	18	19	20	
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	10	26	3	25	130	230	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	10	26	3	25	130	230	
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N						S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	33	34	35	400Rm	1050Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○	○

K4101, K4111 SERIES CARBIDE, NC MACHINE REAMERS

RPM = rev./min.
 FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)										
				2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0		
P	1	Non-alloy steel	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	2		17	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	3		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	4		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	5		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	6	Low alloy steel	17	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	7		14	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	8		14	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	9													
	10		High alloyed steel, and tool steel	13	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	
	11													
M	12	Stainless steel	8	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	13		7	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	14		6	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
K	15	Grey cast iron	20	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	16		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	17	Nodular cast iron	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	18		13	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	19	Malleable cast iron	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
	20		13	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.2-0.240	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40		
N	21	Aluminum-wrought alloy	30	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	22		30	0.1-0.130	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	23	Aluminum-cast, alloyed	30	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	24		25	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	25													
	26	Copper and Copper Alloys (Bronze / Brass)	25	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	27		22	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	28		23	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50		
	29	Non Metallic Materials												
	30													
S	31	Heat Resistant Super Alloys												
	32													
	33													
	34													
	35													
	36		Titanium Alloys											
	37													
H	38	Hardened steel												
	39													
	40		Chilled Cast Iron											
	41			Hardened Cast Iron										



RECOMMENDED CUTTING CONDITIONS
EMPHOHLNE SCHNEIDPARAMETER

K2101, K2111, K21B1,
K2102, K2112 SERIES

HSS-E, STRAIGHT & LH SPIRAL FLUTE
CHUCKING REAMERS
HSS-E, NC MACHINE REAMERS

RPM = rev./min.
FEED = mm/rev.

Table with columns: ISO, VDI 3323, Material Description, Vc (m/min), Feed (mm/rev) [2.0, 4.0, 6.0, 8.0, 10.0, 12.0, 14.0, 16.0, 20.0, 24.0, 28.0, 32.0, 36.0, 40.0, 45.0, 50.0]. Rows include categories P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloyed, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).



RECOMMENDED CUTTING CONDITIONS
EMPHOHLNE SCHNEIDPARAMETER

K2121 SERIES

HSS-E, CHUCKING REAMERS - QUICK SPIRAL

RPM = rev./min.
FEED = mm/rev.

Table with columns: ISO, VDI 3323, Material Description, Vc (m/min), Feed (mm/rev) [2.0, 4.0, 8.0, 10.0, 12.0, 14.0, 16.0, 20.0]. Rows include categories P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloyed, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



HSS & HSSCo8

HOLEMAKING

COUNTERSINKS

SENKER

- For Deburring, Chamfering and Countersinking
- Zum Entgraten, Anfasen und Senken

SELECTION GUIDE



SERIES	C1109 C3109	C1119 C3119
STANDARD	-	-
POINT ANGLE	90°	90°
SIZE MIN	D10.0	D10.0
SIZE MAX	D50.0	D50.0
PAGE	434	435

SURFACE TREATMENT Bright

HSS & HSSCo8 COUNTERSINKS

For Deburring, Chamfering and Countersinking



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.439

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	C1109 C3109	C1119 C3119	
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	
	2		About 0.45% C Annealed	190	13	○	○	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	
	4		About 0.75% C Annealed	270	28	○	○	
	5		About 0.75% C Quenched & Tempered	300	32	○	○	
	6	Low alloy steel	Annealed	180	10			
	7		Quenched & Tempered	275	29			
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11			Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	
	14		Austenitic	180	10	○	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	
	16		Pearlitic (Martensitic)	260	26	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	
	18		Pearlitic	250	25	○	○	
	19	Malleable cast iron	Ferritic	130		○	○	
	20		Pearlitic	230	21	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	
	22		Curable Hardened	100		○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	
	25		> 12% Si, Not Curable	130		○	○	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	
	27		CuZn, CuSnZn (Brass)	90		○	○	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100		○	○	
	29		Duroplastic, Fiber Reinforced Plastic					
	30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Cured	350	38			
	35	Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

C1136 C3136	C1139 C3139	C1132 C3132
DIN334C	DIN335C	-
60°	90°	120°
D6.3	D4.3	D8.0
D25.0	D31.0	D25.0
436	437	438

Bright




ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	C1136 C3136	C1139 C3139	C1132 C3132	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	
	4		About 0.75% C Annealed	270	28	○	○	○	
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	
	6	Low alloy steel	Annealed	180	10				
	7		Quenched & Tempered	275	29				
	8		Quenched & Tempered	300	32				
	9		Quenched & Tempered	350	38				
	10		High alloyed steel, and tool steel	Annealed	200	15			
	11			Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	
	14		Austenitic	180	10	○	○	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	
	18		Pearlitic	250	25	○	○	○	
	19	Malleable cast iron	Ferritic	130		○	○	○	
	20		Pearlitic	230	21	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	◎	
	22		Curable Hardened	100		○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	○	
	25		> 12% Si, Not Curable	130		○	○	○	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	
	27		CuZn, CuSnZn (Brass)	90		○	○	○	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100		○	○	○	
	29		Duroplastic, Fiber Reinforced Plastic						
	30	Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15				
	32		Cured	280	30				
	33		Annealed	250	25				
	34		Cured	350	38				
	35	Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm					
	37		Alpha + Beta Alloys Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55				
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42				
	41	Hardened Cast Iron	Hardened	550	55				

HSS & HSSCo8, DEBURRING TOOL with HOLE

- HSS, QUERLOCHSENKER
- FRAISE HSS À ÉBAVURER À TROU
- SVASATORI CON FORO - HSS

- ▶ For light metals and plastics.
- ▶ For deburring and small chamfers.
- ▶ Best surface finish.
- ▶ Works without vibrations.

- ▶ Für Leichtmetall und Plastik
- ▶ Zum Entgraten und Abfasen
- ▶ Bestes Oberflächenfinish
- ▶ Arbeitet ohne Vibration

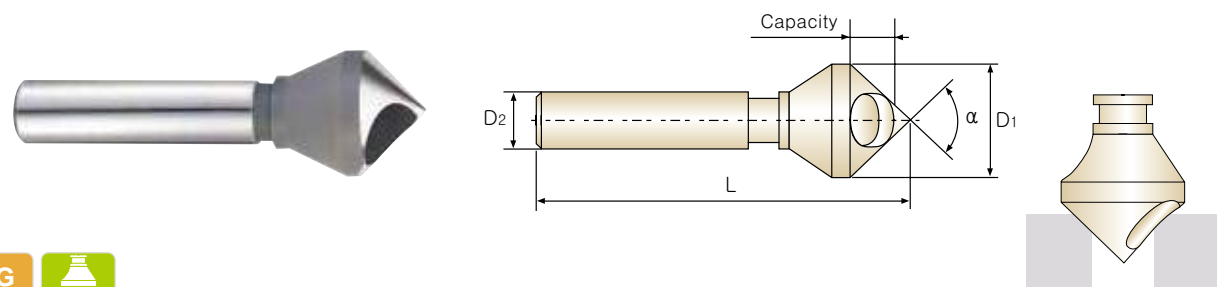

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1109100	C3109100	90°	10.0	6	45	2 - 5
C1109150	C3109150	90°	15.0	8	55	6 - 14
C1109200	C3109200	90°	20.0	10	65	8 - 18
C1109250	C3109250	90°	25.0	12	78	10 - 23
C1109300	C3109300	90°	30.0	12	88	12 - 28
C1109350	C3109350	90°	35.0	16	110	14 - 33
C1109400	C3109400	90°	40.0	16	115	16 - 38
C1109450	C3109450	90°	45.0	16	120	18 - 43
C1109500	C3109500	90°	50.0	16	130	20 - 48

▶ TiN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
+0.3/-0	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

HSS & HSSCo8, SINGLE FLUTE CHAMFERING CUTTERS

- HSS, EINSCHNEIDEN KEGELSENKER
- FRAISE HSS À CHANFREINER 1 DENT
- SVASATORI MONOTAGLIENTE - HSS

- ▶ For wood and hard plastics.
- ▶ Can drill in sheet materials.
- ▶ Easy to resharpen.
- ▶ Works without vibrations.

- ▶ Für Holz und Hartplastik
- ▶ Kann in Bleche bohren
- ▶ Leicht nachzuschärfen
- ▶ Arbeitet ohne Vibration

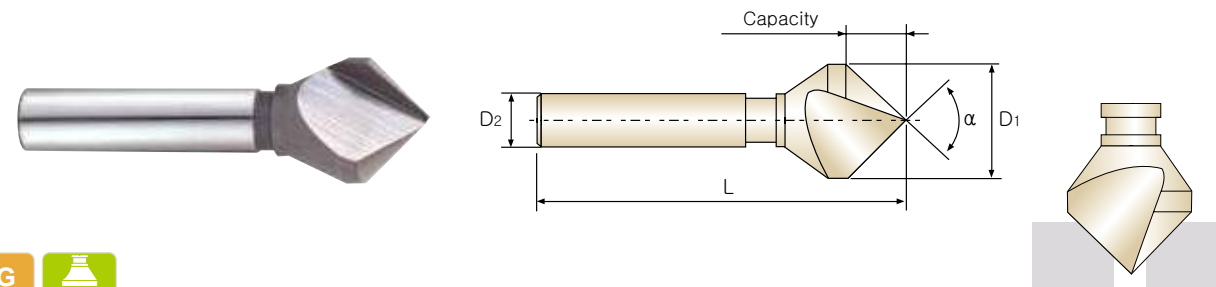

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1119100	C3119100	90°	10.0	6	45	1 - 10
C1119150	C3119150	90°	15.0	8	55	2 - 15
C1119200	C3119200	90°	20.0	10	65	2 - 20
C1119250	C3119250	90°	25.0	12	78	3 - 25
C1119300	C3119300	90°	30.0	12	88	3 - 30
C1119350	C3119350	90°	35.0	16	110	4 - 35
C1119400	C3119400	90°	40.0	16	115	5 - 40
C1119450	C3119450	90°	45.0	16	120	10 - 45
C1119500	C3119500	90°	50.0	16	130	12 - 50

▶ TiN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
+0.3/-0	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



C1136 SERIES


C3136 SERIES

HSS & HSSCo8, THREE FLUTE COUNTERSINKS (60°)

- HSS, DREISCHNEIDEN KEGELSENKER (60°)
- FRAISE HSS À CHANFREINER 3 DENTS (60°)
- SVASATORI A TRE TAGLIENTI - HSS (60°)

- ▶ Self-centering(3 flutes)
- ▶ For deburring, chamfering and countersinking
- ▶ Hand using
- ▶ Longitudinal chamfers and contouring
- ▶ Works without vibrations

- ▶ Selbstzentrierend
- ▶ Besonders geeignet zum 90° Ansenken für Senkkopfschrauben
- ▶ Manueller Einsatz möglich
- ▶ Zum Entgraten von Längs- und Profilkanten
- ▶ Arbeitet ohne Vibration

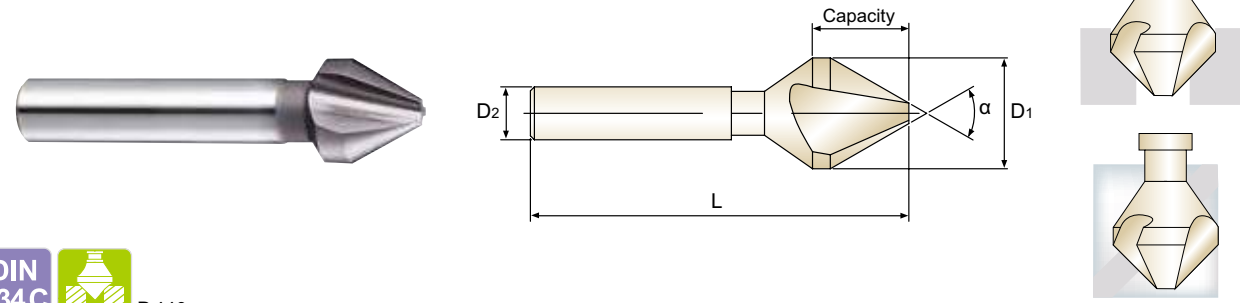

DIN 334 C P.440

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1136063	C3136063	60°	6.3	5	45	1.6~6.3
C1136080	C3136080	60°	8.0	6	50	2.0~8.0
C1136100	C3136100	60°	10.0	6	50	2.5~10.0
C1136125	C3136125	60°	12.5	8	56	3.2~12.5
C1136160	C3136160	60°	16.0	10	63	4.0~16.0
C1136200	C3136200	60°	20.0	10	67	5.0~20.0
C1136250	C3136250	60°	25.0	10	71	6.3~25.0

▶ TiN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
±0.05	h9	+0/-1

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



C1139 SERIES


C3139 SERIES

HSS & HSSCo8, THREE FLUTE COUNTERSINKS (90°)

- HSS, DREISCHNEIDEN KEGELSENKER (90°)
- FRAISE HSS À CHANFREINER 3 DENTS (90°)
- SVASATORI A TRE TAGLIENTI - HSS (90°)

- ▶ Self-centering(3 flutes).
- ▶ Designed for 90°capscrews countersinking.
- ▶ Hand using.
- ▶ Longitudinal chamfers and contouring.
- ▶ Works without vibrations

- ▶ Selbstzentrierend
- ▶ Besonders geeignet zum 90° Ansenken für Senkkopfschrauben
- ▶ Manueller Einsatz möglich
- ▶ Zum Entgraten von Längs- und Profilkanten
- ▶ Arbeitet ohne Vibration

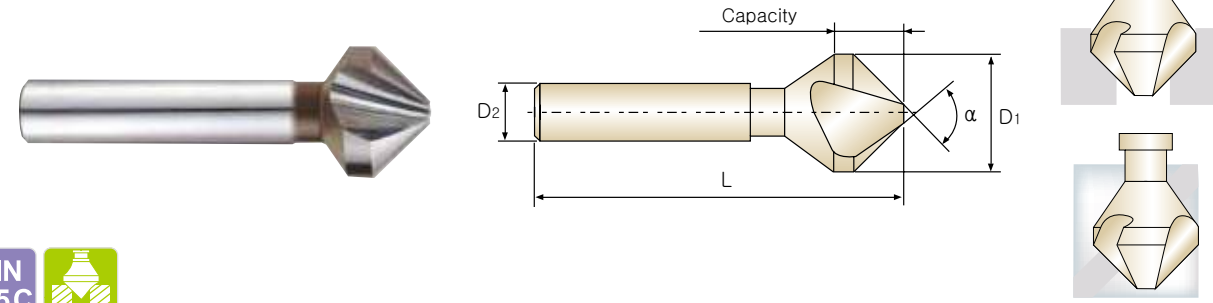

DIN 335 C P.440

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1139043	C3139043	90°	4.3	4	40	1.3 - 4.3
C1139050	C3139050	90°	5.0	4	40	1.5 - 5.0
C1139060	C3139060	90°	6.0	5	45	1.5 - 6.0
C1139063	C3139063	90°	6.3	5	45	1.5 - 6.3
C1139070	C3139070	90°	7.0	6	50	1.8 - 7.0
C1139080	C3139080	90°	8.0	6	50	2.0 - 8.0
C1139083	C3139083	90°	8.3	6	50	2.0 - 8.3
C1139100	C3139100	90°	10.0	6	50	2.5 - 10.0
C1139104	C3139104	90°	10.4	6	50	2.5 - 10.4
C1139115	C3139115	90°	11.5	8	56	2.8 - 11.5
C1139124	C3139124	90°	12.4	8	56	2.8 - 12.4
C1139150	C3139150	90°	15.0	10	60	3.2 - 15.0
C1139165	C3139165	90°	16.5	10	60	3.2 - 16.5
C1139190	C3139190	90°	19.0	10	63	3.5 - 19.0
C1139205	C3139205	90°	20.5	10	63	3.5 - 20.5
C1139230	C3139230	90°	23.0	10	67	3.8 - 23.0
C1139250	C3139250	90°	25.0	10	67	3.8 - 25.0
C1139300	C3139300	90°	30.0	12	71	4.2 - 30.0
C1139310	C3139310	90°	31.0	12	71	4.2 - 31.0

▶ TiN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
±0.05	h9	+0/-1

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	◎	○	○	○	○	○



ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

HSS & HSSCo8, THREE FLUTE COUNTERSINKS (120°)

- HSS, DREISCHNEIDEN KEGELSENKER (120°)
- FRAISE HSS À CHANFREINER 3 DENTS (120°)
- SVASATORI A TRE TAGLIENTI - HSS (120°)

- ▶ Self-centering(3 flutes)
- ▶ For deburring, chamfering and countersinking
- ▶ Hand using
- ▶ Longitudinal chamfers and contouring
- ▶ Works without vibrations

- ▶ Selbstzentrierend
- ▶ Zum Entgraten, Abfasen und Senkkopfschrauben
- ▶ Manueller Einsatz möglich
- ▶ Zum Entgraten von Längs- und Profilkanten
- ▶ Arbeitet ohne Vibration

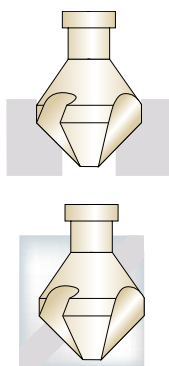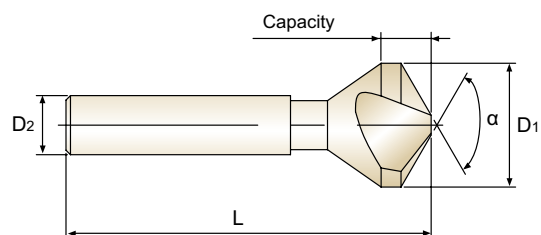

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1132080	C3132080	120°	8.0	6	49	2.0~8.0
C1132125	C3132125	120°	12.5	8	54	2.8~12.5
C1132160	C3132160	120°	16.0	10	57	3.2~16.0
C1132200	C3132200	120°	20.0	10	59	3.5~20.0
C1132250	C3132250	120°	25.0	10	65	3.8~25.0

▶ TIN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
±0.05	h9	+0/-1

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N				S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**C1109, C3109,
C1119, C3119** SERIES

**DEBURRING TOOL with HOLE
1 FLUTE CHAMFERING CUTTERS**

RPM = rev./min.
FEED = mm/rev.


ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)								
				10.0	15.0	20.0	25.0	30.0	40.0	50.0		
P	1	Non-alloy steel	40	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	2		40	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30		
	3		25	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27		
	4		18	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20		
	5		18	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20		
	6	Low alloy steel										
	7											
	8											
	9											
	10		High alloyed steel, and tool steel									
	11											
M	12	Stainless steel	8	0.05-0.07	0.07-0.09	0.07-0.09	0.09-0.11	0.09-0.11	0.11-0.14	0.11-0.14		
	13		7	0.05-0.07	0.07-0.09	0.07-0.09	0.09-0.11	0.09-0.11	0.11-0.14	0.11-0.14		
	14		6	0.05-0.07	0.07-0.09	0.07-0.09	0.09-0.11	0.09-0.11	0.11-0.14	0.11-0.14		
K	15	Grey cast iron	28	0.13-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.34		
	16		24	0.12-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33		
	17	Nodular cast iron	24	0.13-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.34		
	18		20	0.12-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33		
	19		24	0.13-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.34		
	20	Malleable cast iron	20	0.12-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33		
N	21	Aluminum-wrought alloy	56	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36		
	22		56	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36		
	23	Aluminum-cast, alloyed	54	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36		
	24		52	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36		
	25		50	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36		
	26		38	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37		
	27	Copper and Copper Alloys (Bronze / Brass)	35	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37		
	28		25	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36		
	29	Non Metallic Materials										
	30											
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35											
	36											
	37											
H	38	Hardened steel										
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

C1136, C3136, C1139, C3139, C1132, C3132 SERIES

3 FLUTE COUNTERSINKS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)							
				5.0	10.0	15.0	20.0	25.0	30.0	40.0	50.0
P	1	Non-alloy steel	20	0.12-0.16	0.16-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33	0.33-0.37	0.37-0.41
	2		20	0.12-0.16	0.16-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33	0.33-0.37	0.37-0.41
	3		13	0.10-0.14	0.14-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.39
	4		10	0.06-0.10	0.10-0.14	0.14-0.17	0.17-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35
	5		10	0.06-0.10	0.10-0.14	0.14-0.17	0.17-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35
	6	Low alloy steel									
	7										
	8										
	9										
	10		High alloyed steel, and tool steel								
	11										
M	12	Stainless steel	6	0.06-0.08	0.06-0.08	0.08-0.10	0.08-0.10	0.10-0.12	0.10-0.12	0.12-0.15	0.12-0.15
	13		5	0.06-0.08	0.06-0.08	0.08-0.10	0.08-0.10	0.10-0.12	0.10-0.12	0.12-0.15	0.12-0.15
	14		4	0.06-0.08	0.06-0.08	0.08-0.10	0.08-0.10	0.10-0.12	0.10-0.12	0.12-0.15	0.12-0.15
K	15	Grey cast iron	22	0.09-0.11	0.11-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32
	16		17	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31
	17	Nodular cast iron	17	0.09-0.11	0.11-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32
	18		15	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31
	19		17	0.09-0.11	0.11-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32
20	Malleable cast iron	15	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	
N	21	Aluminum-wrought alloy	42	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	22		42	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	23	Aluminum-cast, alloyed	39	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	24		37	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	25		35	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	26	Copper and Copper Alloys (Bronze / Brass)	28	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	27		25	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	28	Non Metallic Materials	15	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	29										
	30										
S	31	Heat Resistant Super Alloys									
	32										
	33										
	34										
	35										
	36	Titanium Alloys									
	37										
H	38	Hardened steel									
	39										
	40		Chilled Cast Iron								
41	Hardened Cast Iron										

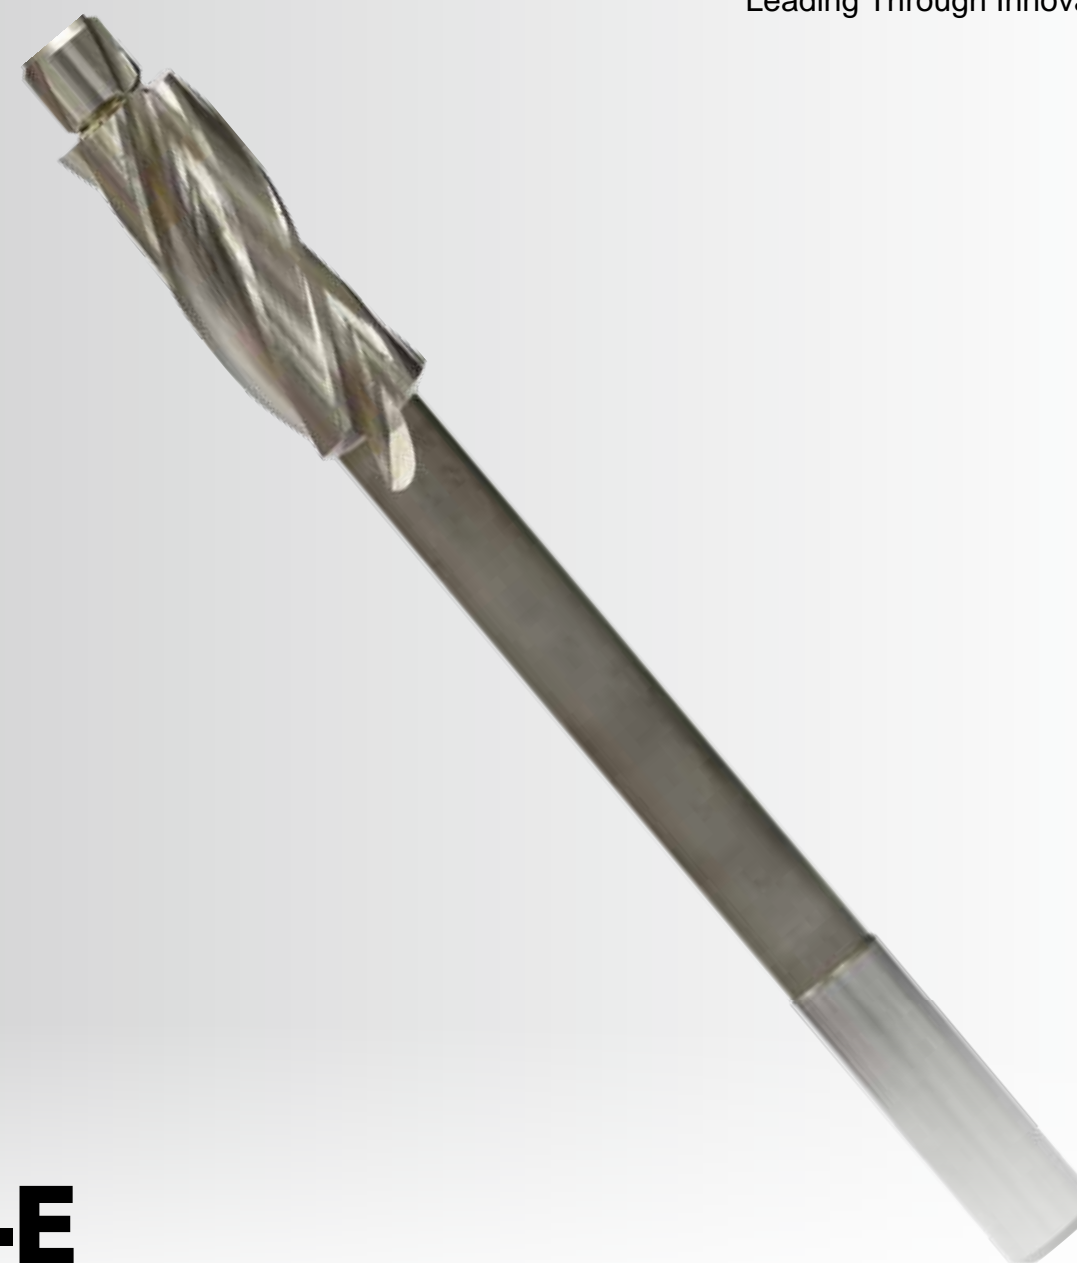

HSS-E

COUNTERBORES
FLACHSENKER

- For Machining Screw Head Seats
- Zur Herstellung von Schraubenkopfsenkungen

SELECTION GUIDE



SERIES	EL950		
TYPE	MEDIUM	FINE	BEOFRE THREADING
PILOT DIA.	3.4~14.0	3.2~13.0	2.5~10.2
CUTTER DIA.	6.0~20.0		
PAGE	443		

SURFACE TREATMENT Bright

HSS-E COUNTERBORES

For Machining Screw Head Seats



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.445

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc		
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	
	2		About 0.45% C Annealed	190	13	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	
	4		About 0.75% C Annealed	270	28	◎	
	5		About 0.75% C Quenched & Tempered	300	32	◎	
	6	Low alloy steel	Annealed	180	10	◎	
	7		Quenched & Tempered	275	29	◎	
	8		Quenched & Tempered	300	32	◎	
	9		Quenched & Tempered	350	38	○	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎
	11			Quenched & Tempered	325	35	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		
	13		Martensitic Quenched & Tempered	240	23		
	14	Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10		
	16		Pearlitic (Martensitic)	260	26		
	17	Nodular cast iron	Ferritic	160	3		
	18		Pearlitic	250	25		
	19	Malleable cast iron	Ferritic	130			
	20		Pearlitic	230	21		
N	21	Aluminum-wrought alloy	Not Curable	60		○	
	22		Curable Hardened	100		○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	
	24		≤ 12% Si, Curable Hardened	90		○	
	25		> 12% Si, Not Curable	130			
	26		Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		
	27	Non Metallic Materials	CuZn, CuSnZn (Brass)	90			
	28		CuSn, lead-free copper and electrolytic copper	100			
	29		Duroplastic, Fiber Reinforced Plastic				
	30	Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Ni or Co Based Cured	350	38		
	35		Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
41	Hardened Cast Iron	Hardened	550	55			

YG COUNTERBORES

EL950 SERIES

HSS-E, 3 FLUTE COUNTERBORES for 180° CAPSCREW

● HSS-E, 3 SCHNEIDEN FLACHSENKER MIT FESTEM FÜHRUNGSPAPFEN
 ○ FRAISES À LAMER HSS-E 3 DENTS TÊTE DE VIS À 180°
 ○ LAMATORI A TRE TAGLIANTI IN HSS-E per sedi di viti a testa cilindrica a 180°

► The counterbores with solid pilot are designed for machining as fillister screw caps or ejector caps in molds.

► Die Flachsenker mit festem Führungspapfen dienen dem 180° Ansenken für Zylinderkopfschrauben und Auswerferstiften in Formen



HSS-E DIN 373 3 PLAIN P.445

MEDIUM Unit : mm

EDP No.	ITEM No.	Screw Size	Pilot Diameter D(e8)	Cutter Diameter D1(z9)	Shank Diameter D2(h9)	Overall Length L
EL950003	YG54M3-M	M3	3.4	6.0	5	71
EL950035	YG54M3.5-M	M3.5	3.9	6.5	5	71
EL950004	YG54M4-M	M4	4.5	8.0	5	71
EL950005	YG54M5-M	M5	5.5	10.0	8	80
EL950006	YG54M6-M	M6	6.6	11.0	8	80
EL950008	YG54M8-M	M8	9.0	15.0	12.5	100
EL950010	YG54M10-M	M10	11.0	18.0	12.5	100
EL950012	YG54M12-M	M12	14.0	20.0	12.5	100

FINE Unit : mm

EDP No.	ITEM No.	Screw Size	Pilot Diameter D(e8)	Cutter Diameter D1(z9)	Shank Diameter D2(h9)	Overall Length L
EL950901	YG54M3-F	M3	3.2	6.0	5	71
EL950902	YG54M3.5-F	M3.5	3.7	6.5	5	71
EL950903	YG54M4-F	M4	4.3	8.0	5	71
EL950904	YG54M5-F	M5	5.3	10.0	8	80
EL950905	YG54M6-F	M6	6.4	11.0	8	80
EL950906	YG54M8-F	M8	8.4	15.0	12.5	100
EL950907	YG54M10-F	M10	10.5	18.0	12.5	100
EL950908	YG54M12-F	M12	13.0	20.0	12.5	100

►NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M				K				
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	○								

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

HSS-E, 3 FLUTE COUNTERBORES for 180° CAPSCREW

- HSS-E, 3 SCHNEIDEN FLACHSENKER MIT FESTEM FÜHRUNGZAPFEN
- FRAISES À LAMER HSS-E 3 DENTS TÊTE DE VIS À 180°
- LAMATORI A TRE TAGLIANTI IN HSS-E per sedi di viti a testa cilindrica a 180°

► The counterbores with solid pilot are designed for machining as fillister screw caps or ejector caps in molds.

► Die Flachsenker mit festem Führungzapfen dienen dem 180° Ansenken für Zylinderkopfschrauben und Auswerferstiften in Formen



BEFORE THREADING

Unit : mm

EDP No.	ITEM No.	Screw Size	Pilot Diameter	Cutter Diameter	Shank Diameter	Overall Length
PLAIN	PLAIN		D(e8)	D1(z9)	D2(h9)	L
EL950909	YG54M3-T	M3	2.5	6.0	5	71
EL950910	YG54M3.5-T	M3.5	2.9	6.5	5	71
EL950911	YG54M4-T	M4	3.3	8.0	5	71
EL950912	YG54M5-T	M5	4.2	10.0	8	80
EL950913	YG54M6-T	M6	5.0	11.0	8	80
EL950914	YG54M8-T	M8	6.8	15.0	12.5	100
EL950915	YG54M10-T	M10	8.5	18.0	12.5	100
EL950916	YG54M12-T	M12	10.2	20.0	12.5	100

Tolerances according to DIN 7160 & 7161
Toleranzen nach DIN 7160 & 7161

	Nominal-Diameter in mm / Nennmaßbereich in mm				Nominal-Diameter in mm / Nennmaßbereich in mm			
	from 1 to 3 von 1 bis 3	over 3 to 6 über 3 bis 6	over 6 to 10 über 6 bis 10	over 10 to 18 über 10 bis 18	from 6 to 10 von 6 bis 10	over 10 to 14 über 10 bis 14	over 14 to 18 über 14 bis 18	over 18 to 24 über 18 bis 24
e8	- 14	- 20	- 25	- 32	+ 78	+ 93	+ 103	+ 125
h9	- 28	- 38	- 47	- 59	+ 42	+ 50	+ 60	+ 73

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


EL950 SERIES HSS-E, 3 FLUTE COUNTERBORES for 180° CAPSCREW

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Cutter Diameter (Ø)							
				6.0	6.5	8.0	10.0	11.0	15.0	18.0	20.0
P	1	Non-alloy steel	Vc	25	25	25	25	25	25	25	25
			fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13
			RPM	1326	1224	995	796	723	531	442	398
			FEED	322	297	242	258	234	172	167	150
			Vc	24	24	24	24	24	24	24	24
	2		fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13
			RPM	1273	1175	955	764	694	509	424	382
			FEED	309	286	232	248	225	165	160	144
			Vc	18	18	18	18	18	18	18	18
	3		fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13
			RPM	955	881	716	573	521	382	318	286
FEED		232	214	174	186	169	124	120	108		
Vc		18	18	18	18	18	18	18	18		
4	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	955	881	716	573	521	382	318	286		
	FEED	232	214	174	186	169	124	120	108		
	Vc	18	18	18	18	18	18	18	18		
5	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	955	881	716	573	521	382	318	286		
	FEED	232	214	174	186	169	124	120	108		
	Vc	24	24	24	24	24	24	24	24		
6	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	1273	1175	955	764	694	509	424	382		
	FEED	309	286	232	248	225	165	160	144		
	Vc	18	18	18	18	18	18	18	18		
7	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	955	881	716	573	521	382	318	286		
	FEED	232	214	174	186	169	124	120	108		
	Vc	18	18	18	18	18	18	18	18		
8	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	955	881	716	573	521	382	318	286		
	FEED	232	214	174	186	169	124	120	108		
	Vc	15	15	15	15	15	15	15	15		
9	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	796	735	597	477	434	318	265	239		
	FEED	193	178	145	155	141	103	100	90		
	Vc	24	24	24	24	24	24	24	24		
10	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	1273	1175	955	764	694	509	424	382		
	FEED	309	286	232	248	225	165	160	144		
	Vc	18	18	18	18	18	18	18	18		
11	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	955	881	716	573	521	382	318	286		
	FEED	232	214	174	186	169	124	120	108		
	Vc	30	30	30	30	30	30	30	30		
21	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	1592	1469	1194	955	868	637	531	477		
	FEED	382	353	286	315	286	210	207	186		
	Vc	30	30	30	30	30	30	30	30		
22	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	1592	1469	1194	955	868	637	531	477		
	FEED	382	353	286	315	286	210	207	186		
	Vc	20	20	20	20	20	20	20	20		
23	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	1061	979	796	637	579	424	354	318		
	FEED	255	235	191	210	191	140	138	124		
	Vc	20	20	20	20	20	20	20	20		
24	fz	0.08	0.08	0.08	0.11	0.11	0.11	0.13	0.13		
	RPM	1061	979	796	637	579	424	354	318		
	FEED	255	235	191	210	191	140	138	124		
	Vc	20	20	20	20	20	20	20	20		



Global Cutting Tool Leader **YG-1**

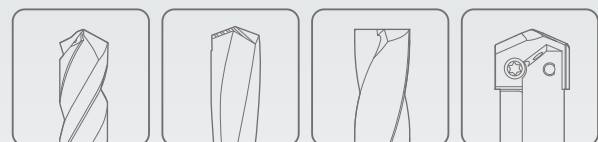

HOLEMAKING



Leading Through Innovation




DRILLS


TECHNICAL DATA

TECHNISCHE DATEN


1 TWIST DRILL WITH PARALLEL SHANK SPIRALBOHRER MIT ZYLINDERSCHAFT

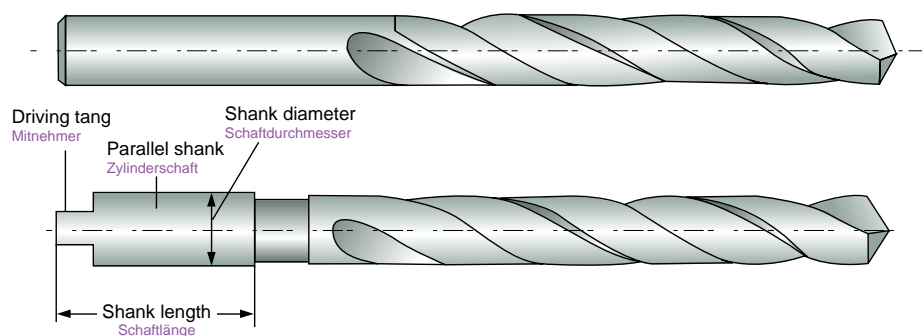

2 TWIST DRILL WITH TAPER SHANK SPIRALBOHRER MIT KEGELSCHAFT

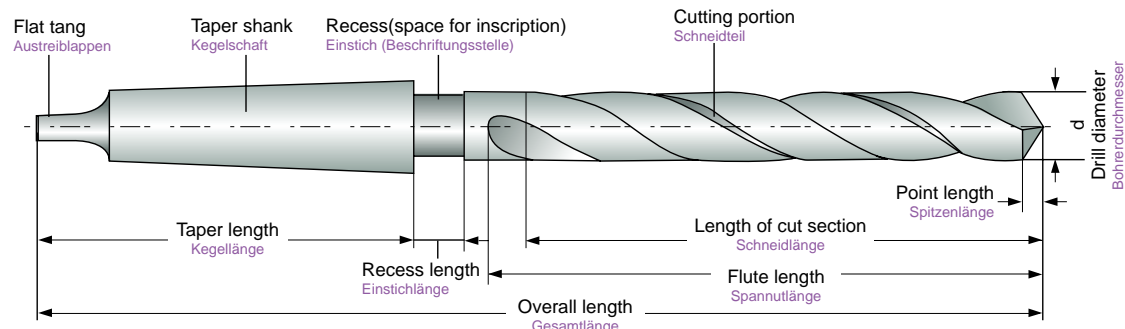


3 GENERAL DIMENSIONS OF MORSE TAPER SHANKS TOLERANZEN DES KEGELSCHAFTES

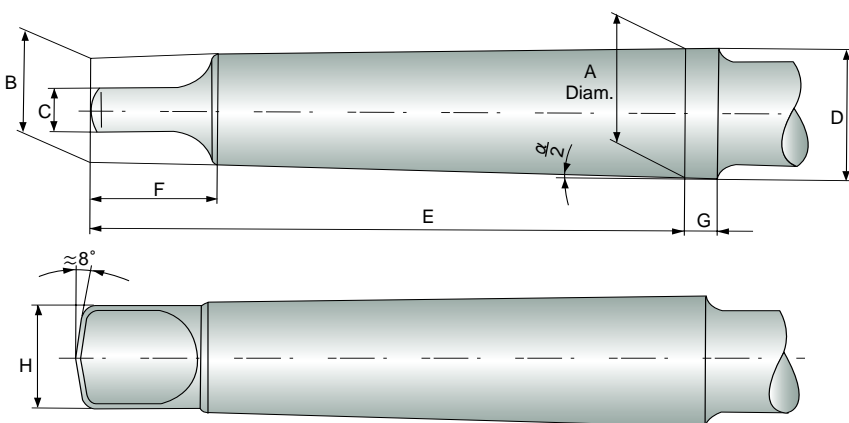

Morse Taper Shank Morsekegelschaft	A mm	B mm	C(h13) mm	D mm	E mm	F(max.) mm	G mm	H(max.) mm	$\alpha/2$
No.1	12.065	9	5.2	12.2	62	13.5	3.5	8.7	1°25'43"
No.2	17.780	14	6.3	18.0	75	16	5	13.5	1°25'50"
No.3	23.825	19.1	7.9	24.1	94	20	5	18.5	1°26'16"
No.4	31.267	25.2	11.9	31.6	117.5	24	6.5	24.5	1°29'15"
No.5	44.399	36.5	15.9	44.7	149.5	29	6.5	35.7	1°30'26"
No.6	63.348	52.4	19	63.8	210	40	8	51	1°29'36"

4 CUTTING PORTION SCHNEIDTEIL

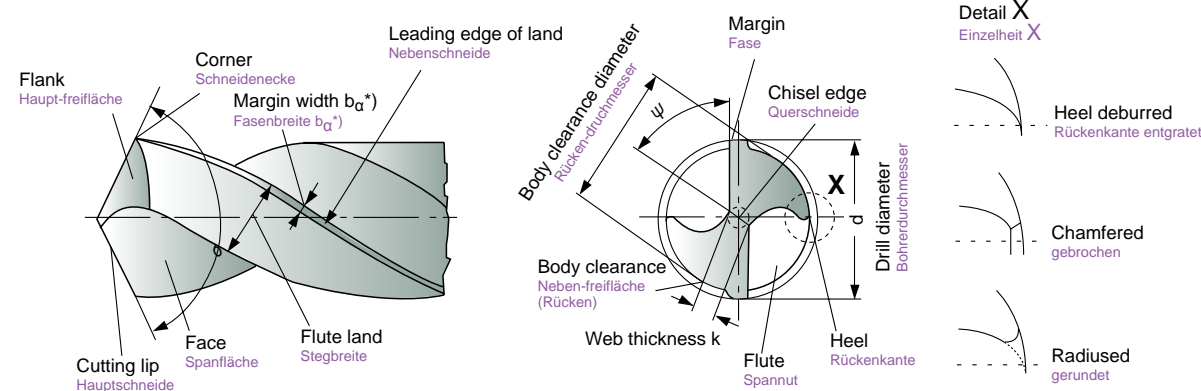


σ = Point angle (sigma) Spitzenwinkel (Sigma)

ψ = Chisel edge angle (psi) Querschneidenwinkel (Psi)

* In the context of cutting technology, land width b_g is the body clearance land width which is to be by b_{fan} , see DIN 6581.
Die Fasbreite b_g ist bei zerspannungstechnischen Betrachtungen die Fasbreite der Nebenfleißfläche und mit b_{fan} zu bezeichnen, siehe DIN 6581.

5 ANGLE AT THE CUTTING EDGES WINKEL AN DEN SCHNEIDEN

The corner has been adopted as the observed edge point.
Als betrachteter Schneideneckpunkt ist die Schneidenebene gewählt.

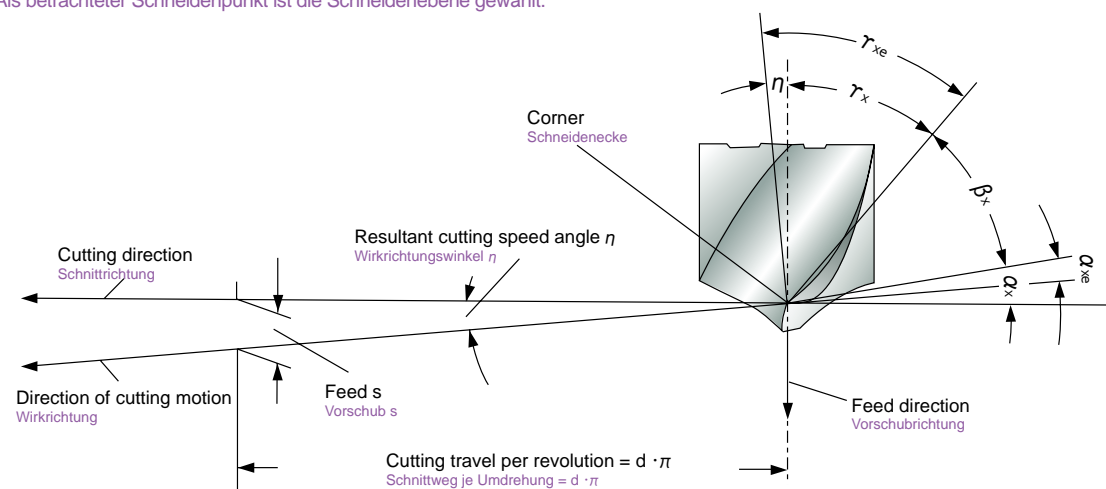

α_x = Side clearance angle (alpha) Seitenfreiwinkel (Alpa)

α_{xe} = Effective side clearance angle Wirk-Seitenfreiwin

β_x = Side wedge angle (beta) Seitenkeilwinkel (Beta)

γ_x = Front rake angle (gamma) Seitenspanwinkel (Gamma)

γ_{xe} = Working front rake angle Wirk-Seitenspanwinkel

η = Resultant cutting speed angle (eta) Wirkrichtungswinkel (Eta)

Clearance angle α , wedge angle β and rake angle γ are measured in the tool orthogonal plane. For details, see DIN 6581, definitions of metal-cutting technology; geometry at the tool edge.

Freiwinkel α , keilwinkel β und Spanwinkel γ werden in der keilmittelebene gemessen.
Einzelheiten siehe DIN 6581, Begriffe der Zerspanntechnik; Geometrie am Schneidkeil des Werkzeuges.

6 WEB THICKNESS K KERNDICKE K

Test values : The web thickness according to Fig. 1 shall not be less than the minimum value k_{min} indicated in Fig. 2.

Prüfwerte : Die kerndicke nach Bild 1 soll den Bild 2 angegebenen Mindestwert k_{min} nicht unterschreiten.

Test point : At the point of the drill. **Prüfstelle :** An der Bohrer Spitze

Testing equipment : Slide gauge with measuring points. **Prüfmittel :** Meßschieber (Schieblehre) mit Messerspitzen




Figure 1. Web thickness k
Bild 1. kerndicke k

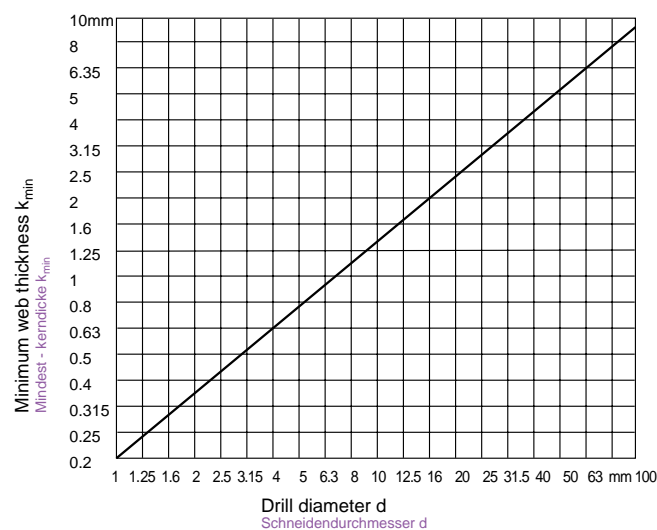


Figure 2. Web thickness k_{min}
Bild 2. Kerndicke k_{min}

7 MARGIN WIDTH b_α FASENBREITE b_α

Test values : The land width as in Fig. 3 shall lie within the limiting values indicated in Fig. 4.

Prüfwerte : Die Fasenbreite nach Bild 3 soll im Bereich der Grenzwerte liegen, die im Bild 4 angegeben sind.

Test point : 5mm behind the corner **Prüfstelle :** 5mm hinter der Schneidenecke

Testing equipment : Slide gauge **Prüfmittel :** Meßschieber

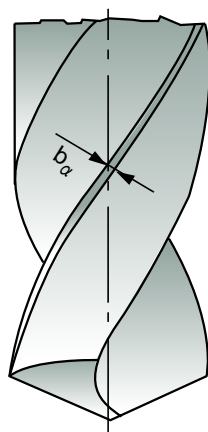


Figure 3. Margin width b_α
Bild 3. Fasenbreite b_α

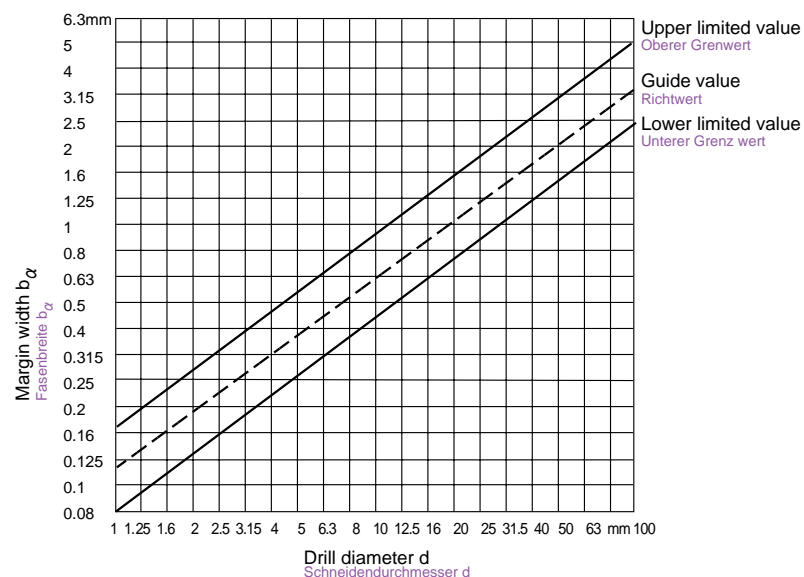


Figure 4. Margin width b_α
Bild 4. Fasenbreite b_α

8 ANGLE ON TWIST DRILLS WINKEL AN SPIRALBOHRERN

(1) Side rake angle γ_f (Helix angle)

Seitenspanwinkel (Spiralwinkel) γ_f

Recommended test value : Recommended ranges depending on the tool types N,H and W according to DIN 1836 and the diameter of the drill included in Fig. 5.

Empfohlene Prüfwerte : Empfohlene Bereiche in Abhängigkeit der Werkzeugtypen N, H und W nach DIN 1836 und des Schneidendurchmessers sind in Bild 5.

Test point : At the corner, see Fig. 6.

Prüfstelle : An der Schneidenecke, siehe Bild 6

Testing equipment : According to VDI Guideline 3331 Part 1, Section Margin width b_α

Prüfmittel : Nach der VDI-Richtlinie 3331 Blatt 1, Abschnitt Fasenbreite b_α

Note : The side rake angle γ_f is measured in place of the orthogonal rake angle γ_0 found in the wedge measuring plane (see DIN 6581), as this changes along the cutting edge (becoming smaller towards the point of the drill).

Anmerkung : Der Seitenspanwinkel γ_f wird an Stelle des in der Keilmeßebeine befindlichen Orthogonal-Spanwinkels γ_0 (Siehe DIN 6581) gemessen, da sich dieser entlang der Hauptschneide verändert (er wird zur Bohrer Spitze hin kleiner)

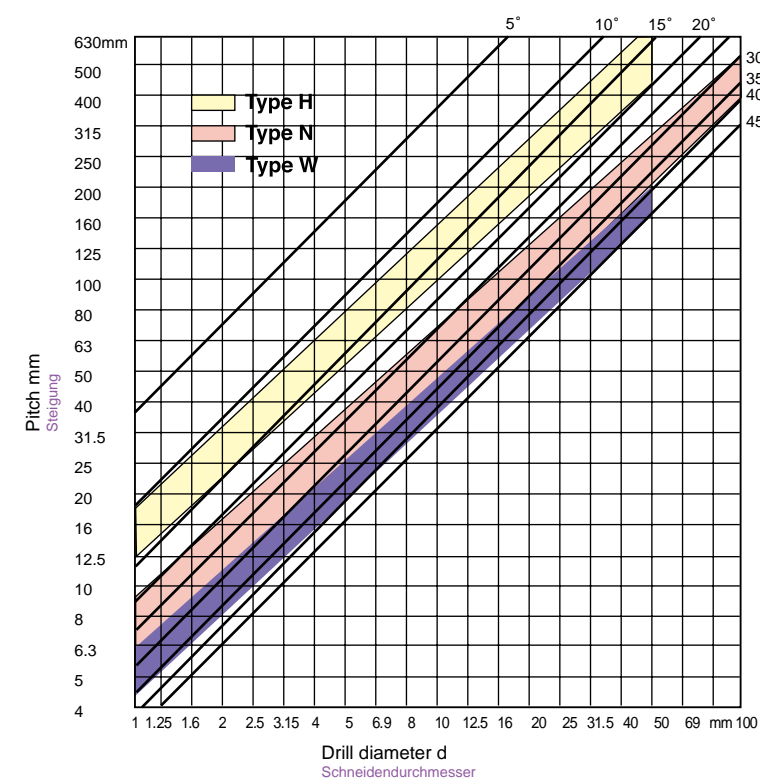


Figure 6. Side rake angle γ_f
Bild 6. Seitenspanwinkel γ_f




Figure 5. Side rake angle γ_f
Bild 5. Seitenspanwinkel γ_f

(2) Point angle σ

Spitzenwinkel σ

Test value : Usual execution for tool types N and H : $\sigma=118^\circ$,
for tool type W : $\sigma=130^\circ$

Prüfwerte : Regelausführung bei Werkzeugtyp N und H : $\sigma=118^\circ$
bei Werkzeugtyp W : $\sigma=130^\circ$

Test point : At the cutting, see Fig. 7.

Prüfstelle : An den Hauptschneiden, siehe Bild 7.

Testing equipment : According to VDI Guideline 3331 Part 1,
Section Margin width b_α .

Prüfmittel : Nach der VDI-Richtlinie 3331 Blatt 1, Abschnitt Fasenbreite b_α .




Figure 7. Point angle σ
Bild 7. Spitzenwinkel σ



RESHARPENING TWIST DRILLS NACHSCHLEIFEN VON SPIRALBOHRERN

(1) Drills are worn off irregularly. It should be sharpened prior to developing into excessive wear.

Unregelmäßiger Verschleiß von Bohrern. Bohrer soll vor übermäßigem Verschleiß nachgeschliffen werden.

(2) Resharpener (Nachschleifen)

- Grind the correct point angle to suit your application.(figure 8)
Den für Ihre Anwendung passenden korrekten Spitzenwinkel schleifen (Bild 8)
- Check that both cutting lips have the same angle. On a 130° point, each lip should be 65° toward the axis. The point must be on center, i.e., the chisel edge must produce cutting lips of equal length.(figure 8)
Überprüfen, dass beide Hauptschneiden den gleichen Winkel haben. Bei einem 130° Spitzenwinkel, sollte jede Hauptschneide 65° haben (Bild 8)
- Grind Primary relief and Secondary clearance.(figure 9)
Primärer Hinterschliff und Sekundärer Freiwinkel (Bild 9)
- Grind web thinning. (figure 10)
Den ausgespitzten Kern schleifen (Bild 10)

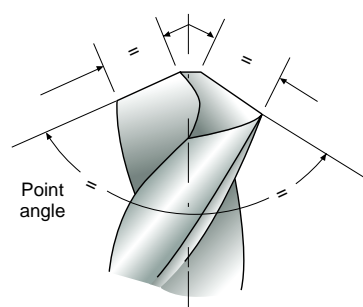


Figure 8
Bild 8




Figure 9
Bild 9




Figure 10
Bild 10



WEB THINNING KEGELMANTELSCHLIFF

(1) Without thinning

Normalanschliff


Suitable for drill of general purpose.

Thanks to thin web thickness, web thinning is not needed.
This without web thinning type is applied to design of drills for mild steels, alloy steels, cast iron, stainless steels, titanium, inconel, etc. and conventional cutting conditons.

Zum Bohren für allgemeine Zwecke.

Dank dünner Kerndicke, ist Kegelmantelschliff nicht nötig.

Geeignet für Stahl, Stahl-Legierungen, Gusseisen, Edelistahl, Tian, Inconel usw. und für konventionelle Schneidbedingungen

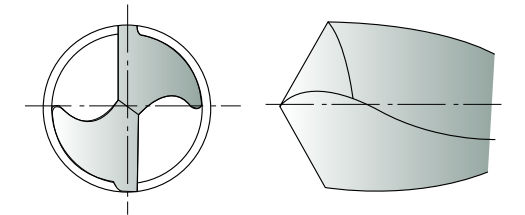

(2) Type C thinning (DIN1412 FORM C, SPLIT POINT)


DiN 1412 Form C kegelmantelschliff mit Kreuzanschliff

Because Split point enables good centering when drilling and breaks the chips, chip removals are easy.

Suitable for drill design in high hardened tough materials, i.e. heat treated steels, titanium alloys, stainless steels, incoroy inconel, nimonic, etc.

Da Kreuzanschliff gute Zentrierung und Spanbruch während des Bohrens ermöglicht, wird die Spanentfernung erleichtert.

Geeignet für zähe Werkstücke oder Werkstücke mit hoher Härte, z.B. hitzebehandelten Stahl, Titan-Legierungen, Edelistahl, Inconoy Inconel, Nimonic usw.

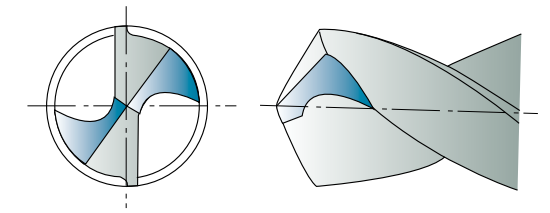


(3) Type R thinning (HELICAL THINNING)

Form R Kegelmantelschliff (Spiralanschliff)

Helical thinning ensures to frequent chip breaking and removal. The different direction force of cutting edges and helical thinning parts enable that chips curl, break and remove through the flutes. In addition, helical thinning makes the chip room up to center, remove the chisel and enables good centering

Häufiger Spanbruch und Spanentfernung durch Spiralanschliff, es wird ausreichend Raum für Späne geschaffen, und gute Zentrierung ist möglich.

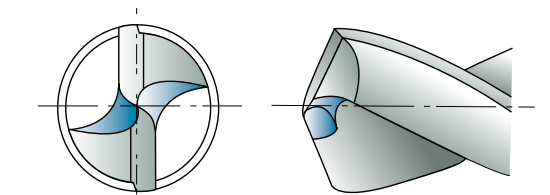

(4) Type A thinning (DIN1412 FORM A)


DiN 1412 Form A Kegelmantelschliff mit ausgespitzter Querschneide

A type thinnings makes thin chisel, good chip removal and favorable centering.

This type is the easiest type to grind the thinning. In narrow web and wide fluted drills, keeping of the rigidity and smooth chip removal are possible.

Diese Form hat eine dünne Querschneide, dadurch ist gute Spanentfernung und Zentrierung möglich.

Der Kegelmantelschliff ist bei dieser Form am einfachsten nachzuschleifen, Ein enger Kern und breite Schneiden erhalten die Stabilität.

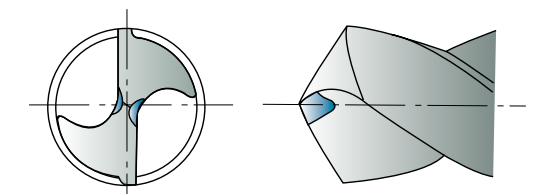

(5) Type B thinning (DIN1412 FORM B)


DIN 1412 Form B Kegelmantelanschliff mit ausgesetzter Querschneide

In case of work materials with low cutting resistance and good chip removal, i.e., cast iron, aluminum, plastic etc., B type thinning is suitable.

Especially when drills for high hardened steels are designed, this type is applied to decrease rake angle and avoid chipping of cutting lips.

Geeignet für Werkstücke mit geringem Schneidwiderstand und guter Spanentfernung, z.B. Gusseisen, Aluminium, Plastik usw.

Diese Form wird besonders dann angewendet, wenn der Bohrer für Stähle mit hoher Härte produziert wurde, da dadurch der Seitenspanwinkel verkleinert wird und Brüche an der Schneidkante vermieden werden.

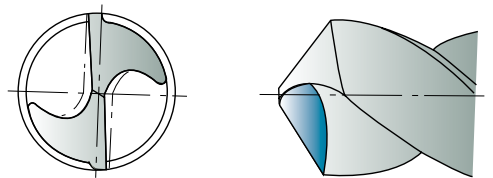

(6) Type D thinning (DIN1412 FORM D)


DIN 1412 Form D Kegelmantelanschliff mit ausgesetztem Kern

Grey cast iron thinning; bevelling of external edges strengthens the cutting edge.

Used for medium to high grey cast iron hardness and for abrasives.

GG-Anschliff; Fasen auf dem Steg verstärken die Schneidkante.

Geeignet für medium bis hohe Härte GG und für abrasive Materialien.

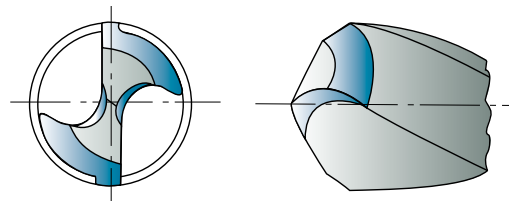


(7) Type E thinning (DIN1412 FORM E)

DIN 1412 Form E Zentrumschneide

Center drill bit thinning; ensures optimal center drilling and does not leave burrs in through holes.

As the bit and cutting edges are delicate, this bit should be used for drilling thin sheet metal.

Zentrisches Bohren, Niedrige Gratbildung, Geeignet zum Bohren von dünnen Blechen und Rohren.

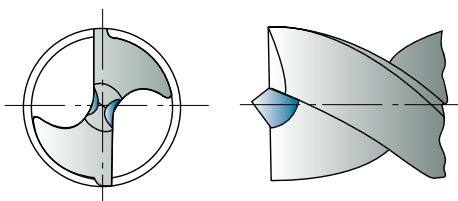

11 Surface Finishes for high speed steels Twist Drills Oberflächenbeschaffenheit von HSS-Spiralbohrern

(1) Bright Finish Helle Beschaffenheit

Drills with a bright finish are without surface treatment and ground condition.

Especially bright finished drills are used in machining of non ferrous materials.

Ohne Oberflächenbehandlung, geeignet zum Bearbeiten von Nichteisen Materialien.

(2) Coloring (Gold color) Farbe (Bernstein)

The coloring is a thin oxide layer formed on the tool surfaces. Dies ist eine dünne Oxidschicht.

This is often applied to cobalt high speed steels twist drills. Geeignet für Kobalt-HSS-Spiralbohrer.

(3) Steam Tempered (black oxide finish) Dampfoxydierte Ausführung

This is a black oxide layer 1-2µm formed on the tool surfaces.

Steam Tempered treated drill is the result of a steam tempering operation. Because the oxide layer retains some coolant on the tool surface, and aids chip flow, helps to dissipate heat, steam homo treated drills are recommended for ferrous applications.

Eine schwarze Oxidschicht 1-2µm.

Da die Oxidschicht Kühlmittleigenschaften auf der Werkzeugoberfläche beinhaltet und den Spanfluss verbessert und die Hitze verteilt, sind diese Bohrer für die Bearbeitung von Metal-Werkstücken empfohlen.

12 COATING BESCHICHTUNGEN

The use of coated cutting tools reduce production costs.

For example

- Avoidance of machine downtime due to premature tool wear.
- Higher cutting capabilities to reduce actual machining times.
- Reproducible tool life.
- Improvement of component surface quality.

Durch den Gebrauch von beschichteten Werkzeugen werden Produktionskosten reduziert, z.B.

- Vermeidung von Maschinen-Ausfallzeiten wegen frühzeitigem Verschleiß des Bohrers.
- Höhere Bohrleistung, dadurch Verminderung von Arbeitszeit.
- Längere Standzeit.
- Verbesserte Oberflächengüte des Werkstücks.

(1) TiN (Titanium Nitride) coating TiN (Titan-Nitrid) Beschichtung

Titanium Nitride gives the tool a higher performance in comparison to traditional non-coated drills.

TiN coating, with good all-around properties, is recommended for the general application, i.e., attack by abrasive, adhesive and chemical wear in equal proportions.

Bessere Leistung im Vergleich zu unbeschichteten Werkzeugen

TiN-Beschichtung wird für allgemeine Anwendungen empfohlen guten.

(2) TiCN (Titanium Carbon Nitride) coating TiCN (Titan karbon Nitrid) Beschichtung

TiCN coating should be employed when severe thermodynamic stress is expected, for example when drilling in high hardened steels or in mild steels with high speed and feed.

Diese Beschichtung soll bei extremen thermodynamischen Bedingungen verwendet werden, z.B. bei Bohren von Stählen mit hoher Härte und Stählen mit hoher Geschwindigkeit und Vorschub.

(3) TiAlN (Titanium Aluminium Nitride) coating TiAlN (Titan Aluminium Nitrid) Beschichtung

The addition of Aluminum to the Titanium Nitride produces an increase in hardness and an exceptional increase in resistance to oxidation at high temperature.


TiAlN coating is applied to drilling with severe thermal stress on cutting edges when continuous non-step feed, dry cutting or high speed cutting.

Der Zusatz von Aluminium zum Titan-Nitrid ermöglicht eine höhere Härte und einen auß erordentlich guten Widerstand gegen Oxidation und hohe Temperaturen.

Geeignet zum Bohren unter extremen thermischen Bedingungen auf der Hauptschneide bei kontinuierlichem Vorschub, Trockenschnitt oder Hochgeschwindigkeitsbohren.

(4) Properties of coating Beschichtungs-Eigenschaften

Properties	TiN	TiCN	TiAlN
Coating color Beschichtungsfarbe	gold - yellow	blue - grey	violet - grey
Hardness (Hv 0.05) härtegrad (Hv 0.05)	2300	3000	3000
Coating thickness (µm) Beschichtungsdicke (µm)	1~4	1~4	1~5
Max. working temperature (°C) Max. Arbeitstemperatur (°C)	600	400	800
Coefficient of friction against steels (dry) Reibungskoeffizient für stahl (trocken)	0.4	0.4	0.4

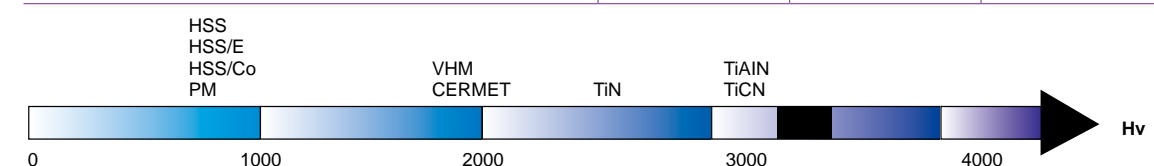

(5) Selection of coating *Verschiedene Beschichtungen*

Properties	TiAlN	TiCN, TiAlN
Unalloyed steels Unlegierter Stahl	TiCN, TiAlN	TiCN, TiAlN
Steels < 1000 N/mm² Stahls < 1000 N/mm ²	TiCN, TiAlN	TiCN, TiAlN
Steels > 1000 N/mm² Stahls > 1000 N/mm ²	TiCN, TiAlN	TiCN, TiAlN
Stainless steels Edelstähle	TiCN, TiAlN	TiCN, TiAlN
Cast iron Gusseisen	TiCN, TiAlN	TiAlN
Al-wrought alloys Al-Knetlegierungen	TiN	TiN
Al-cast alloys Al-Gusslegierungen	TiCN	TiCN
Copper (pure) Kupfer (pur)	CrN	CrN
Brass Messing	TiCN	TiCN
Bronze Bronze	TiCN	TiCN

13 DRILL SIZES BEFORE TAPPING
DURCHMESSER FÜR BOHRWERKZEUGE FÜR GEWINDEKERNLÖCHER
(1) Metric - ISO threads coarse pitch *Metrisch - ISO Gewinde, grobverzahnt*

Nominal diameter	Drill diameter	Nominal diameter	Drill diameter	Nominal diameter	Drill diameter	Nominal diameter	Drill diameter
		M3	2.5	M11	9.5	M30	26.5
M1	0.75	M3.5	2.9	M12	10.2	M33	29.5
M1.2	0.95	M4	3.3	M14	12.0	M36	32.0
M1.4	1.1	M5	4.2	M16	14.0	M39	35.0
M1.6	1.25	M6	5.0	M18	15.5	M42	37.5
M1.8	1.45	M7	6.0	M20	17.5	M45	40.5
M2	1.6	M8	6.8	M22	19.5	M48	43.0
M2.2	1.75	M9	7.8	M24	21.0	M52	47.0
M2.5	2.05	M10	8.5	M27	24.0	M56	50.5

(2) Metric ISO threads fine pitch
Metrisch - ISO Gewinde, feinverzahnt

Nominal diameter	Tap Pitch	Drill diameter	Nominal diameter	Tap Pitch	Drill diameter
2.5	0.35	2.15	7	0.75	6.2
3	0.35	2.65	8	0.75	7.2
3.5	0.35	3.15	8	1	7
4	0.5	3.5	9	0.75	8.2
4.5	0.5	4	9	1	8
5	0.5	4.5	10	0.75	9.2
5.5	0.5	5	10	1	9
6	0.75	5.2	10	1.25	8.8

Nominal diameter	Tap Pitch	Drill diameter	Nominal diameter	Tap Pitch	Drill diameter
11	0.75	10.2	30	1	29
11	1	10	30	1.5	28.5
12	1	11	30	2	28
12	1.25	10.8	30	3	27
12	1.5	10.5	32	1.5	30.5
14	1	13	32	2	30
14	1.25	12.8	33	1.5	31.5
14	1.5	12.5	33	2	31
15	1	14	33	3	30
15	1.5	13.5	35	1.5	33.5
16	1	15	36	1.5	34.5
16	1.5	14.5	36	2	34
17	1	16	36	3	33
17	1.5	15.5	38	1.5	36.5
18	1	17	39	1.5	37.5
18	1.5	16.5	39	2	37
18	2	16	39	3	36
20	1	19	40	1.5	38.5
20	1.5	18.5	40	2	38
20	2	18	40	3	37
22	1	21	42	1.5	40.5
22	1.5	20.5	42	2	40
22	2	20	42	3	39
24	1	23	45	1.5	43.5
24	1.5	22.5	45	2	43
24	2	22	45	3	42
25	1	24	48	1.5	46.5
25	1.5	23.5	48	2	46
25	2	23	48	3	45
26	1.5	24.5	50	1.5	48.5
27	1	26	50	2	48
27	1.5	25.5	50	3	47
27	2	25	52	1.5	50.5
28	1	27	52	2	50
28	1.5	26.5	52	3	49
28	2	26			

(3) WITHWORTH pipe threads (BSP)
WITHWORTH Rohrgewinde (BSP)

Nominal size	Drill diameter	Nominal size	Drill diameter
inches	mm	inches	mm
G1/8	8.8	G1-1/4	39.5
G1/4	11.8	G1-3/8	42.0
G3/8	15.25	G1-1/2	45.0
G1/2	19.0	G1-3/4	51.0
G5/8	21.0	G2	57.0
G3/4	24.5	G2-1/4	63.0
G7/8	28.25	G2-1/2	73.0
G1	30.75	G2-3/4	79.0
G1 1/8	35.5	G3	85.0

(4) American unified coarse threads Amerikanischer Standard, Grobverzahnung

UNC	Drill diameter		UNC	Drill diameter	
	inches	mm		inches	mm
No. 1	53	1.51	7/16	U	9.35
No. 2	50	1.78	1/2	27/64	10.71
No. 3	47	1.99	9/16	31/64	12.30
No. 4	43	2.26	5/8	17/32	13.49
No. 5	38	2.58	3/4	21/32	16.67
No. 6	36	2.71	7/8	49/64	19.44
No. 8	29	3.45	1	7/8	22.22
No. 10	25	3.8	1-1/8	63/64	25.00
No. 12	16	4.5	1-1/4	1-7/64	28.18
1/4	7	5.11	1-3/8	1-7/32	30.95
5/16	F	6.53	1-1/2	1-11/32	34.13
3/8	5/16	7.94			

(5) American unified fine threads Amerikanischer Standard, Feinverzahnung

NF	Drill diameter		NF	Drill diameter	
	inches	mm		inches	mm
No. 0	3/64	1.19	3/8	Q	8.43
No. 1	53	1.51	7/16	25/64	9.92
No. 2	50	1.78	1/2	29/64	11.51
No. 3	45	2.08	9/16	33/64	13.10
No. 4	42	2.37	5/8	37/64	14.86
No. 5	37	2.64	3/4	11/16	17.46
No. 6	33	2.87	7/8	13/16	20.64
No. 8	29	3.45	1	59/64	23.42
No. 10	21	4.04	1-1/8	1-3/64	26.59
No. 12	14	4.62	1-1/4	1-11/32	29.76
1/4	3	5.41	1-3/8	1-19/32	32.94
5/16	1	6.91	1-1/2	1-27/64	36.11


ISO TOLERANCE
ISO TOLERANZ

$\mu\text{m} = 1/1000\text{mm}$

Diameter (mm)	1 - 3 from to	3 - 6 over to	6 - 10 over to	10 - 18 over to	18 - 30 over to	30 - 50 over to
Tolerance range in μm / Toleranzwerte in μm						
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16
h7	0 - 10	0 - 12	0 - 15	0 - 18	0 - 21	0 - 25
h8	0 - 14	0 - 18	0 - 22	0 - 27	0 - 33	0 - 25
m7	+ 12 + 2	+ 16 + 4	+ 21 + 6	+ 25 + 7	+ 29 + 8	+ 34 + 9


TROUBLE SHOOTING IN DRILLING
PROBLEME UND ABHILFE



Occurrence of trouble	Cause of trouble	Countermeasures
Drill will not enter work Bohrer dringt nicht durch werkstück	1. Drill is dull. 2. Lip relief too small. 3. Too thick a web. 1. Bohrer ist stumpf 2. Hauptschneide ist zu klein 3. Kern ist zu dick	1. Grind lip relief sufficiently. 2. Grind web thinning. 3. Choose a drill with narrow web. 1. Schleifen der Hauptschneide 2. Kegeimantel schleifen 3. Bohrer mit engerem kern wählen
Margin chipping Fasenbruch	1. Oversized jig bushing. 1. Bohrbuchse ist zu ungleich.	1. Choose the suitable jig bushing for drill diameter 1. Den passenden Bohrbuchse wählen.
Cutting lip breaks Bruch der Hauptschneide	1. Lip relief too much. 2. Feed too heavy. 1. Zu große Entlastung der Hauptschneide 2. Vorschub zu stark	1. Grind lip relief sufficiently. 2. Decrease feed rate. 1. Schleifen der Hauptschneide 2. Vorschub verringern
Tang breaks Bruch der Austrieblappen am Kagelschaft	1. Imperfect fit between taper shank and socket. 2. Burred or Badly worn sockets. 1. Befestigung zwischen Morsekegel und Aufnahme ungenügend 2. Verschleiß der Aufnahme	1. Clean the dirt or chips in sockets. 2. Change the worn sockets to new ones. 1. Schmutz oder Späne in der Aufnahme entfernen 2. Aufnahme wechseln
Drill breaks in brass Bohrer bricht in Messing	1. Unsuitable drill 2. Flutes clogged with chips 1. Unpassender Bohrer 2. Schneiden durch Späne verstopft	1. Choose the suitable drill for work material. 1. Den passenden Bohrer wählen
Chipping of drill center Brüche auf der Querschneide	1. Lip relief too much. 2. Feed too heavy. 1. Zu große Entlastung der Hauptschneide 2. Vorschub zu stark	1. Grind lip relief sufficiently. 2. Decrease feed rate. 1. Schleifen der Hauptschneide 2. Vorschub verringern
Hole oversize Übergröße des Lochs	1. Unequal angle or length of cutting edges. 2. Loosen spindle. 1. Ungleicher Winkel oder Länge der Hauptschneiden 2. Lockere Spindel	1. Resharpener point, choose correct drills. 2. Tighten spindle sufficiently. 1. Nachschleifen der Bohrspitze, passenden Bohrer wählen 2. Spindel ausreichend befestigen
Outer corners broken down. Brüche in der Schneidenecke	1. Cutting speed too high. 2. Hard spots in work material. 3. Flutes clogged with chips. 4. Too wear of drills. 1. Schnittgeschwindigkeit zu hoch 2. Harte Flächen im Werkstück 3. Schneiden durch Späne verstopft 4. Verschleiß des Bohrers zu groß	1. Grind point to suit work material. 2. Decrease the feed rates. 3. Resharpener early before too wear. 1. Bohrspitze nachschleifen und ans Werkstück anpassen 2. Vorschub verringern 3. Nachschleifen vor zu groß em Verschleiß
Large chip of one flute and small chip of other flute Ungleiche Späne auf den Schneiden	1. Improperly ground point. 2. Only one lip doing all the cutting 1. Bohrspitze nicht richtig geschliffen 2. Nur eine Schneide bohrt	1. Properly grind point. 2. Grind point with same point angle and length of lip 3. Grind with small lip height. 1. Bohrspitze richtig schleifen 2. Bohrspitze mit dem gleichen Spitzenwinkel und Länge nachschleifen 3. Schleifen mit geringer Hauptschneidenhöhe
Hole rough Grobes Loch	1. Improperly ground point. 2. Unenough coolant supply 3. Too much feed. 4. Fixture not rigid. 1. Bohrspitze nicht richtig geschliffen 2. Ungenügende Kühlmittelzufuhr 3. Vorschub zu hoch 4. Befestigung nicht stabil	1. Properly grind point. 2. Supply coolant enough. 3. Decrease the feed rate. 4. Tighten the fixture or replace. 1. Bohrspitze richtig schleifen 2. Genügend Kühlmittel zuführen 3. Vorschub verringern 4. Befestigung stabilisieren oder erneuern

16 CHARACTERISTIC OF DREAM DRILLS MERKMALE VON DREAM BOHRER

- YG-1's Dream Drill Series are suitable for high speed and accurate drilling operations by special design and high quality.
YG-1's DREAM Bohrer Serien sind durch ihre spezielle Konstruktion und höchste Genauigkeit geeignet zum Hochgeschwindigkeitsbohren und für genaue Bohrvorgänge.
- Good performance for Steels, Cast Irons, Tool steels, Alloy steels and Stainless steels.
Gute Leistung bei Stählen, Grauguss, Werkzeugstählen, Stahllegierungen sowie bei Rost- und Säurebeständigen Stählen.
- Rapid chip evacuation and excellent chip breaking can be achieved by special designed cutting edges on point and chip breakers on leading edges.
Schnelle Spanabfuhr und hervorragender Spanbruch durch speziell entwickelte Schneidengeometrien und Spanbrechern.
- High accuracy and stability.
Hohe Genauigkeit und Stabilität.
- Longer tool life with TiAlN coating.
Höhere Standzeiten mit TiAlN-Beschichtungen.
- Self-centering
Selbstzentrierend

17 HONING GUIDE OF DREAM DRILLS HINWEIS ZUM HONEN VON DREAM BOHRER

Dimension of Honing Abmessung beim Honen

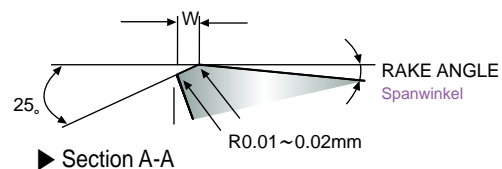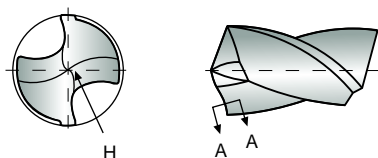


Scraper Schaben



Work Material	Alloy Steels	Mild Steels	Cast Iron
W(mm)	0.15~0.2	0.1~0.15	0.03


- ▶ The dimension W of stocked products is 0.1~0.15.
Das Maß w ist bei lagerhaltigen Produkten 0.1~0.15.

18 USE OF DREAM DRILLS VERWENDUNG VON DREAM BOHRER

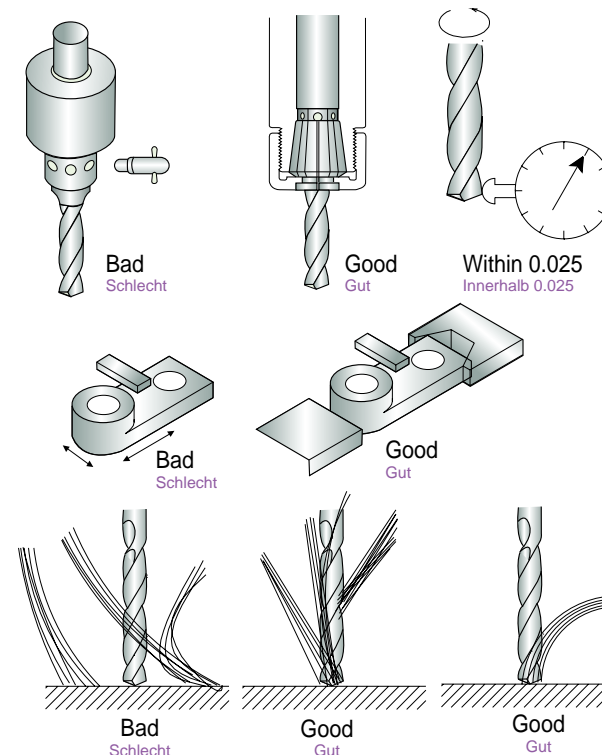

- ▶ Chucking with spring collet correctly.
Richtiges Spannen mit Spannzangen.
- ▶ Radial run out at cutting lip must not exceed 0.025 mm.
Radialer Rundlauf und der Schneidlippe darf nicht 0.025 überschreiten.
- ▶ Tighten clamp of work piece.
Sicheres Spannen des Werkstückes.
- ▶ Supply coolant enough to the entrance of hole.
Ausreichend Kühlmittelzufluss am Bohrloch.
- ▶ When using Dream Drills with Coolant holes, supply high pressure coolant.
Beim Verwenden von DREAM BOHRER mit Kühlkanal wird Hochdruckkühlung benötigt.

19 SHANK TYPE DREAM DRILLS WITH COOLANT HOLES SCHAFTAUSFÜHRUNG DREAM BOHRER MIT KÜHLKANAL

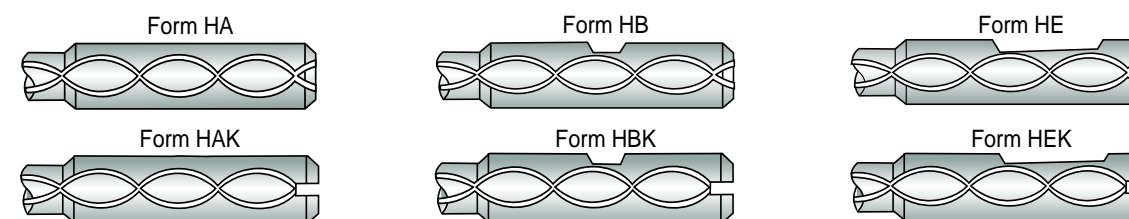

- ▶ Shank Type of stocked products is Form HA.
Schaftausführung von lagerhaltigen Produkten ist HA.
- ▶ Other shank types are available on your request.
Andere Schaftausführungen können geliefert werden.

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC	Examples	
P	1	Non-alloyed steel	About 0.15% C	Annealed	125		S15C, C15, 1015	
	2		About 0.45% C	Annealed	190	13	S45C, C45, 1045	
	3		About 0.45% C	Quenched & tempered	250	25		
	4		About 0.75% C	Annealed	270	28		
	5		About 0.75% C	Quenched & Tempered	300	32	SK5, Ck75, 1080	
	6	Low-alloyed Steel		Annealed	180	10	SCM440, 42CrMo4, 410	
	7			Quenched & Tempered	275	29		
	8			Quenched & Tempered	300	32		
	9			Quenched & Tempered	350	38		
	10	High-alloyed steel, and tool steel		Annealed	200	15	SKD, D2	
	11			Quenched & Tempered	325	35	SKH, SUH, M42	
M	12	Stainless Steel	Ferritic / Martensitic	Annealed	200	15	SUS 420, X40Cr13, 420	
	13		Martensitic	Quenched & Tempered	240	23		
	14		Austenitic		180	10		SUS 316, 316, X5CrNiMo 17 12 2
K	15	Grey cast iron	Pearlitic / Ferritic		180	10	FC, GG, EN-GJL-250	
	16		Pearlitic (Martensitic)		260	26		
	17	Nodular cast iron	Ferritic		160	3	FCD, GGG, EN-GJS-500-7	
	18		Pearlitic		250	25		
	19	Malleable cast iron	Ferritic		130		FCMW, FCMF, GTS, GJMB350-10	
20	Pearlitic			230	21			
N	21	Aluminum-wrought alloy	Not Curable		60		SAE 1000, AlMg 1, 3.3315	
	22		Curable Hardened		100		SAE 7050, AlCuMg 1, 3.1325	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		ADC12, G-AlSi12, 3.2581	
	24		≤ 12% Si, Curable Hardened		90		C4BS, G-AlSi10Mg, 3.2381	
	25		> 12% Si, Not Curable		130			
	26	Copper and copper alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		CuZn36Pb 3, 2.0375	
	27		CuZn, CuSnZn (Brass)		90		CuZn 15, 2.0240	
	28		CuSn, lead-free copper and electrolytic copper		100		G-CuZn40Fe, 2.0590	
	29	Non-metallic materials	Duroplastic, Fiber Reinforced Plastic				CFRP	
	30		Rubber, Wood, etc.					
S	31	Heat resistant super alloys	Fe Based	Annealed	200	15	X12 NiCrSi 36-16, 1.4864	
	32			Aged	280	30		
	33			Annealed	250	25		Inconel 718, NiCr20TiAl, 2.4631
	34		Ni or Co Based	Aged	350	38		
	35			Cast	320	34		G-X120Mn12, 1.3401
	36	Titanium alloys	Pure Titanium		400 Rm		TiAl6V4, 3.7165	
	37		Alpha + Beta Alloys Hardened		1050Rm			
H	38	Hardened steel			550	55	SK3	
	39				630	60		
	40	Chilled cast iron	Cast		400	42		
	41	Hardened cast iron	Hardened		550	55		

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRC
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
1.0037	STKM 12 C	St 37-2	-	4360 40 B	S235JR	E24-2	1311	Fe 360 B			16D	
1.0038	STKM 12 A	St 37-3	A570.36	4360 40 C	S275J2G3	E28-3	1312	Fe 360 D FF			ST14KP	
1.0045	SM 490 YA	S 355 JR	-	-	S 1207	E36-2	-	Fe 510 BFN				
1.0050	SS 50	St 50-2	A570 Gr. 50	4360 50 B	E 295	A50-2	2172	Fe 490			ST5PS	
1.0060	SM 58	St 60-2	A572 Gr. 65	4360 55 E	-	A60-2	1650	Fe 60-2			ST6PS	
1.0114		S 235 J0	-	En 40C	S 235 J0	E24-3		Fe 360 CFN				
1.0143		S 275 J0	-	-	S 275 J0	E28-3	1414	Fe 430 C				
1.0144	SM41C, SM400	St 44-3 N	A573 Gr. 81	4360 43C	S 275 J2 G3	E28-3	1412	Fe 430 D FF			ST14KP	
1.0149		Ro St 44-2	-	43C	S 275 J0 H	-	1412	Fe430C				
1.0301	S10C	C10	1010	045M10	C10	34C10, XC10		C10	F.1511	G10100	10	
1.0330	SPCC	St 12	-	DC 01	Fe P01	DC 01/Fe P01	1142	Fe P01			15KP	
1.0335	SPHE	D D 13 (StW 24)	A622(1008)	H 5 3	D D 13	3C		FeP13			08KP	
1.0338	SPCE	St 4	A620(1008)	14491CR	Fe P04	Fe 14	1147	DC04/FeP04			08JU	
1.0345	SPV 50	P235 GH	A516 Gr. 65	P 235 GH	P 235 GH	A 37 CP	1330	Fe E 235			K02503	
1.0401	S15C	C15	1015	080M15	-	C18RR, XC18	1350	C15, C16	F.1110	G10170	15	
1.0402	S20C	C22	1020	050 A 20	1 C 22	C20	1450	C 20	F.1120	G10200	20	
1.0425	SPV315	P265GH/HII				A42CP	1430	Fe4101KW			K02801	16K
1.0443	SC 450	GS-45	A2765-35	A1		E23-45M	1305					
1.0539		S355NH				TSE355-4	2134	Fe510B				
1.0545		S355N		4360-50E		E355R	2334	FeE355KG				
1.0546		S355NL		4360-50EE		E355FP	2135	FeE355KT				
1.0547		S355J0H		4360-50C		TSE355-3	2172	Fe510C				
1.0549		S355NLH					2135	Fe510D				
1.0553	SM 520 M	St52-3U	A14880-40	4360-50C		320-560M	1606	Fe510C				
1.0562	SM490A	St E 355	A633 Gr. C	P 355 N		FeE355KGN	2132	Fe E 355 KG			K12000	15GF
1.0565		W St E 355		P 355 NH		P 355 NH	2106	Fe E 355 KW			K01600	
1.0566	SLA 37	T St E 355		P 355 NL1		P 355 NL1	2107	Fe E 355 KT				
1.0570	SM 50 YA	St 52-3	1	4360-50 C	S355JR	E36-3	2172	Fe 510 B			17G15	
1.0715	SUM22	95Mn28	1213	230M07		S250	1912	CF5Mn28	F.2111	G12130		
1.0718	SUM22L	95MnPh28	12L13			S250Pb	1914	CF95MnPh28	F.2112	G12134		
1.0721		10S20	1108	10S20		10S20		CF10S20	F.2121	G11080		
1.0722		10SPb20	11L08			10PbF2		CF10SPb20		G11084		
1.0736	SUM25	95Mn36	1215			S300		CF9Mn36	F.2113	G12150		
1.0737		95MnPh36	12L14			S300Pb	1926	CF95MnPh36	F.2114	G12144		
1.0972		S315MC		1501-40F30		E315D						
1.0976		S355MC		1501-43F35		E355D	2642	FeE355TM				
1.0982		S460MC		1501-50F45								
1.0984		S500MC				E490D	2662	FeE490TM				
1.0986		S500MC		1501-60F55		E560D		FeE560TM				
1.1121	S10C	Ck10	1010	040A10		XC10	1265	C10	F.1510	G10100	10	
1.1141	S15	Ck15	1015	040A15	32C	XC15	1370	C15	F.1110	G10150	15	
1.1151	S20C	C22E	1020	055M15		2C22	1450	C20	F.1120	G10230	20	
1.8900	S25C	StE380	A572-60	436055E			2145	FeE390KG				
		St44-2	A36	436043A		NFA35-501E28	1411					
		StE320-3Z		1501160			1421					

P	VDI 3323 2		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.45% C, Annealed					190	13		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0501	S35C	C35	1035	080A32		1C35	1572	C35	F.113	G10350	35	
1.0503	S45C	C45	1045	060A47		XC42H1TS	1672	C45	F.114	G10450	45	
1.0511	S40C	C40	1040	080M40		1C40		C40	F.114.A	G10400	40	
1.0540	S 50 C	C50					1674	C50		G10500		
1.0551		GS-52	A2770-36	A2		280-480M	1505					
1.0553	SM 520 M	St52-3U	A14880-40	4360-50C		320-560M	1606	Fe510C				
1.0577		S 355 J 2 G 4	A738	Fe 510 D 2 FF		A52FP	2107					
1.0726		35520	1140	212M36	8M	35MF6	1957			G11400	40	
1.0727		45520	1146			45MF4	1973			G11460		
1.1157		40Mn4	1039	150M36	15	40M5				G10390	40G	
1.1158	S25C	C25E	1025	070M25		XC25		C25	F.1120	G10250	25	
1.1166	SMn433H	34Mn5	1536						T.O.B	G15360		
1.1167	SMn438(H)	36Mn5	1335	150M36		40M5	2120	36Mn6	F.1203	G13350	35G2	
1.1170	SCMn1	28Mn6	1330	150M28	14A	20M5		C28Mn	28Mn6	G13300	30G	
1.1178	S 30 C	C30E		080M30		XC32		C30	2C30	G10300		
1.1180		C35R	1035	080A35		3C35	1572		F.1135	G10350		
1.1181	S35C	C35E	1035	080A35		XC38	1572	C36	F.1130	G10340	35	
1.1191	S45C	Ck45	1045	080A46		XC45	1672	C45	F.1140		45	
1.1206	S 50 C	C50E	1050	080M50		2C50	1674	C50		G10500	50	
1.1213	S50C	Cf53	1050	070M55		XC48H1TS	1674	C53		G10500	50	

P	VDI 3323 3		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.45% C, Annealed					250	25		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0481	SG365	17 Mn 4/P 295 GH	A516 Gr.70	224-460B	P 295 GH	A 48 CP	2102	Fe E 295	A47RCl	K03501	14G2	
1.0501	S35C	C35	1035	080A32		1C35	1572	C35	F.1130	G10350	35	
1.0503	S45C	C45	1045	060A47		XC42H1TS	1672	C45	F.1140	G10450	45	
1.0614		C76D	1074			XC75				G10750		
1.0616		C86D	1086			XC80		C85		G10860		
1.0618		C92D	1095			XC90				G10950		
1.0726		35520	1140	212M36	8M	35MF6	1957			G11400	40	
1.1157		40Mn4	1039	150M36	15	40M5				G10390	40G	
1.1165	SMn433H	30Mn5	1036	120M36		35M5		30Mn5	F.8211	K13300	30G2	
1.1167	SMn438(H)	36Mn5	1335	150M36		40M5	2120	36Mn6	F.1203	G13350	35G2	
1.1186	S40C	C40E	1040	060A40		2C40		C40		G10400		
1.1191	S45C	Ck45	1045	080M46		2C45	1672	C45	F.1140		45	
1.1201	S50C	C45R	1049	080M46		3C45	1660	C45	F.1145		38HM	
1.1213	S50C	Cf53	1050	070M55		XC48H1TS	1674	C53		G10500	50	
1.7242	SCM 418 H	18CrMo4										
1.7337		16CrMo4-4	A387 Gr.12					A18CrMo45KW		K11564	15C M	
1.7362	SCMV 6	12CrMo195		3606-625		Z10CD5-05		16CrMo205		K41545		
		17MnV6	A572-60	436055E		NFA35-501E36	2142					

P	VDI 3323 4		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.75% C, Annealed					270	28		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0603	S70C-CSP	C67	107	080A67		XC65		C67		G10700		
1.0605		C75	1075	144980HS				C75		G10740	75	
1.1203	S55C	Ck55	1055	060A57		2C55	1655	C55	F.1150	G10550	55	
1.1209		C55R	1055	070M55		3C55		C55	F.1155	G10550		
1.1221	S58C	Ck60	1060	060A62	43D	2C60	1678	C60	F.1150	G10640	60	
1.1231	S70C-CSP	C67E	1070	060A67		XC68	1770	C70	F.5103	G10700	65GA	
1.1248	C75	C75E	1074	060A78		XC75	1774	C75	F.5107	G10800	75(A)	
1.1269	SK 5 -CSP	C85E	1086			XC90		C90		G10900	85(A)	
1.1274	SUP4	Ck 101	1095	060 A 96	C 100S	XC100	1870	C100	F.5117	G10950		
1.1545	SK 3	C 105 W1	W1	BW 2	C 105U	Y1 105	1880	C 100 KU	F.5118		U10A	
1.1663	SK 2	C125W	W112			Y2120					U13	

P	VDI 3323 5		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.75% C, Quenched & Tempered					300	32		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0070		St 70-2	1055	Fe690-2FN	-	A70-2	1655	Fe 690	F.1150		55	
1.0535	S55C	C55	1055	070M55		1C55	1655	C55		J05000	55	
1.0601	S58C	C60	1060	060A62	43D	1C60		C60		G10600	60(G)	
1.1203	S55C	Ck55	1055	060A57		2C55	1655	C55	F.1150	G10550	55	
1.1221	S58C	Ck60	1060	060A62	43D	2C60	1678	C60	F.1150	G10640	60	
1.1274	SUP4	Ck 101	1095	060 A 96	C 100S	XC100	1870	C100	F.5117	G10950		
1.1545	SK 3	C 105 W1	W1	BW 2	C 105U	Y1 105	1880	C 100 KU	F.5118		U10A	
1.1663	SK 2	C125W	W112			Y2120					U13	
1.5120		38MnSi4										
1.5710	SNC236	36NiCr6	3135	640A35	111A	35NC6						
1.7701		51CrMoV4						51CrMoV4				

P	VDI 3323 6		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Low-alloyed Steel			Annealed					180	10		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0116		St 37-3	A570 Gr. 36	4360-40C	S 235 J2 G3	E24-3	1312	Fe 360 D1(2)	AE235D		ST3KP	
1.0904	SKH 1, SKT 4	55Si7	9255	250A53	45	55S7	2085	55Si8	56Si7	G92550	55S2	
1.0961	SUP 7	60SiCr7	9262			60SiCr6		60SiCr8	60SiCr8	G92620		
1.2067		100Cr6	L3	BL3		Y100C6				100Cr6		
1.2108		90CrSi5	L1				2092	105WCR5				
1.2210		115CrV3	L2			100C3		107CrV3KU	F.520L		11KHF	
1.2241		51CrV4										
1.2330	SCM435TK	35CrMo4	4135	708A37		34CD4	2234	35CrMo4			35KHM	
1.2419	SKS31	105WCr6		105WC13		105WC13	2140	10WCr6			CWG	
1.2510	SKS3	100MnCrW4	01	B01		90MWCV 5	2140	95 MnWCr 5 KU	F.5220		9KHVG	
1.2542		45WCrV7	S1	BS1			2710	45WCrV8KU			5CW25F	
1.2550		60WCrV7	S1			55WC20	2710	58WCr9KU			5KHV25F	
1.2713	SKT4	55NiCrMoV6	L6			55NCDV7			F.5205		5CNM	
1.2721		50NiCr13	L6			55NVC6	2550		F.528			
1.2842		90MnCrV8	02	B02		90MV8				T31502	9G2F	
1.3501		100Cr2	E50100									
1.3505	SUJ2	100Cr6	52100	25135	31	100C6	2258	100Cr6	F.1310		SC C 15	
1.5024		46Si7				45S7		46Si7	F.1451			
1.5025		51Si7	9259H		50Si7	51S7	2090	50Si7	F.1450			
1.5026		55Si7			56Si7	55S7	2085	55Si7	F.1440	G92550	55S2	
1.5027		60Si7	9260	251A60	60Si7	60S7		60Si7	F.1441	G92600	60S2	
1.5028	SUP7	65Si7	9260H									
1.5415	STFA 12	15Mo3	A204Gr.A	1503-243B		15D3	2912	16Mo3(KG)	F.2601		K11820	
1.5419	SCPH11	20Mo4	4419	1503-243-430			2512	G20Mo5			G44190	
1.5423	SB450M	16Mo5	4520	1503-245-420				16Mo5(KG)	F.2602		K11522	
1.5622		14Ni6	A350-LF5			16N6		14Ni6(KG)	F.2641			
1.5732	SNC415(H)	14NiCr10	3415			14NC11		16NiCr11				
1.5752	SNC815(H)	14NiCr14	3310	655M13	36A	12NC15					20X2H4A	
1.6511	SUP10	36CrNiMo4	9840	816M40	110	40NCD3		36NiCrMo4(KB)			40C N2MA	
1.6523	SNCM220(H)	21NiCrMo2	8620	805M20	362	20NCD2	2506	20NiCrMo2			20C GNM	
1.6546	SNCM240	40NiCrMo2-2	8740	311-Tyre7				40NiCrMo2(KB)			38C GNM	
1.6566		17NiCrMo6-4										
1.6587		17CrNiMo6		820A16		18NCD6		14NiCrMo13				
1.6657		10NiCrMo13-4						14NiCrMo131				
1.7015	SCr415(H)	10Cr3	5015	523M15		12C3				G50150	15C	
1.7033	SCr430(H)	34Cr4	5132	530A32	18B	32C4		34Cr4(KB)		G51300	35C	
1.7035	SCr440(H)	41Cr4	5140	530M40	18	42C4	2245	41Cr4		G51400	40H	
1.7131	SCR 415	16MnCr5	5115	527M17		16MCS	2511	16MnCr5		G51150	12KHN2	
1.7139		16MnCr55					2127				18HG	
1.7176	SUP9(A)	55Cr3	5155	527A60	48	55C3	2253	55Cr3			50C GA	
1.7218	SCM420	25CrMo4	4130	CD5110		25CD4	2225	25CrMo4(KB)			20C M	
1.7220	SCM432	34CrMo4	4135	708 A 37		35CD4	2234	34CrMo4			35C M	
1.7223	SNB22-1	41CrMo4	4142					41CrMo4			40C FA	
1.7225	SCM 440 (H)	42CrMo4	4140	708 M 40	42 CrMo 4	42 CD 4	2244	42 CrMo 4	F.1252		38HM	
1.7228		55NiCrMoV6G		823M30	33		2512	653M31				
1.7262	SCM415(H)	15CrMo5				12CD4	2216	12CrMo4				
1.7321		20MnCr4					2625					
1.7335	SCM415(H)	13CrMo4-4	A182-F11	1501-620		15CD4-5	2216	14CrMo45			12C M	
1.7361		32CrMo12		722M24	40B	30CD12	2240	30CrMo12	F.124A			
1.7380		10CrMo9-10	A182F22	1501-622		12CD9-10	2218	12CrMo9			12KH8	

P	VDI 3323 6		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Low-alloyed Steel			Annealed					180	10		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.7715		14MoV6-3			1503-660-440			13MoCrV6				
1.8159	SUP 10	50CrV4	6150	735A50	47	50CrV4	2230	50CrV4		G61500	50C GFA	
1.8161		58CrV4										
1.8509	SACM 645	41CrAlMo7	A355A	905M39	41B	40CAD6-12	2940	41CrAlMo7				
1.8523		39CrMoV13-9		897M39	40C			36CrMoV12				

P	VDI 3323 7		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Low-alloyed Steel			Quenched & Tempered					275	29		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.5415	STFA 12	15Mo3	A204Gr.A	1503-243B		15D3	2912	16Mo3(KG)	F.2601		K11820	
1.5423	SB450M	16Mo5	4520	1503-245-420				16Mo5(KG)	F.2602		K11522	
1.5622		14Ni6	A350-LF5					14Ni6(KG)	F.2641			
1.5732	SNC415(H)	14NiCr10	3415			14NC11		16NiCr11				
1.5752	SNC815(H)	14NiCr14	3310	655M13	36A	12NC15					20X2H4A	
1.5755	SNC236	31NiCr14		653M31		18NC13	2534		F.1270			
1.6565	SNCM447	40NiCrMo6	4340	817M40	24	35NCD6	2541	35NiCrMo6(KB)			38C 2N2MA	
1.6587		17CrNiMo6		820A16		18NCD6		14NiCrMo13				
1.6657		10NiCrMo13-4						14NiCrMo131				
1.6957		26NiCrMoV14-5										
1.7015	SCr415(H)	10Cr3	5015	523M15		12C3				G50150	15C	
1.7262	SCM415(H)	15CrMo5				12CD4	2216	12CrMo4				
1.7335	SCM415(H)	13CrMo4-4	A182-F11	1501-620		15CD4-5	2216	14CrMo45			12C M	
1.7380		10CrMo9-10	A182F22	1501-622		12CD9-10	2218	12CrMo9			12KH8	
1.7715		14MoV6-3			1503-660-440			13MoCrV6				
1.7733		24CrMoV55				20CDV6		21CrMoV511				
1.7755		GS-45CrMoV10-4										
1.8070		21CrMoV511						35NiCr9				

P	VDI 3323 8		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Low-alloyed Steel			Quenched & tempered					300	32		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.1730		C45W3	C45W			XC48						
1.2332	SCM(440)	47CrMo4	4142	708M40	19A	42CD4	2244	42CrMo4				
1.5736	SNC 631 (H)	36NiCr10	3435			30NC11						
1.6523	SNCM220(H)	21NiCrMo2	8620	805M20	362	20NCD2	2506	20NiCrMo2			20C GNM	
1.7033	SCr430(H)	34Cr4	5132	530A32	18B	32C4		34Cr4(KB)		G51300	35C	
1.7218	SCM420	25CrMo4	4130	CD5110		25CD4	2225	25CrMo4(KB)			20C M	
1.8515		32CrMo12		722M24	40B	30CD12	2240	32CrMo12	F.124A			

P	VDI 3323 9		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Low-alloyed Steel			Quenched & Tempered					350	38		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0904	SKH 1, SKT 4	55Si7	9255	250A53	45	55S7	2085	55S8		G92550	55S2	
1.0961	SUP 7	60SiCr7	9262			60SiCr6		60SiCr8		G92620		
1.2067		100Cr6	L3	BL3		Y100C6		100Cr6				
1.2419	SKS31	105WCr6		105WC13		105WC13	2140	10WCr6			CWG	
1.2542		45WCrV7	S1	B51			2710	45WCrV8KU			5CW25F	
1.2713	SKT4	55NiCrMoV6	L6			55NCDV7			F.5205		5C NM	
1.4882		X50CrMnNiNbN219				Z50CMNNb21-09						
1.5120		38MnSi4										
1.5710	SNC236	36NiCr6	3135	640A35	111A	35NC6						
1.5755	SNC236	31NiCr14		830m31		18NC13	2534		F.1270			
1.6511	SUP10	36CrNiMo4	9840	816M40	110	40NCD3		36NiCrMo4(KB)			40C N2MA	
1.6546	SNCM240	40NiCrMo2-2	8740	311-Tyre7				40NiCrMo2(KB)			38C GNM	
1.7035	SCr440(H)	41Cr4	5140	530M40	18	42C4	2245	41Cr4		G51400	40H	
1.7176	SUP9(A)	55Cr3	5155	527A60	48	55C3	2253	55Cr3			50C GA	
1.7220	SCM432	34CrMo4	4135	708Aa37		35CD4	2234	34CrMo4			35C M	
1.7223	SNB22-1	41CrMo4	4142					41CrMo4			40C FA	
1.7225	SCM 440 (H)	42CrMo4	4140	708 M 40	42 CrMo 4	42 CD 4	2244	42 CrMo 4	F.1252		38HM	
1.7361		32CrMo12		722M24	40B	30CD12	2240	30CrMo12	F.124A			
1.8159	SUP 10	50CrV4	6150	735A50	47	50CrV4	2230	50CrV4	51CrV4	G61500	50C GFA	
1.8161		58CrV4										
1.8509	SACM 645	41CrAlMo7	A355A	905M39	41B	40CAD6-12	2940	41CrAlMo7				
1.8523		39CrMoV13-9		897M39	40C			36CrMoV12				

P	VDI 3323 10		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	High-alloyed steel, and tool steel			Annealed					200	15		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0347	SPCD	RR St 3	A619	CR 3	Fe P03	F 13		DC03/FeP03			08JU	
1.0723	SUM32	15S22		210A15			1922		F.210F			
1.2080	SKD1	X210Cr12	D3	BD3	X210Cr12	Z200C12		X205Cr12KU		T30403	KH12	
1.2162	SCR 420 H	21MnCr5				20MCS						
1.2311		40CrMnMo7				40CMD8		35CrMn08KU				
1.2312		40CrMnMoS8.6	P20+S			40CMD8S						
1.2316		X36CrMo17			X38CrMo16							
1.2343	SKD 6	X38CrMoV5-1	H11	BH11		Z38CDV5		X37CrMoV51KU		T20811	4C 5MFS	
1.2344	SKD61	X40CrMoV5-1	H13	BH13		Z40CDV5	2242	X40CrMoV511KU	F.5318	T20813	4C 5MFI5	
1.2363	SKD12	X100CrMoV5-1	A2	BA2		Z100CDV5	2260	X100CrMoV51KU	F.5227		9KH5VF	
1.2379	SKD11	X155CrWMo121	D2	BD2		Z160CDV12	2310	X165CrMoW12KU		T30402	KH12MF	KRUPP2379
1.2436	SKD 2	X210CrW12	D4(D6)	BD6		Z200CD12	2312	X215CrW121KU	F.5213		KH12	

P	VDI 3323 10		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	High-alloyed steel, and tool steel			Annealed					200	15		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.2510	SKS3	100MnCrW4	O1	B01		90MWCV 5	2140	95 MnWCr 5 KU	F.5220		9KHVG	
1.2581	SKD5	X30WCrV9-3	H21	BH21		Z30WCV9		X30WCrV93KU	F.526	T20821	3C 2W8F	
1.2601		X165CrMoV12					2310	X160CrMoV12			KH12MF	
1.2606	SKD 62	X37CrMoW51	H12	BH12		Z35CWDV5		X35CrMoW05KU	F.537	T20812	5C NM	
1.2764		X19NiCrMo4										
1.2767		X45NiCrMo4				45NCD16		40NiCrMoV8KU				
1.2842		90MnCrV8	O2	B02		90MV8		90MnCrV8KU		T31502	9G2F	
1.3243	SKH55	S6-5-2-5	T15			KCV06-05-05-04-02	2723	H56-5-2-5			R6M5K5	
1.3249	SKH 3	S18-1-2-5	T4	BT4		Z80WKC18-05-04					R18K5F2	
1.3343	SKH51, SKH9	S6-5-2	M2	BM2		Z85WDCV	2722	H5652	F.5604		R6M5	
1.3348	SKH 58	S2-9-2	M7			Z100DCWV09-04-02	2782	H5292	F.5607			
1.3355	SKH 2	S18-0-1	T1	BT1		Z80WCV18-4-01					R18	
1.4718	SUH1	X45CrSi9-3	HN3	401S45	52	Z45CS9		X45CrSi8	F.322		40C 9S2	
1.5662	SL9N60(53)	X8Ni9	ASMA353	502-650		9Ni		X10Ni9	F.2645			
1.5680		12Ni19	2515	12Ni19		Z18N5						

P	VDI 3323 11		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	High-alloyed steel, and tool steel			Quenched & Tempered					325	35		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.2080	SKD1	X210Cr12	D3	BD3	X210Cr12	Z200C12		X205Cr12KU		T30403	KH12	
1.2344	SKD61	X40CrMoV5-1	H13	BH13		Z40CDV5	2242	X40CrMoV511KU	F.5318	T20813	4C 5MFI5	
1.2363	SKD12	X100CrMoV5-1	A2	BA2		Z100CDV5	2260	X100CrMoV51KU	F.5227		9KH5VF	
1.2436	SKD 2	X210CrW12	D4(D6)	BD6		Z200CD12	2312	X215CrW121KU	F.5213		KH12	
1.2581	SKD5	X30WCrV9-3	H21	BH21		Z30WCV9		X30WCrV93KU	F.526	T20821	3C 2W8F	
1.2601		X165CrMoV12					2310	X160CrMoV12			KH12MF	
1.2714	SKT 4	55NiCrMoV7	6F3/L6			55NiCrMoV7			F.5205		5KHNV	
1.3202		S12-1-4-5		BT15				H512-1-5-5				
1.3207		S10-4-3-10		BT42		Z130WKCDV						
1.3243	SKH55	S6-5-2-5	T15			KCV06-05-05-04-02	2723	H56-5-2-5			R6M5K5	
1.3246		S7-4-2-5	M35			Z110WKCDV07-05-04		H57-4-2-5				
1.3247	SKH 51	S2-10-1-8	M42	BM42		Z110DKCW09-08-04		H52-9-1-8			R2AM9K5	
1.3255	SKH 3	S18-1-2-5	T4	BT4		Z80WKC18-05-04					R18K5F2	
1.3343	SKH51, SKH9	S6-5-2	M2	BM2		Z85WDCV	2722	H5652	F.5604		R6M5	
1.3348	SKH 58	S2-9-2	M7			Z100DCWV09-04-02	2782	H5292	F.5607			
1.3355	SKH 2	S18-0-1	T1	BT1		Z80WCV18-4-01					R18	
1.4718	SUH1	X45CrSi9-3	HN3	401S45	52	Z45CS9		X45CrSi8	F.322		40C 9S2	
1.4935	SUH 616	X20CrMoWV121	422							S42200		
1.5680		12Ni19	2515	12Ni19		Z18N5						

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRC
			AISI/ASTM/SAE	BS	EN	Stainless steel						
			Stainless steel			Ferritic / Martensitic, Annealed					200	15
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.4000	SUS403	X6Cr13	403	403S17		Z6C13	2301	X6Cr13	F.3110	S40300	08C 13	ATI 410S
1.4001		X7Cr14	410 S	403S7		Z8C13	2301		F.8401		08C 13	
1.4002	SUS 405	X6CrAl13	405	405S17		Z6CA13	2302	X6CrAl13		S40500		
1.4005	SUS416	X12Cr13	416	416S21		Z11CF13	2380	X12Cr13	F.3411	S41600		ATI 416
1.4006	SUS410	X12Cr13	410	410S21	56A	Z10C13	2302	X12Cr13	F.3401	S41000	12C 13	ATI 410
1.4016	SUS430	X6Cr17	430	430S15	X8Cr17	Z8C17	2320	X8Cr17	F.3113	S43000	12C 17	ATI 430
1.4027	SCS 2	GX20Cr14		420C29		Z20C13M					20C 13L	
1.4028	SUS420J2	X30Cr13	420	420S45		Z30C13	2304			S42020	20C 13	
1.4034	SUS420J2	X46Cr13		420S45		Z40C14		X40Cr14	F.3405			
1.4057	SUS431	X19CrNi17-2	431	431S29	57	Z15CN16-02	2321	X16CrNi16	F.3427	S43100	20C 17N2	431 (HT)
1.4086		GX120Cr29		452C11								
1.4104	SUS430F	X12CrMoS17	430F	420S37		Z10CF17	2383	X10CrS17	F.3117	S43020		
1.4112	SUS 440 B	X90CrMoV18	440B							S44003	95KH18	
1.4113	SUS434	X6CrMo17	434	434S17		Z8CD17-01	2325	X8CrMo17		S43400		AL 434
1.4313	SCS5	X3CrNi13-4	CA6-NM	425C11		Z4CND13-04M	2385	(G)X6CrNi304		J91540		
1.4340		GX40CrNi274								J92615		
1.4417		X2CrNiMoS195	S31500									
1.4418		X4CrNiMo165				Z6CND16-04-01	2387					APX4
1.4510	SUS430LX	X6CrTi17	XM8			Z4CT17		X6CrTi17	F.3115	S43035	08C 17T	430 Ti
1.4511	SUS430LK	X6CrNb17				Z4CNb17		X6CrNb17	F.3122			AXCS25
1.4512	SUH409	X6CrTi12	409	LW19		Z3CT12		X6CrTi12		S40900		
1.4720		X20CrMo13										
1.4724	SUS 405	X10CrAl13	405	403S17		Z10C13		X10CrAl12	F.311		10C 13SJU	
1.4742	SUS430	X10CrAl18	430	439S15	60	Z10CAS18		X8Cr17	F.3113	S43000	15C 13SJU	
1.4747	SUH4	X80CrNiSi20	HNV6	443S65	59	Z80CSN20-02		X80CrSiNi20	F.320B	S65006		
1.4749		X18CrN28	446								15KH28	
1.4762	SUH446	X10CrAl24	446			Z10CAS24	2322	X16Cr26		S44600		
1.4871	SUH35,SUH36	X53CrMnNiN21-9	EV8	349S54		Z52CMN21-09		X53CrMnNiN219		S63008	55C 20G9AN4	
		X10CrNi15	429									
		X12CrNi18-9	302	302S31		Z10CN18-09	2330					

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRC
			AISI/ASTM/SAE	BS	EN	Stainless steel						
			Stainless steel			Martensitic, Quenched & Tempered					240	23
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.4000	SUS403	X6Cr13	403	403S17		Z6C13	2301	X6Cr13	F.3110	S40300	08C 13	ATI 410S
1.4001		X7Cr14	410 S	403S7		Z8C13	2301		F.8401		08C 13	
1.4006	SUS410	X12Cr13	410	410S21	56A	Z10C13	2302	X12Cr13	F.3401	S41000	12C 13	ATI 410
1.4016	SUS430	X6Cr17	430	430S15	X8Cr17	Z8C17	2320	X8Cr17	F.3113	S43000	12C 17	ATI 430
1.4021	SUS 420J1	X20Cr13	420	420S37		Z20C13	2303	14210	F.5261	S42000	20C 13	ATI 420
1.4027	SCS 2	GX20Cr14		420C29		Z20C13M					20C 13L	
1.4031	SUS 420 J2	X40Cr13	420			Z40C14	-2304		F.3404	S42080	40C 13	
1.4034	SUS420J2	X46Cr13		420S45		Z40C14		X40Cr14	F.3405			
1.4057	SUS431	X19CrNi17-2	431	431S29	57	Z15CN16-02	2321	X16CrNi16	F.3427	S43100	20C 17N2	431 (HT)
1.4104	SUS430F	X12CrMoS17	430F	420S37		Z10CF17	2383	X10CrS17	F.3117	S43020		
1.4113	SUS434	X6CrMo17	434	434S17		Z8CD17-01	2325	X8CrMo17		S43400		AL 434
1.4313	SCS5	X3CrNi13-4	CA6-NM	425C11		Z4CND13-04M	2385	(G)X6CrNi304		J91540		
1.4544		A 700	321	S.524		Z 10 CNT 18 11		X6CrNiTi1811		J92630	08C 18N12T	
1.4546		X5CrNiNb18-10	348	347S31				X6CrNiNb1811		J92640		ATI 348
1.4871	SUH35,SUH36	X53CrMnNiN21-9	EV8	349S54		Z52CMN21-09		X53CrMnNiN219		S63008	55C 20G9AN4	
1.4922		X20CrMnV12-1					2317	x20CrMnO11201				
1.4923		X22CrMoV121										Jethete X20

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRC	
			AISI/ASTM/SAE	BS	EN	Stainless steel							
			Stainless steel			Austenitic					180	10	
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands	
1.4301	SUS 304	X5CrNi18-10	304	304S15		Z5CN18-09	2332			F.3551	S30409	08C 18N10	
1.4305	SUS303	X10CrNiS18-10	303	303S21	58M	Z8CNF18-09	2346	X10CrNiS18.09	F.3508	S30300	30C 18N11	ATI 303	
1.4306	SCS19	X2CrNi1911	304L	304C12	X3CrNi1810KD	Z2CN18-09	2352	GX2CrNi1910	F.3503	S30403	03KH18N11	ATI 304L	
1.4308	SUS304L	GX6CrNi18-9	CF-8	304C15	58E	Z6CN18-10M	2333					CF-8	
1.4310	SUS 301	X10CrNi18-8	301	301S21		Z12CN17-07	2331	X2CrNi1807	F.3517	S30100	07KH16N6	ATI 301	
1.4311	SUS304LN	X2CrNi18 10	304LN	304S62		Z2CN18-10	2371	X2CrNi1810	F.3541	S30453	03KH18N11		
1.4312	SCS12	GX10CrNi188	305	302C25		Z10CN18-9M					10C 18N9L	ATI 305	
1.4350	SUS304	X5CrNi18-9	304	304S15	58E	Z6CN18-09	2332	X5CrNi1810	F.3551	S30400		ATI 304	
1.4362		X2CrNiN234	S32304			Z2CN23-04AZ	2327			S32304		ATI 2304TM	
1.4371		X3CrMnNiN18887	202	284S16		Z8CMN18-08-05							
1.4401	SUS316	X5CrNiMo17-12-2	316	316S13		Z3CND17-11-01	2347	X5CrNiMo17 12 2	F.3534	S31600	08KH17H13M2T	ATI 316	
1.4404	SUS316L	X2CrNiMo17-13-2	316L	316S11		Z2CND17-12	2348	X2CrNiMo1712	F.3533	S31603		ATI 316L	
1.4406	SUS316LN	X2CrNiMoN17122	316LN	316S61		Z2CND17-12AZ		X2CrNiMo1712	F.3542	S31653	07C 18N	ATI 316LN	
1.4408	SCS14	GX6CrNiMo18-10	CF-8M	316C16			2343	X7CrNiMo2010	F.8414	J92900	10G252MSL		
1.4410	SCS 14 A	GX10CrNiMo18-9				Z5CND20-12M	2328			S32750			
1.4429	SUS316LN	X2CrNiMoN17-13-3	316Ln	316S62		Z2CND17-13AZ	2375	X2CrNiMoN17133	F.3543		03KH16N15M3		
1.4435	SUS316L	X2CrNiMo18143	316L	316S11		Z3CND17-12-03	2375	X2CrNiMo17 13 2	F.3533	S31603	03C 17N14M3		
1.4436	SUS316	X3CrNiMo17-13-3	316	316S19		Z6CND18-12-03	2343	X5CrNiMo17 12 2	F.3543	S31600			
1.4438	SUS317L	X2CrNiMo18164	317L	317S12		Z2CND19-15-04	2367	X2CrNiMo18 16 4	F.3539	S31703		ATI 317L	
1.4439		X2CrNiMoN17135	(s31726)			Z3CND18-14-06AZ							
1.4440		X2CrNiMo18-16											
1.4449	SUS317	X5CrNiMo17133	317	317S16				X5CrNiMo1815		S31700		ATI 317	
1.4460	SUS 329 J1	X8CrNiMo275	329				2324			S32900		10RE51	
1.4462	SUS329J3L	X2CrNiMoN2253		318S13		Z3CND22-05AZ	2377			S31803		ATI 2205TM	
1.4500		X7NiCrMoCuNb2520				Z3NCNDU25-20M				J95150			
1.4521	SUS444	X2CrMoTi18-2	443444				2326	X2CrMoTiNb18 2	F.3123				
1.4539		X1NiCrMoCuN25205				Z2NCNDU25-20	2562			N08904		ATI 904L	
1.4541	SUS321	X14CrNiTi18-10	321	321S31		Z6CNT18-10	2337	X6CrNiTi18 11	F.3523	S32100	06C 18N10T	ATI 321	
1.4542	SUS630	X5CrNiCuNb174	630			Z7CNU15-05						UGIMA 4542	
1.4545		Z7CNU15.05	15-5PH							S15500		ATI 15-5	
1.4547		X1CrNiMoN20187					2378			S31254		Uranus B25 6Mo	
1.4550	SUS347	X6CrNiNb18-10	347	347S17	58F	Z6CNNb18-10	2338	X6CrNiNb18 11	F.3552	S34700	08C 18N12B	ATI 347	
1.4552	SCS 21	GX7CrNiNb18-9				Z4CNNb19-10M				J92710			
1.4568	SUS 631	X 7 CrNiAl 17 7					2388	Z8CNA17-07		S17700	09C 17N10U1	17-7PH	
1.4571	SUS 316Ti	X6CrNiMoTi17-12-2	316Ti	320S31	58J	Z6NDT17-12	2350	X6CrNiMoTi17 12	F.3535		10C 17N13M2T	ATI 316Ti	
1.4581	SCS 22	GX5CrNiMoNb18				Z4CNDNb18-12M							
1.4583		X6CrNiMoNb18-12	318	303S21		Z15CNS20-12		X15CrNiSi2 12					
1.4585		GX7CrNiMoCuNb1818						X6CrNiMoTi17 12		J94651			
1.4821		X20CrNiSi254				Z20CNS25-04				S44635			
1.4823		GX40CrNiSi274								J92605			
1.4828	SCS17	X15CrNiSi20-12	309	309S24	58C	Z15CNS20-12				F.8414	S30900	20C 20N14S2	ATI 309
1.4833	SUS 309 S	X6CrNi2213	309S	309S13		Z15CN24-13				J93400			
1.4845	SUH310	X12CrNi25-21	310S	310S24		Z12CN25-20	2361	X6CrNi2520	F.331	S31008	20C 23N18	ATI 310S	
1.4878	SUS321	X12CrNiTi18-9	321	321S20	58B	Z6CNT18-12(B)	2337	X6CrNiTi1811	F.3553	S32100		ACX315	
1.4891		X5CrNiNb18-10	S330415								2372		
1.4893		X8CrNiNb11	S30815								2368		
1.4948		X6CrNi1811	304H	304S51		Z5CN18-09	2333			S30480			
1.4980		X5NiCrTi2515	660				2570			S66286		Incoloy A 286	
		X5NiCrTi3525											
		X2CrNiMoN18134	S31753										
		X2CrNiMoN25227											

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<p>K VDI 3323 15 Grey cast iron Pearlitic / Ferritic HB 180 HRc 10</p>												
0.6010	FC100	GG10	A48 20 B	Grade 100	GJL-100	Ft 10 D	0100	G10	FG10		Sc 10	
0.6015	FC150	GG15	A48 25 B	Grade 150	GJL-150	Ft 15 D	0115	G15	FG15		Sc 15	
0.6020	FC200	GG20	A48 30 B	Grade 220	GJL-200	Ft 20 D	0120	G20	FG20	W06020	Sc 20	
0.6025	FC250	GG25	A48 40 B	Grade 260	GJL-250	Ft 25 D	0125	G25	FG25		Sc 25	
0.6660		GGL-NiCr 20 2	1050/700/7	Grade F2	GJLA-XNiCr 20-2	L-NC 202	0523	-		F41002	Ni-Resist 2	
1.4449	SUS317	XSCrNiMo17133	317	317S16				XSCrNiMo1815		S31700	ATI 317	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<p>K VDI 3323 16 Grey cast iron Pearlitic (Martensitic) HB 260 HRc 26</p>												
0.6025	FC250	GG25	A48 40 B	Grade 260	GJL-250	Ft 25 D	0125	G25	FG25		Sc 25	
0.6030	FC300	GG30	A48 45 B	Grade 300	GJL-300	Ft 30 D	0130	G30	FG30		Sc 30	
0.6035	FC350	GG35	A48 50 B	Grade 350	GJL-350	Ft 35 D	0135	G35	FG35		Sc 35	
0.6040	FC400	GG40	A48 60 B	Grade 400	GJL-400	Ft 40 D	0140	G40	FC40		Sc 40	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<p>K VDI 3323 17 Nodular cast iron Ferritic HB 160 HRc 3</p>												
0.7033	FCD350-22L	GGG35.3	-	350/22L40	GJS-350-22-LT	FGS 370-17	0717-15	-				
0.7040	FCD400	GGG40	60-40-18	SNG 420-12	GJS-400-15	FCS 400-12	0717-02	GS 400-12	FG E38-17	F32800	Vc 42-12	
0.7043	FCD 370	GGG40.3	60-40-18	SNG 370-17	GJS-400-18-LT	FGS 370-17	0717-12	GS0 42-17			Vc 42-12	
0.6040	FC400	GG40	A48 60 B	Grade 400	GJL-400	Ft 40 D	0140	G40	FC40		Sc 40	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<p>K VDI 3323 18 Nodular cast iron Pearlitic HB 250 HRc 25</p>												
0.7050	FCD500	GGG50	80-55-06	SNG 500-7	GJS-500-7	FGS 500-7	0727-02	GS 500-7	FG E50-7	F33100	Vc 50-2	
0.7060	FCD600	GGG60	80-55-06	SNG 600-3	GJS-600-3	FGS 600-3	0732-03	GS 600-3	FG E60-2		Vc 60-2	
0.7070	FCD700	GGG70	100-70-03	SNG 700-2	GJS-700-2	FGS 700-2	0737-01	GS 700-2	FG S70-2	F34800	Vc 70-2	
0.7652	FCDA-NiMn 13 7	GGG NiMn 13-7	-	Grade S6	GJSA-XNiMn 13-7	FGS Ni13 Mn7	0772	-			Nodumag	
0.7660		GGG NiCr 20-2	A436 D2	Grade S2	GJSA-XNiCr 20-2	FGS Ni20 Cr2	0776	-			Ni-Resist D-2	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<p>K VDI 3323 19 Malleable cast iron Ferritic HB 130 HRc</p>												
0.8135	FCMW330	GTS-35	32510	B 340-12	GJMB350-10	MN 35-10	0815	GMN 35	GTS35		Kc 35-10	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<p>K VDI 3323 20 Malleable cast iron Pearlitic HB 230 HRc 21</p>												
0.8145	FCMW370	GTS-45	A220-40010	P 440-7	GJMB450-6	MN 450	0852	GMN 45				
0.8155	FCMP490	GTS-55	50005	P 510-4	GJMB-550-4	MP 50-5	0854	GMN 55			Kc 60-3	
0.8165	FCMP590	GTS-65	70003	P 570-3	GJMB-650-2	MN 650-3	0856	GMN 65				
0.8170	FCMP690	GTS-70	90001	P 690-2	GJMB-700-2	MN 700-2	0862	GMN 70			Kc 70-2	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc	
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST
3.0205		Al99	Al99										
3.0255	(A1050)	Al99.5	1000	L31		A59050C						D1	
3.3315		AlMg1											

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc	
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST
3.1325		AlCuMg1										AD35	
3.1655	A2011	AlCuSiPb											
3.2315		AlMgSi1											AK9
3.4345		AlZnMgCu0.5	7050	L86		AZ4GU/9051				811-04			
3.4365	7075	AlZnMgCu1.5	7075	7075		7075				AlZn5.8MgCuCr			B95

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc	
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST
3.2163		G-AlSi9Cu3										VAL8	
3.2382		GD-AlSi10Mg											
3.2383		G-AlSi0Mg(Cu)	A360.2	LM9						4253			
3.2581		G-AlSi12											
3.3561		G-AlMg5											
3.5101		G-MgZn4sE1Zr1	ZE41	MAG5									
3.5103		MgSE3Zn27r1	EZ33	MAG6		G-TR3Z2							
3.5812		G-MgAl8Zn1	AZ81	NMAG1									
3.5912		G-MgAl9Zn1	AZ91	MAG7									
			A356-72	2789		NFA32-201							
A5052			356.1	LM25						4244			AK7
		G-AlSi12	A413.2	LM6						4261			
ADC12		G-AlSi12(Cu)	A413.1	LM20						4260			AK12
A6061		GD-AlSi12	A413.0							4247			
A7075		GD-AlSi8Cu3	A380.1	LM24						4250			

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc	
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST
2.1871		G-AlCu4TiMg											
3.1754		G-AlCu5Ni1.5											
3.2371		G-AlSi7Mg	4218B										AK8
3.2373	C4BS	G-AlSi9MgWA	SC64D						A-57G	4251			AK9
3.2381		G-AlSi10Mg											AK12
3.5106		G-MgAg3SE2Zr1	QE22	mag12									
		G-ALMG5	GD-AlSi12	LMS					A-SU12	4252			

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc	
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST
2.0375		CuZn36Pb3											LS60-2
2.1090		G-CuSn75pb	C93200							U-E7Z5pb4			
2.1096		G-CuSn5ZnPb	c83600	LG2									
2.1098		G-CuSn2Znpb	C83600										
2.1182		G-CuPb15Sn	C23000	LB1						U-pb15E8			

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc		
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST	Brands
2.0240	C2300	CuZn15											L90	
2.0321		CuZn37	C27200	cz108						CuZn36,CuZn37	C2700			L63
2.0590		G-CuZn40Fe												
2.0592		G-CuZn35Al1	C86500	U-Z36N3						HTB1				
2.0596		G-CuZn34Al2	C86200	HTB1						U-Z36N3				LS23AD
2.1293		CuCrZr	C18200	CC102						U-Cr0-8Zr				

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc		
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS			GOST	Brands
2.0060		E-Cu57												
2.0966		CuAl10Ni5Fe4	C63000	Ca104						U-A10N				BrAD
2.0975		G-CuAl10Ni	B-148-52											
2.1050		G-CuSn10	c90700	CT1										
2.1052		G-CuSn12	C90800	pb2						UE12P				
2.1292		G-CuCrF35	C81500	CC1-FF										

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 31 Heat resistant super alloys Fe Based, Annealed HB 200 HRc 15</p>												
1.4558	NCF 800TB	X2NiCrAlTi3220	N08800	NA15								
1.4562		X1NiCrMoCu32287	N08031									
1.4563		X1NiCrMoCuN31274	N08028			Z1NCDU31-27-03	2584				EK77	
1.4864	SUH330	X12NiCrSi36-16	330	NA17		Z12NCS37-18					N08330	
1.4865	SCH15	GX40NiCrSi38-18		330C40				XG50NiCr3919			J94605	
1.4958		X5NiCrAlTi3120										

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 32 Heat resistant super alloys Fe Based, Aged HB 280 HRc 30</p>												
1.4977		X40CoCrNi2020				Z42CNKDWNb						

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 33 Heat resistant super alloys Ni or Co Based, Annealed HB 250 HRc 25</p>												
2.4360		NiCu30Fe		NA13		NU30					N04400	Monel400
2.4603		NiCr 30 FeMo	5390A			NC22FeD						Hastelloy G-30
2.4610		NiMo16Cr16Ti									N26455	HastelloyC-4
2.4630		NiCr20Ti		HRS_203-4		NC20T					N06075	Nimonic75
2.4631	NCF 80A	NiCr20TiAl		Hr40		NC20TA					N07080	KHN777YuR Nimonic 80A
2.4642	NCF 690	NiCr29Fe				Nnc30Fe					N06690	Inconel 690
2.4856		NiCr22Mo9Nb		NA21		NC22FeDNb					N06625	Inconel 625
2.4858		NiCr21Mo		NA16		NC21FeDU					N08825	KHN38VT Incoloy 825

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 34 Heat resistant super alloys Ni or Co Based, Aged HB 350 HRc 38</p>												
2.4375		NiCu30Al	4676	NA18		NU30AT					N05500	Monel500
2.4662		NiFe5Cr14MoTi	5660			Z5NCDT42					N09901	Incoloy 901
2.4668		NiCr19Fe19NbMo	5383	HR8		NC19eNB					N07718	Inconel 718
2.4670		S-NiCr13A16MoNb	5391	Mar-46		NC12AD						Nimocast 713
2.4694		NiCr16Fe7TiAl									N07751	Inconel 751
2.4955		NiFe25Cr20NbTi										
2.4964		CoCr20W15Ni	5772			KC20WN						Haynes 25
		CoCr22W14Ni	AMS 5772			KC22WN						

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 35 Heat resistant super alloys Ni or Co Based, Cast HB 320 HRc 34</p>												
2.4669		NiCr15Fe7TiAl				NC15TNbA					N07750	Inconel X750
2.4685		G-NiMo28									N10665	Hastelloy B
2.4810		G-NiMo30										Hastelloy C
2.4973		NiCr19Co11MoTi	AMS 5399			NC19KDT					VT5-1	
3.7115		TiAl5Sn2									R54520	VT1-00 ATI Grade 6

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 36 Titanium alloys Pure Titanium HB 400 Rm</p>												
2.4674		NiCo15Cr10MoAlTi	AMS 5397								N13100	IN 100
3.7025		Ti1	R50250	2TA1							R50250	ATI 30 CP Gr. 1
3.7225		Ti1pd	R52250	TP1							R52250	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>S VDI 3323 37 Titanium alloys Alpha + Beta Alloys, Hardened HB 1050 Rm</p>												
3.7124		TiCu2		2TA21-24								
3.7145		TiAl6Sn2Zr4Mo2Si	R54620								R54620	
3.7165		TiAl6V4	AMS R56400	TA10-13		T-A6V						VT6
3.7185		TiAl4Mo4Sn2		TA45-51								
3.7195		TiAl3V2.5									R56320	ATI 3-2.5
		TiAl4Mo4Sn4Si0.5										
		TiAl5Sn2.5	AMS R54520	TA14/17		T-A5E						
		Ti6Al4VELI	AMS R56401	TA11								

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>H VDI 3323 38 Material Description: Hardened steel Composition / Structure / Heat Treatment: Hardened HB: 550 HRc: 55</p>												
1.1231	S70 C-CSP	Ck 67	1070	060 A 67	C 67S	XC 68	1770	C 70	F.5103		70	
1.1248	C75	Ck 75	1078, 1080	060 A 78	C 75S	XC 75	1774	C 75	F.5107		75	
1.1274	SUP 4	Ck 101	1095	060 A 96	C 100S	XC100	1870	C100	F.5117			
1.1545	SK 3	C 105 W1	W1	BW 2	C 105U	Y1 105	1880	C 100 KU	F.5118		U10A	
1.2762		75CrMoNiW67	-	-	-	-	-	-	-			
1.3401	SCMnH1	GX120Mn12	A128(A)			Z120M12	2183	GX120Mn12	F.8251		110G13L	
1.4021	SUS 420 J1	X 20 Cr 13	420	420 S 37	X 20 Cr 13	Z 20 C 13	2303	X 20 Cr 13	F.5261		20KH13	ATI 420
1.4109	SUS 440 A	X 65 CrMo 14	440 A	-	X 70 CrMo 15	Z 70 D 14	-	-				ATI 440A
1.4112	SUS 440 B	X 90 CrMoV 18	440 B	409 S 19	X 90 CrMoV 18	Z 2 CND 18 05	2327	X CrTi 12				
1.4125	SUS 440 C	X 105 CrMo 17	440 C	-	X 105 CrMo 17	Z 100 CD 17	-	X 105 CrMo 17			95KH18	ATI 440C
1.6746		32NiCrMo14-5	-	832M31	32nicRm0145	35NCD14	-	-				
1.7176	SUP9(A)	55Cr3	5155	527A60	48	55C3	2253	55Cr3				
1.7225	SCM 440 (H)	42CrMo4	4140	708 M 40	42 CrMo 4	42 CD 4	2244	42 CrMo 4	F.1252		38HM	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>H VDI 3323 40 Material Description: Chilled cast iron Composition / Structure / Heat Treatment: Cast HB: 400 HRc: 42</p>												
0.9620		GX260NiCr42	A532 1B	Grade 2 A	GJN-HV520	FB Ni4 Cr2 BC	0512	-			F45001	Ni-Hard2
0.9625		GX330NiCr42	A532 1A	Grade 2 B	GJN-HV550	FB Ni4 Cr2 HC	0513	-			F45000	Ni-Hard1
0.9630		GX300 CrNiSi 9 5 2	A532 1D	Grade 2 C	GJN-HV600	FB Cr9 Ni5	0457	-			F45003	Ni-Hard 4
0.9640		GX300CrMoNi1521	-	-	-	-	-	-			F45005	
0.9650		GX260Cr27	-	Grade 3 D	-	-	0466	-				
0.9655		GX300CrNiMo271	-	Grade 3 E	-	-	-	-			20C 25N20S2	
1.4841	SUH 310	X15CrNiSi25-20	310	314S31	X 15 CrNiSi 25 20	Z15CNS25-20	-	-			S31400	Cronifer 2520


Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p>H VDI 3323 41 Material Description: Hardened cast iron Composition / Structure / Heat Treatment: Hardened HB: 550 HRc: 55</p>												
0.9635		GX300 CrMo 15 3	-	-	-	-	-	-				
0.9645		GX260 CrMoNi 20 21	-	-	-	-	-	-			F45007	

EDP No. INDEX

EDP No.	Page	EDP No.	Page	EDP No.	Page
C1109	434	D5407	165-166	DV333	311
C1119	435	D5432	133-135	DV334	312
C1132	438	D5433	136-138	DV383	316
C1136	436	D5434	139-140	K1143	408-409
C1139	437	DGR493	101-102	K1153	410-411
C3109	434	DGR495	103-104	K2101	412-413
C3119	435	DH404	78-79	K2102	417-418
C3132	438	DH406	86-88	K2111	414-415
C3136	436	DH408	89-91	K2112	419-420
C3139	437	DH421	92-93	K2121	416
CDRA03	171-173	DH423	80-82	K21B1	421-426
CDRA04	174-176	DH424	83-85	K4101	406
D1100	259-260	DH450	113-115	K4111	407
D1105	247-251	DH451	121-123	Y101H	38
D1106	261-262	DH452	124-126	Y121H	39
D1107	238-240	DH453	127-128	Y141H	40
D1121	257	DH500	159	Y161H	41
D1125	252-254	DH510	150	Y181H	42
D1205	289-291	DH515	151	Y201H	43
D1206	292	DH520	151	Y221H	44
D1209	293	DHM10	152	Y241H	45
D1210	294	DHM15	152	Y261H	46
D1303	313	DHM20	152	Y281H	46
D1313	314	DHM25	153	Y301H	47
D1343	313	DHM30	153	Y321H	47
D1353	314	DI473	145	YA1A	58
D1363	315	DJ543	192-194	YA2C	58
D1373	315	DJ544	195-197	YB1A	59
D1GP125	206-208	DL105	244-246	YB2C	59
D1GP165	209-211	DL109	258	YC1A	60
D2104	255-256	DL205	288	YC2C	60
D2105	241-243	DL504	271	YD1A	61
D2107	234-237	DL505	269-270	YD2C	61
D2306	302	DL507	274-275	YE1A	62
D2307	303	DL508	265-266	YE2C	62
D2320	304	DL509	267-268	YF1A	63
D2321	302	DL510	263-264	YF2C	63
D2322	303	DL608	273	YG1A	64
D2323	304	DLGP195	212-214	YG2C	64
D4541	182-185	DLGP506	215-217	YH1A	65
D4542	186-191	DPP447	110-112	YH2C	65
D5303	310	DSH105	223-225	YI1A	66
D5306	300	DT600	272	YI2C	66
D5307	300	DT692	272	YJ1A	67
D5320	301	DT693	272	YJ2C	67
D5405	163-164	DV303	311		



Global Cutting Tool Leader **YG-1**

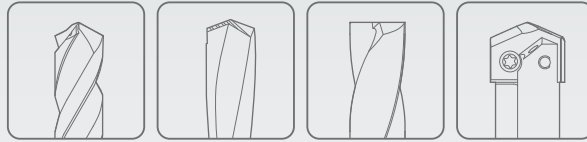

HOLEMAKING



HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets